

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China







40



Toll Free: (800) 494-6104


#### Wiha TorqueControl Adapters

#### Adapters For TorqueFix<sup>™</sup> & TorqueVario<sup>™</sup>











See pages 211-215 for Sockets






See pages 159-160 for Micro bits





<b>Bits</b> Shaft CVM steel, hardened, corrosion protected.								
Item		===		<b>₽</b>				
No.	Size	mm	mm	lbs.	pkg.			
288 82	1/4	162	4.0	.09	1			

See pages 185-197 for Insert bits

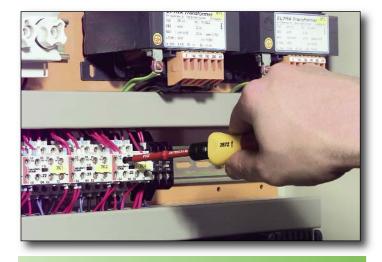

#### See Insulated Tools On Pages 87-110



### Wiha Insulated TorqueControl Tools





Includes Certificate



Insulated TorqueVario-S, With Window Scale Insulation

up to 1000 Volt. EN 60900, VDE, ASTM F-1505, NFPA

EN ISO 6798, BS EN 26789, ASME B107.14M, VDE, ASTM F-1505-01

NFPA70E, +/- 6% Accuracy Ergonomic multi-component handle, light and compact. Handle sizes proportioned to optimize torque range.

Audible and perceptible click when torque setting has been attained.

Item	Range		=	<b>↓</b>		
No.	Inch lbs.	Increments	mm	lbs.	pkg.	
285 14	7.5 - 20	.5 Inch lbs	126 - 131	.43	1	
285 16	10 - 50	2 Inch lbs	133 - 138	.40	1	
285 20	20 - 70	2 Inch lbs	137 - 142	.69	1	

# Each TorqueVario handle has unique serial number and certificate of calibration

10,000 Volt
Tested

SHOP

Insulated Slotted Interchangeable Blades For TorqueVario-S Slotted tip blades on narrow 5/32 Hex shafts. High alloy chromevanadium-molybdenum tool steel, hardened. VDE Insulated.

14.144.4.1.1.1.1.1.1.1.1.1.1.1.1.1.1.1.								
Item	0	0	===	<b>-</b> →	Max. Torque			
No.	mm	Inch	mm	lbs.	Nm	pkg.		
287 01	3.0	.118	190	.07	0.6	1		
287 03	3.5	.139	190	.07	1.1	1		
287 05	4.0	.157	190	.07	2.5	1		
287 07	5.5	.216	190	.07	3.8	1		

These Insulated Blades work in Insulated handles only

Tested

PH1 207 PRINE 33 Nov./ 25-2 N. Pac. max.

SHOP

10,000 Volt

Insulated Phillips Interchangeable Blades For TorqueVario-S
Phillips tip blades on narrow 5/32 Hex shafts. High alloy chrome-vanadium-molybdenum tool steel, hardened. VDE Insulated.

Item	<b>•</b>	===		•	Max. Torque		
No.	Size	mm	mm	lbs.	Nm	pkg.	
287 10	0	190	4.0	.07	0.9	1	
287 11	1	190	4.0	.07	3.8	1	
287 12	2	190	4.0	.07	5.5	1	

These Insulated Blades work in Insulated handles only

