



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



## Multi- Aperture cores (2861002402)

Part Number: 2861002402

67 MULTI- APERTURE CORE

Explanation of Part Numbers:

- Digits 1 & 2 = Product Class
- Digits 3 & 4 = Material Grade
- - Last digit 2 = Burnished

**Multi- aperture cores are used in suppression applications and in balun (balance- unbalance) and other broadband transformers. They are also employed in airbag designs to prevent accidental activation.**

- All multi- aperture cores are supplied burnished.
- Our “Multi- Aperture Core Kit” (part number 0199000036) is available for prototype evaluation.

**For any multi- aperture requirement not listed here, feel free to contact our customer service group for availability and pricing.**

Weight: 0.5 (g)

Dim	mm	mm tol	nominal inch	inch misc.
A	7	±0.25	0.276	—
B	6.2	±0.25	0.244	—
C	4.2	-0.25	0.16	—
E	2.9	±0.10	0.114	—
H	1.7	+0.20	0.071	—




Figure 1

### Chart Legend

+ Test frequency

Typical Impedance (Ω)	
100 MHz	80
250 MHz <sup>+</sup>	118


Electrical Properties	
A <sub>L</sub> (nH)	160 Min

Multi- aperture cores in 73 and 43 materials are controlled for impedance only. The 61 NiZn material is controlled for both impedance and A<sub>L</sub> value. The high frequency 67 material is controlled for A<sub>L</sub> value. Minimum impedance values are specified for the + marked frequencies. The minimum impedance is typically the listed impedance less 20%.

□ Multi- aperture cores in 73 and 43 material are measured for impedance on the 4193A Vector Impedance Analyzer. The 61 and 67 multi- aperture cores are tested on the 4291A Impedance Analyzer. All impedance measurements are performed with a single turn to both holes, using the shortest practical wire length.

□ The 61 and 67 material multi- hole beads are tested for A<sub>L</sub> value. The test frequency is 10 kHz at < 10 gauss. The test winding is five turns wound through both holes.

2861002402

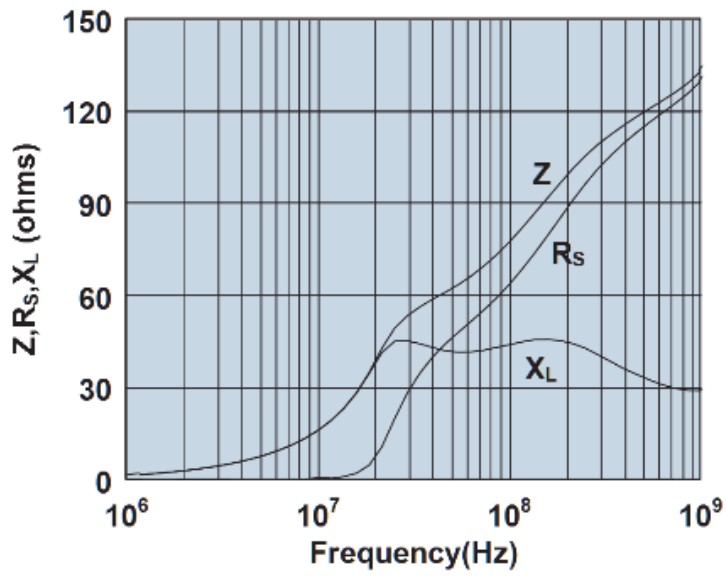

Impedance, reactance, and resistance vs. frequency.