



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



IB IL 120 PWR IN-PAC


Order No.: 2861454



<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2861454>

Inline power terminal block, complete with accessories (connector and labeling field), without fuse, 120 V AC



Commercial data	
GTIN (EAN)	 4 017918 907402
Note	Made-to-order
sales group	K417
Pack	1 pcs.
Customs tariff	85369010
Catalog page information	Page 267 (AX-2009)

Product notes

WEEE/RoHS-compliant since:
12/08/2009



<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data

Interfaces	
Type of connection	8-pos. Inline power connector
Interface	Supply voltage
Power supply	
I/O voltage	120 V AC

Peripherals voltage range	108 V AC ... 135 V AC (including all tolerances, including ripple)
Max. current consumption	8 A

General data

Type of protection	Surge protection
Weight	80 g
Width	36.6 mm
Height	119.8 mm
Depth	71.5 mm

Inline potential routing

Main circuit supply U_M	120 V AC (nominal value)
Power supply at U_M	8 A (nominal value)

Certificates / Approvals




Certification CUL, GOST, UL

Accessories


Item	Designation	Description
Marking		
0809492	ESL 62X10	Insert strip for laser printer, lettering field: 62 x 10 mm
2727501	IB IL FIELD 2	Labeling field, width: 12.2 mm
Plug/Adapter		
2740180	IB IL AC-PWR-IN-PLSET	Connector set, for Inline input terminal blocks with AC voltage

Diagrams/Drawings

Connection diagram

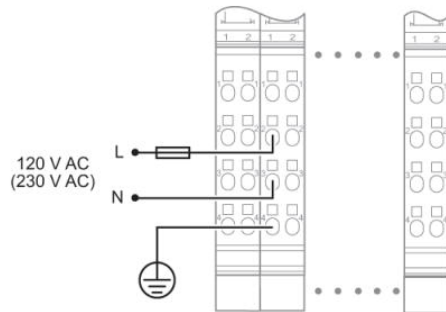

Dimensioned drawing

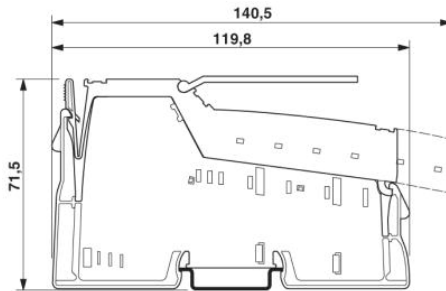

Address

PHOENIX CONTACT Deutschland GmbH
Flachmarktstr. 8
32825 Blomberg, Germany
Phone +49 5235 3 12000
Fax +49 5235 3 41200
<http://www.phoenixcontact.de>



© 2011 Phoenix Contact
Technical modifications reserved;