



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



# IB IL 24 DO 8-NPN-PAC


Order No.: 2863546



<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2863546>

Inline digital output terminal, complete with accessories (connector and labeling field), 8 outputs, 24 V DC, npn-wired, 2 mA, 2, 3-conductor connection system



| Commercial data          |  |
|--------------------------|--|
| GTIN (EAN)               | <br>4 017918 941222 |
| sales group              | K411   |
| Pack                     | 1 pcs.   |
| Customs tariff           | 85389091   |
| Catalog page information | Page 277 (AX-2009)   |

### Product notes

WEEE/RoHS-compliant since:  
10/28/2008



<http://www.download.phoenixcontact.com>  
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

## Technical data

| General data |          |
|--------------|----------|
| Width        | 48.8 mm  |
| Height       | 119.5 mm |
| Depth        | 71.5 mm  |

|  |   |
|--|---|
| Note on dimensions                       | Housing dimensions  |
| Weight                                   | 130 g   |
| Note on weight specifications            | Without plug  |
| Mounting type                            | DIN rail  |
| Ambient temperature (operation)          | -25 °C ... 55 °C  |
| Ambient temperature (storage/transport)  | -25 °C ... 85 °C  |
| Permissible humidity (operation)         | 10 % ... 95 % (according to DIN EN 61131-2)   |
| Permissible humidity (storage/transport) | 10 % ... 95 % (according to DIN EN 61131-2)   |
| Air pressure (operation)                 | 70 kPa ... 106 kPa (up to 3000 m above sea level)   |
| Air pressure (storage/transport)         | 70 kPa ... 106 kPa (up to 3000 m above sea level)   |
| Degree of protection                     | IP20  |
| Protection class                         | III, IEC 61140, EN 61140, VDE 0140-1  |
| Test section                             | 5 V supply incoming remote bus/7.5 V supply (bus logic) 500 V AC 50 Hz 1 min  |
|  | 5 V supply outgoing remote bus/7.5 V supply (bus logic) 500 V AC 50 Hz 1 min  |
|  | 7.5 V supply (bus logics)/24 V supply (I/O) 500 V AC 50 Hz 1 min  |
|  | 24 V supply (I/O) / functional earth ground 500 V AC 50 Hz 1 min  |
| Diagnostics messages                     | Short-circuit / overload of the digital outputs Error message in the diagnostic code (bus) and display (2 Hz) via the LED (D) on the module |

#### Interface

|                    |                    |
|--------------------|--------------------|
| Name               | Local bus          |
| Type of connection | Inline data jumper |
| Transmission speed | 500 kBaud          |

#### Power supply for module electronics

|                            |  |
|----------------------------|--|
| Supply voltage             | 24 V DC (via voltage jumper)                                       |
| Supply voltage range       | 19.2 V DC ... 30 V DC (including all tolerances, including ripple) |
| Supply current             | 32 mA  |
| Communications power $U_L$ | 7.5 V (via voltage jumper)   |
| Current consumption        | max. 60 mA (from the local bus)                                    |

#### Inline potential routing

|                                |                         |
|--------------------------------|-------------------------|
| Communications power $U_L$     | 7.5 V DC                |
| Current consumption from $U_L$ | max. 60 mA              |
| Segment supply voltage $U_S$   | 24 V DC (nominal value) |
| Current consumption from $U_S$ | max. 8 A                |

**Digital outputs**

|                                    |  |
|------------------------------------|--|
| Output name                        | Digital outputs  |
| Output description                 | With negative logic                                      |
| Type of connection                 | Spring-cage connection                                   |
| Connection method                  | 2, 3, 4-wire   |
| Number of outputs                  | 8  |
| Protective circuit                 | Overload protection, short-circuit protection of outputs |
| Output voltage                     | 23 V ( $U_s - 1$ V)                                      |
| Nominal output voltage             | 24 V DC (voltage difference at $I_{nom} \leq 1$ V)       |
| Maximum output current per channel | 500 mA   |
| Maximum output current per module  | 4 A  |
| Nominal load, inductive            | 24 VA  |
| Nominal load, lamp                 | 24 W   |
| Nominal load, ohmic                | 24 W   |

**Certificates / Approvals**



|                             |                       |
|-----------------------------|-----------------------|
| Certification               | ABS, CUL, DNV, GL, UL |
| Certification Ex:           | CUL-EX LIS, UL-EX LIS |
| Certifications applied for: | LR / BV               |

**Accessories**

| Item | Designation | Description |
|------|-------------|-------------|
|------|-------------|-------------|

**Marking**

|         |               |   |
|---------|---------------|---|
| 0809492 | ESL 62X10     | Insert strip for laser printer, lettering field: 62 x 10 mm |
| 2727501 | IB IL FIELD 2 | Labeling field, width: 12.2 mm                              |


**Plug/Adapter**

|         |                |   |
|---------|----------------|---|
| 2726337 | IB IL SCN-8    | Connector, for digital 1, 2 or 8-channel Inline terminals |
| 2727608 | IB IL SCN-8-CP | Inline connector, colored                                 |

## Diagrams/Drawings


### Connection diagram

---

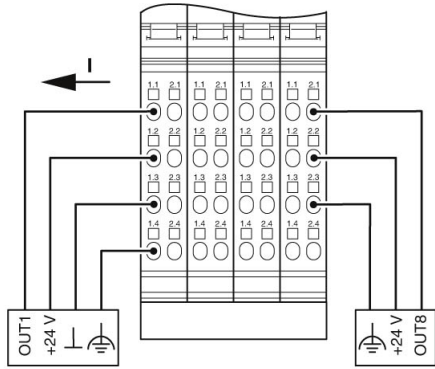

### Dimensioned drawing

---

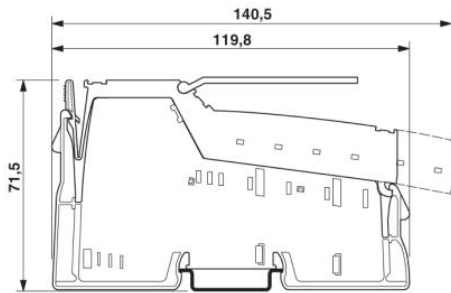

**Address**

PHOENIX CONTACT Deutschland GmbH  
Flachmarktstr. 8  
32825 Blomberg, Germany  
Phone +49 5235 3 12000  
Fax +49 5235 3 41200  
<http://www.phoenixcontact.de>



© 2011 Phoenix Contact  
Technical modifications reserved;