



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



Electronic housing - ME 45 OT-MSTBO SET KMGY - 2869032

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://download.phoenixcontact.com>)

Upper part of housing, double-level, for COMBICON connection, housing width: 45 mm



The illustration shows the green product version

Product Features

- ✓ Tool-free mounting
- ✓ ME...TBUS connector with 5 parallel contacts can be snapped onto DIN rails to save space
- ✓ Large assembly area
- ✓ Gold contacts for data transmission and power supply (125 V, 8 A)
- ✓ Low design width with a high number of positions
- ✓ When a device is unplugged from the system as a whole, the signal chain is not interrupted# Supply via standard MINI COMBICON plug
- ✓ Recessed labeling areas
- ✓ Same PCB geometry for all design widths
- ✓ Fast mounting on DIN rails according to EN 60715
- ✓ Inflammability class V0 according to UL 94
- ✓ Cost savings thanks to easy device production
- ✓ Material and part identification embossed on the housing (recyclability)
- ✓ Metal foot catch
- ✓ Functional earth ground contact (EMC) integrated in the housing base
- ✓ Optional BUS connection integrated in the housing, for either parallel or serial contacting
- ✓ Electronic components can be partially removed



Key commercial data

| | |
|--------------------------------------|------------|
| Packing unit | 1 1 |
| Minimum order quantity | 10 1 |
| Weight per Piece (excluding packing) | 106.47 GRM |
| Custom tariff number | 85369010 |
| Country of origin | Germany |

Electronic housing - ME 45 OT-MSTBO SET KMGY - 2869032

Technical data

General

| | |
|------------------|-------------------|
| Housing type | Component housing |
| Housing material | Polyamide |
| Color | light gray |

Dimensions

| | |
|-----------------------|---------|
| Constructional height | 38.5 mm |
| Width | 45 mm |

Technical data

| | |
|---|-------|
| Connection in acc. with standard | CUL |
| Nominal voltage U_N | 300 V |
| Nominal current I_N | 12 A |
| AWG/kcmil | 30-12 |
| Indicator1 | CUL1 |
| Inflammability class according to UL 94 | V0 |
| Number of positions | 32 |
| | 64 |

Classifications

eCl@ss

| | |
|------------|----------|
| eCl@ss 4.0 | 27180401 |
| eCl@ss 4.1 | 27180401 |
| eCl@ss 5.0 | 27180506 |
| eCl@ss 5.1 | 27180506 |
| eCl@ss 6.0 | 27180802 |
| eCl@ss 7.0 | 27182702 |
| eCl@ss 8.0 | 27182702 |

ETIM

| | |
|----------|----------|
| ETIM 2.0 | EC001031 |
| ETIM 3.0 | EC001031 |
| ETIM 4.0 | EC001031 |
| ETIM 5.0 | EC000886 |

UNSPSC

| | |
|---------------|----------|
| UNSPSC 6.01 | 31261501 |
| UNSPSC 7.0901 | 31261501 |

Electronic housing - ME 45 OT-MSTBO SET KMGY - 2869032

Classifications

UNSPSC

| | |
|--------------|----------|
| UNSPSC 11 | 31261501 |
| UNSPSC 12.01 | 31261501 |
| UNSPSC 13.2 | 31261501 |

Approvals

Approvals

Approvals

UL Recognized / cUL Recognized / cULus Recognized

Ex Approvals

Approvals submitted

Approval details

UL Recognized

cUL Recognized


| | B | D |
|--------------------------------|-------|-------|
| mm ² /AWG/kcmil | 30-12 | 30-12 |
| Nominal current I _N | 12 A | 10 A |
| Nominal voltage U _N | 250 V | 300 V |

cULus Recognized


Drawings

Electronic housing - ME 45 OT-MSTBO SET KMGY - 2869032

Dimensioned drawing

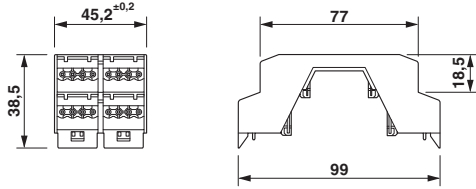


Schematic diagram

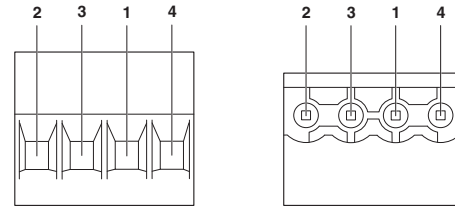

Pin assignment left

Schematic diagram

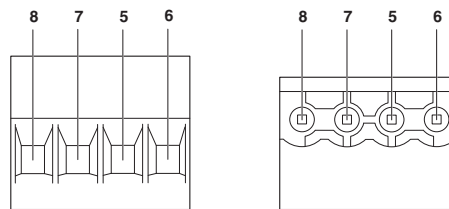

Pin assignment right