



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!




## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



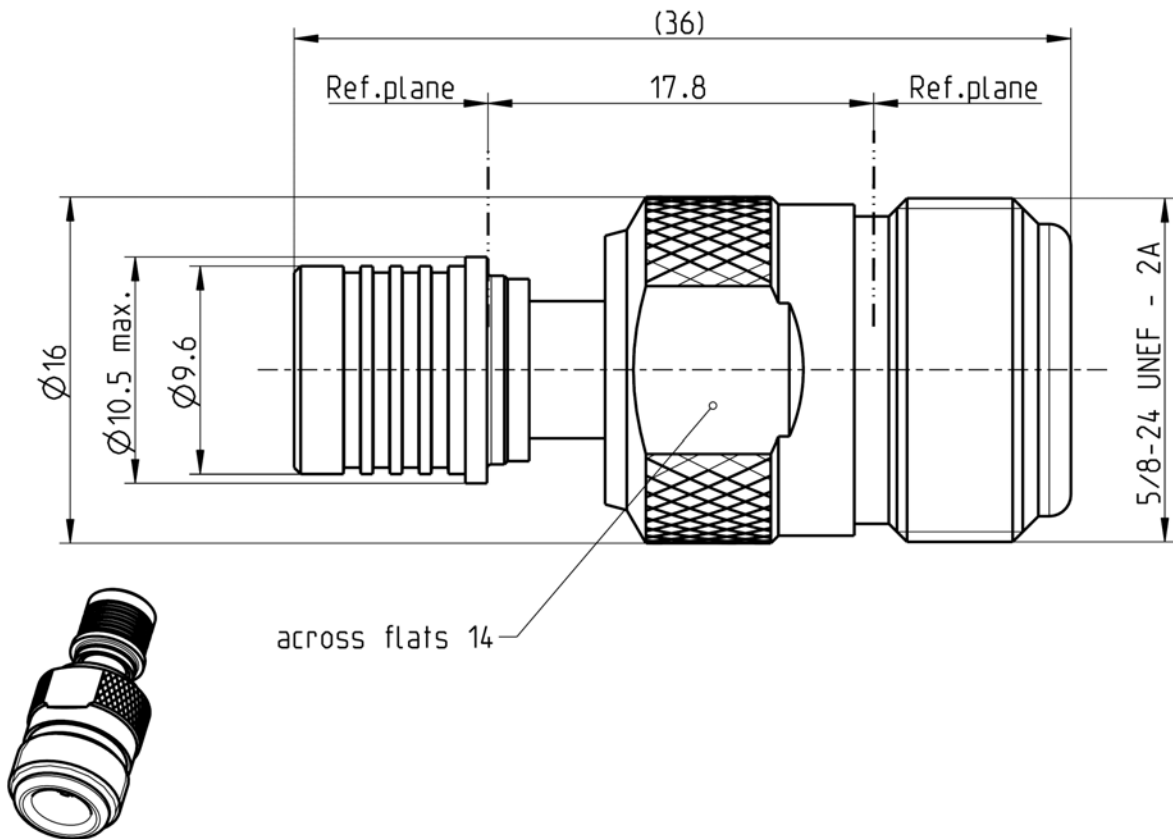

All dimensions are in mm; tolerances according to ISO 2768 m-H

**Interface**

According to	N side	IEC 60169-16, MIL-PRF-39012, CECC 22210
	QMA side	Rosenberger 28S000-000, series QMA
		Rosenberger is an authorised QLF® manufacturer

**Documents**

N/A

**Material and plating**

**Connector parts**

Center contact  
Outer contact QMA side  
Outer contact N side  
Body  
Dielectric

**Material**

CuBe  
Spring bronze  
Brass  
Brass  
PTFE

**Plating**

AuroDur®, gold plated  
White bronze(e.g. Optalloy®)  
Flash white bronze over silver(e.g. Optargen®)  
Flash white bronze over silver(e.g. Optargen®)

**Electrical data**

Impedance	50 Ω	
Frequency	DC to 11 GHz	
Return loss	≥ 32 dB, DC to 3 GHz	
	≥ 21 dB, 3 to 8 GHz	
Insertion loss	≤ 0.05 dB	
Insulation resistance	≥ 5 x10 <sup>3</sup> MΩ	
Center contact resistance	≤ 1 mΩ, N side	≤ 3 mΩ, QMA side
Outer contact resistance	≤ 0.25 mΩ, N side	≤ 2.5 mΩ, QMA side
Test voltage (at sea level)	1000 V rms	
Working voltage (at sea level)	480 V rms	
RF-leakage	≥ 95 dB up to 2 GHz	
Intermodulation (3 <sup>rd</sup> order)	≤ -130 dBc @ 2 x 20 W, 1800 MHz	

**Mechanical data**

	N side	QMA side
Mating cycles	min. 500	min. 100
Center contact captivation: axial	≥ 28 N	≥ 28 N
Coupling test torque	max. 1.7 Nm	N/A
Recommended torque	0.7 Nm to 1.1 Nm	N/A
Engagement force	N/A	typ. 25N
Disengagement force	N/A	typ. 20N
Retention force for interface	N/A	60N min.

**Environmental data**

Temperature range	-40°C to +85°C
Storage temperature	-40°C to +85°C
Thermal shock	IEC 60169-1 16.4 (-40 / +85°C)
Corrosion	IEC 60169-1 16.7 (48 hrs)
Vibration	IEC 60068-2-64 random
Damp heat, steady state	IEC 60169-1 16.3 (96 hrs)
RoHS	compliant

**Weight**

Weight	27 g/pce
--------	----------

While the information has been carefully compiled to the best of our knowledge, nothing is intended as representation or warranty on our part and no statement herein shall be construed as recommendation to infringe existing patents. In the effort to improve our products, we reserve the right to make changes judged to be necessary.

Draft	Date	Approved	Date	Rev.	Engineering change number	Name	Date
Schmid Markus	20/03/06	Sa. Krautenbacher	13.03.14	c00	14-0352	T. Krojer	13.03.14
Rosenberger Hochfrequenztechnik GmbH & Co. KG P.O.Box 1260 D-84526 Tittmoning Germany <a href="http://www.rosenberger.de">www.rosenberger.de</a>					Tel.: +49 8684 18-0 Fax: +49 8684 18-499 email: <a href="mailto:info@rosenberger.de">info@rosenberger.de</a>		Page 2 / 2