



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



Relay Module - RIF-0-RSC-24DC/ 1AU - 2903364

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Pre-assembled relay module with screw connection, consisting of: relay base with ejector and multi-layer gold contact relay. Contact type: 1 N/O contact. Input voltage: 24 V DC

Key Commercial Data

| | |
|--------------|---------------|
| Packing unit | 10 STK |
| GTIN | |
| GTIN | 4046356731973 |

Technical data

Note

| | |
|-------------------------|---|
| Utilization restriction | EMC: class A product, see manufacturer's declaration in the download area |
|-------------------------|---|

Dimensions

| | |
|--------|--------|
| Width | 6.2 mm |
| Height | 84 mm |
| Depth | 68 mm |

Coil side

| | |
|---|---------------|
| Nominal input voltage U_N | 24 V DC |
| Input voltage range in reference to U_N | see diagram |
| Typical input current at U_N | 9 mA |
| Typical response time | 5 ms |
| Typical release time | 8 ms |
| Coil voltage | 24 V DC |
| Protective circuit | Damping diode |
| Operating voltage display | Yellow LED |
| Power dissipation for nominal condition | 0.22 W |

Relay Module - RIF-0-RSC-24DC/ 1AU - 2903364

Technical data

Contact side

| | |
|--|--|
| Contact type | 1 N/O contact |
| Type of switch contact | Single contact |
| Contact material | AgSnO, hard gold-plated |
| Maximum switching voltage | 30 V AC 36 V DC |
| Minimum switching voltage | 100 mV (at 10 mA) |
| Min. switching current | 1 mA (at 12 V) |
| Maximum inrush current | 50 mA |
| Limiting continuous current | 50 mA |
| Interrupting rating (ohmic load) max. | 1.2 W (at 24 V DC) |
| Switching capacity in acc. with DIN VDE 0660/IEC 60947 | 1 A (24 V (DC13)) 3 A (230 V (AC 15)) |

Contact side (with destroyed gold layer)

| | |
|--|--|
| Contact material | AgSnO |
| Note | the following values are applicable if a gold layer is destroyed |
| Maximum switching voltage | 250 V AC/DC |
| Minimum switching voltage | 5 V (at 100 mA) |
| Limiting continuous current | 6 A |
| Min. switching current | 10 mA (at 12 V) |
| Interrupting rating (ohmic load) max. | 140 W (at 24 V DC) 20 W (at 48 V DC) 18 W (at 60 V DC) 23 W (at 110 V DC) 40 W (at 220 V DC) 1500 VA (for 250 V AC) |
| Switching capacity in acc. with DIN VDE 0660/IEC 60947 | 2 A (at 24 V, DC13) 0.2 A (at 110 V, DC13) 0.1 A (at 220 V, DC13) 3 A (at 24 V, AC15) 3 A (at 120 V, AC15) 3 A (at 230 V, AC15) |

Connection data input side

| | |
|--|---|
| Connection name | Coil side |
| Connection method | Screw connection |
| Stripping length | 7 mm |
| Conductor cross section solid | 0.5 mm ² ... 4 mm ² |
| Conductor cross-section solid (2 conductors with same cross section) | 0.5 mm ² ... 1.5 mm ² |
| Conductor cross section flexible | 0.5 mm ² ... 2.5 mm ² |
| | 0.5 mm ² ... 2.5 mm ² (Ferrules without plastic sleeve) |
| | 0.5 mm ² ... 1.5 mm ² (Ferrule with plastic sleeve) |

Relay Module - RIF-0-RSC-24DC/ 1AU - 2903364

Technical data

Connection data input side

| | |
|---|--|
| Conductor cross section flexible (2 conductors with same cross section) | 0.5 mm ² ... 1.5 mm ² |
| | 0.5 mm ² ... 1 mm ² (TWIN ferrule with plastic sleeve) |
| Conductor cross section AWG | 20 ... 12 (solid) |
| | 20 ... 14 (flexible) |
| Torque | 0.5 Nm ... 0.6 Nm |

Connection data output side

| Connection name | Contact side |
|---|---|
| Connection method | Screw connection |
| Stripping length | 7 mm |
| Conductor cross section solid | 0.5 mm ² ... 4 mm ² |
| Conductor cross-section solid (2 conductors with same cross section) | 0.5 mm ² ... 1.5 mm ² |
| Conductor cross section flexible | 0.5 mm ² ... 2.5 mm ² |
| | 0.5 mm ² ... 2.5 mm ² (Ferrules without plastic sleeve) |
| | 0.5 mm ² ... 1.5 mm ² (Ferrule with plastic sleeve) |
| Conductor cross section flexible (2 conductors with same cross section) | 0.5 mm ² ... 1.5 mm ² |
| | 0.5 mm ² ... 1 mm ² (TWIN ferrule with plastic sleeve) |
| Conductor cross section AWG | 20 ... 12 (solid) |
| | 20 ... 14 (flexible) |
| Torque | 0.5 Nm ... 0.6 Nm |

General

| | |
|--|-------------------------------------|
| Test voltage relay winding/relay contact | 4 kV _{rms} (50 Hz, 1 min.) |
| Operating mode | 100% operating factor |
| Degree of protection | IP20 (Relay base) |
| | RT III (Relay) |
| Mechanical service life | approx. 2x 10 ⁷ cycles |
| Mounting position | any |
| Assembly instructions | In rows with zero spacing |

Standards and Regulations

| | |
|--|----------------|
| Standards/regulations | DIN EN 50178 |
| Rated insulation voltage | 250 V AC |
| Rated surge voltage | 6 kV |
| Insulation | safe isolation |
| Degree of pollution | 2 |
| Overvoltage category | III |
| Flammability rating according to UL 94 | V2 |

Environmental Product Compliance

| | |
|------------|--|
| REACH SVHC | Lead 7439-92-1 |
| China RoHS | Environmentally Friendly Use Period = 50 |

Relay Module - RIF-0-RSC-24DC/ 1AU - 2903364


Technical data

Environmental Product Compliance

| | |
|--|---|
| | For details about hazardous substances go to tab "Downloads", Category "Manufacturer's declaration" |
|--|---|


Drawings

Circuit diagram




DC coils

Diagram

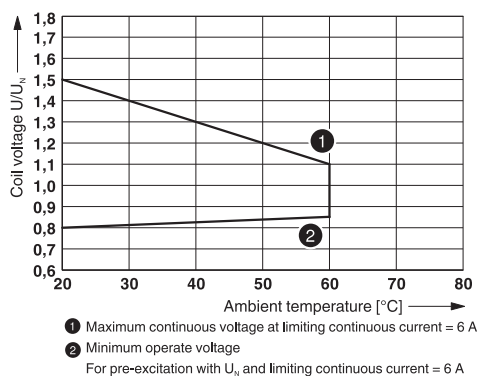


Operating voltage range

Diagram

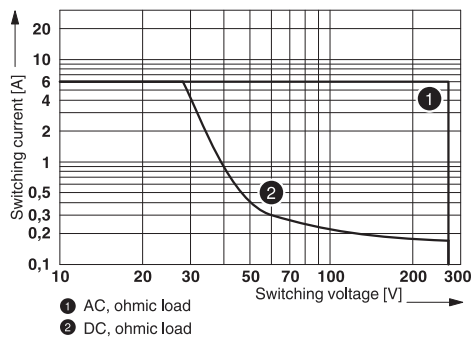

Interrupting rating


Diagram

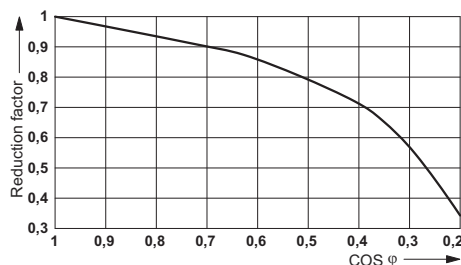

Service life reduction factor

Relay Module - RIF-0-RSC-24DC/ 1AU - 2903364

Diagram

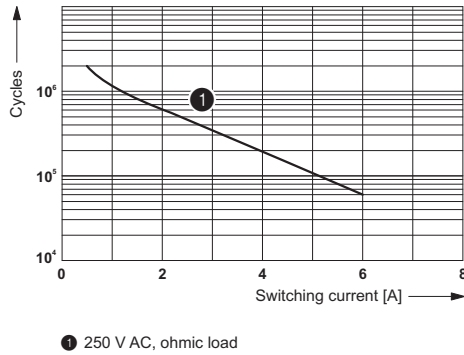

Electrical service life

Articles in set

Single relay - REL-MR- 24DC/21AU - 2961121



Plug-in miniature power relay, with multi-layer gold contact, 1 PDT, input voltage 24 V DC

Relay base - RIF-0-BSC/ 1 - 2901872



RIF-0... relay base, for miniature power relay with 1 N/O contact or identical solid-state relays, screw connection, for mounting on NS 35/7,5

Approvals

Approvals

Approvals

DNV GL / EAC

Ex Approvals

Approval details

DNV GL

<http://exchange.dnv.com/tari/>

TAA000018V

Relay Module - RIF-0-RSC-24DC/ 1AU - 2903364

Approvals

EAC



RU C-
DE.A*30.B.01082

Phoenix Contact 2018 © - all rights reserved
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg
Germany
Tel. +49 5235 300
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>