



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



Active module - VIP-8RPT-24DC/21/DO/FU/PLC - 2903601

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)




VARIOFACE Professional output module with eight channels, each with a pluggable 1 PDT relay and fuse, for 24 V DC

Why buy this product

- Slim overall width of just 87.6 mm
- LED status indicator per signal path and supply voltage
- Polarity protection diode
- Fuse per output circuit as short-circuit protection
- Plug-in miniature relays each with a SPDT



Key Commercial Data

Packing unit	1 STK
GTIN	 4 046356 948159
GTIN	4046356948159

Technical data

Note

Utilization restriction	EMC: class A product, see manufacturer's declaration in the download area
-------------------------	---

Dimensions

Width	87.6 mm
Height	109.8 mm
Depth	63 mm

Ambient conditions

Ambient temperature (operation)	-20 °C ... 60 °C
Ambient temperature (storage/transport)	-20 °C ... 70 °C

Input data

Active module - VIP-8RPT-24DC/21/DO/FU/PLC - 2903601

Technical data

Input data

Nominal input voltage U_N	24 V DC
Input voltage range in reference to U_N	0.9 ... 1.1
Typical input current at U_N	9 mA
Typical response time	5 ms
Typical release time	8 ms
Type of protection	Free-wheeling diode
Protective circuit/component	Damping diode
Operating voltage display	Green LED
Status display/channel	Yellow LED

Output data

Contact type	Single contact, 1-PDT
Contact material	AgSnO
Maximum switching voltage	250 V AC/DC
Minimum switching voltage	12 V AC/DC
Limiting continuous current	5 A (observe derating)
Min. switching current	10 mA
Interrupting rating (ohmic load) max.	120 W (24 V DC)
	20 W (48 V DC)
	18 W (60 V DC)
	23 W (110 V DC)
	40 W (220 V DC)
	1250 VA (250 V AC)
Error detection (line break / short-circuit)	no

General

No. of channels	8
Mechanical service life	2×10^7 cycles
Operating mode	100% operating factor
Mounting position	any
Assembly instructions	In rows with zero spacing
Color	gray

Connection data for connection 1

Connection name	Controller level
Connection method	IDC/FLK pin strip
Number of connections	1
Number of positions	14
Pitch	2.54 mm

Connection data for connection 2

Connection name	Field level
Connection method	Push-in connection

Active module - VIP-8RPT-24DC/21/DO/FU/PLC - 2903601

Technical data

Connection data for connection 2

Stripping length	8 mm
Conductor cross section solid	0.14 mm ² ... 2.5 mm ²
Conductor cross section flexible	0.14 mm ² ... 2.5 mm ²
Conductor cross section AWG	26 ... 14

Supported controller

Corresponding control	ABB S800 I/O
Corresponding I/O card	DO810
	DO840
Corresponding control	ALLEN-BRADLEY ControlLogix
Corresponding I/O card	1756-OB32
	1756-OB16E
Corresponding control	ALLEN-BRADLEY PLC 5
Corresponding I/O card	1771 OBN
Corresponding control	ALLEN-BRADLEY SLC 500
Corresponding I/O card	1746 OB16
	1746 OB 32
Corresponding control	Emerson DeltaV
Corresponding I/O card	VE4002S1T1B3
	VE4002S1T2B3
	VE4002S1T2B3 Series 2
	VE4002S1T2B6
Corresponding control	GE-FANUC 90-30
Corresponding I/O card	IC693 MDL732
	IC693 MDL740
	IC693 MDL742
Corresponding control	GE-FANUC RX3i
Corresponding I/O card	IC694MDL754
Corresponding control	HONEYWELL Experion PKS C200
Corresponding I/O card	TC-ODD 321
Corresponding control	MITSUBISHI MELSEC L
Corresponding I/O card	LY41PT1P
	LY42PT1P
Corresponding control	MITSUBISHI MELSEC Q
Corresponding I/O card	QY81P
	QY82P
Corresponding control	SIEMENS S7-300 / ET 200 M
Corresponding I/O card	CPU 313C-2DP
	CPU 314C-2DP
	CPU 314C-2PtP
	6ES7 322-1BH01-0AA0

Active module - VIP-8RPT-24DC/21/DO/FU/PLC - 2903601

Technical data

Supported controller


	6ES7 322-1BL00-0AA0
	6ES7 323-1BH01-0AA0
	6ES7 323-1BL00-0AA0
	CPU 313C
	CPU 313C-2PtP
Corresponding control	SIEMENS S7-400
Corresponding I/O card	6ES7 422-1BL00-0AA0
	6ES7 422-7BL00-0AB0

Standards and Regulations


Connection in acc. with standard	CSA
Standards/regulations	DIN EN 50178

Drawings

Diagram

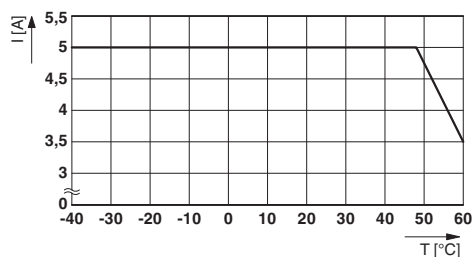

Circuit diagram

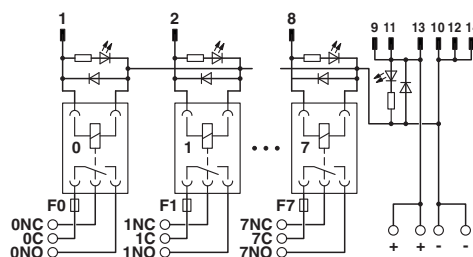

Approvals

Approvals

Approvals

CSA / UL Recognized / cUL Recognized / EAC / cULus Recognized

Ex Approvals


Approval details


CSA		http://www.csagroup.org/services/testing-and-certification/certified-product-listing/	2122203
mm ² /AWG/kcmil		26-16	
Nominal current I _N		5 A	


Active module - VIP-8RPT-24DC/21/DO/FU/PLC - 2903601

Approvals

Nominal voltage UN	240 V
--------------------	-------

UL Recognized		http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm	FILE E 238705
mm²/AWG/kcmil	26-14		
Nominal current IN	5 A		
Nominal voltage UN	250 V		

cUL Recognized		http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm	FILE E 238705
mm²/AWG/kcmil	26-14		
Nominal current IN	5 A		
Nominal voltage UN	250 V		

EAC		RU C- DE.A*30.B.01742
-----	---	--------------------------

cULus Recognized		http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm
------------------	---	---

Phoenix Contact 2017 © - all rights reserved
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
 Flachsmarktstr. 8
 32825 Blomberg
 Germany
 Tel. +49 5235 300
 Fax +49 5235 3 41200
<http://www.phoenixcontact.com>