



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



## Type 2 surge protection base element - VAL-MS-T1/T2 BE/O-FM - 2905652

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Base element for type 1/2 arresters from the VALVETRAB MS T1/T2 product range, with remote indication contact. Version: 1-channel

### Product Features

- ✓ Plug-in direction parallel to the conductor axis
- ✓ Versions with and without floating remote indication contact
- ✓ Rack-mount 2U panel applications
- ✓ Accepts Type 1 and Type 2 VAL-MS plugs.
- ✓ Coding when protective plug is inserted for the first time
- ✓ DIN rail mounting



### Key Commercial Data

Packing unit	1 pc
Weight per Piece (excluding packing)	1.0 g
Custom tariff number	85363030
Country of origin	United States

### Technical data

#### Dimensions

Height	77.1 mm
Width	17.6 mm
Depth	89.2 mm

#### Ambient conditions

Degree of protection	IP20
	IP20
Ambient temperature (operation)	-40 °C ... 80 °C
Altitude	max. 2000 m

# Type 2 surge protection base element - VAL-MS-T1/T2 BE/O-FM - 2905652

## Technical data

### Ambient conditions

Permissible humidity (operation)	5 % ... 95 %
Shock (operation)	25g
Vibration (operation)	5g

### General

Housing material	PBT
Flammability rating according to UL 94	V0
Color	black
Mounting type	DIN rail: 35 mm
Type	DIN rail module, two-section, divisible
Number of positions	1
Surge protection fault message	Remote indicator contact
	Remote indicator contact

### Protective circuit

IEC test classification	I / II
	T1 / T2
EN type	T1 / T2
Maximum continuous operating voltage $U_c$	600 V AC
	600 V AC
Nominal frequency $f_N$	50 Hz (60 Hz)
Rated load current $I_L$	80 A (with serial 16mm <sup>2</sup> through wiring)
	80 A (with serial 16mm <sup>2</sup> through wiring)
Max. backup fuse with branch wiring	160 A (gL/gG)
Max. backup fuse with V-type through wiring	80 A AC (gL/gG)
Short-circuit resistance $I_p$ with max. backup fuse (effective)	25 kA
Short-circuit current rating $I_{SCCR}$	25 kA

### Connection, protective circuit

Connection method	Biconnect terminal blocks
Connection type IN	Biconnect screw terminal block
Connection type OUT	Biconnect screw terminal block
Connection method	Biconnect terminal block
Screw thread	M5
Tightening torque	3 Nm ... 4.5 Nm (UL)
	27 lb <sub>F</sub> -in. ... 40 lb <sub>F</sub> -in. (UL)
Stripping length	16 mm
Conductor cross section flexible min.	1.5 mm <sup>2</sup>
Conductor cross section flexible max.	25 mm <sup>2</sup>

# Type 2 surge protection base element - VAL-MS-T1/T2 BE/O-FM - 2905652

## Technical data

### Connection, protective circuit

Conductor cross section solid min.	1.5 mm <sup>2</sup>
Conductor cross section solid max.	35 mm <sup>2</sup>
Conductor cross section AWG min.	15
Conductor cross section AWG max.	2
AWG conductor cross section	15 ... 2 (IEC)
	10 ... 2 (UL)

### Remote indicator contact

Connection name	Remote fault indicator contact
Switching function	PDT contact
Connection method	Screw connection
Screw thread	M2
Tightening torque	0.25 Nm
	0.25 Nm
	4 lb <sub>f</sub> -in. (UL)
Stripping length	7 mm
Conductor cross section flexible min.	0.14 mm <sup>2</sup>
Conductor cross section flexible max.	1.5 mm <sup>2</sup>
Conductor cross section solid min.	0.14 mm <sup>2</sup>
Conductor cross section solid max.	1.5 mm <sup>2</sup>
AWG conductor cross section	28 ... 16 (IEC)
	30 ... 14 (UL)

### Standards and Regulations

Standards/regulations	IEC 61643-1 2005
	EN 61643-11/A11 2007

## Classifications

### eCl@ss

eCl@ss 5.1	27130801
eCl@ss 6.0	27130802

### ETIM

ETIM 5.0	EC000472
----------	----------

## Approvals

### Approvals

# Type 2 surge protection base element - VAL-MS-T1/T2 BE/O-FM - 2905652

## Approvals


Approvals

UL Recognized / cUL Recognized / cULus Recognized

Ex Approvals


Approvals submitted

## Approval details



## Drawings

Dimensional drawing

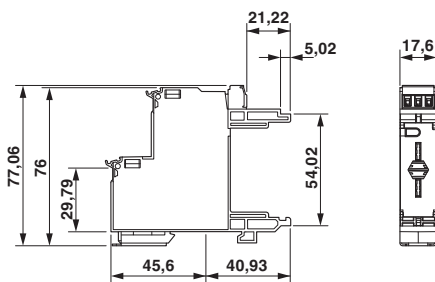

Circuit diagram

