



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



## Interface module - VIP-2/SC/D26F UHIO - 2905715

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)




VARIOFACE module with screw connection and female D-Subminiature Amplimate 0.050 series connector.

### Why buy this product

- Metal foot
- Screw connection
- Screw connection



### Key Commercial Data

|              |  |
|--------------|--|
| Packing unit | 1 STK  |
| GTIN         | <br>4 055626 000640 |
| GTIN         | 4055626000640  |

### Technical data

#### Dimensions

|        |         |
|--------|---------|
| Width  | 49.7 mm |
| Height | 65.5 mm |
| Depth  | 45.3 mm |

#### Ambient conditions

|   |                  |
|---|------------------|
| Ambient temperature (operation)         | -20 °C ... 60 °C |
| Ambient temperature (storage/transport) | -20 °C ... 70 °C |

#### General

|                                 |            |
|---------------------------------|------------|
| Max. perm. operating voltage    | 24 V AC/DC |
| Max. perm. current (per branch) | 500 mA     |
| Number of positions             | 26         |
| Status display                  | No         |
| Mounting position               | any        |

# Interface module - VIP-2/SC/D26F UHIO - 2905715

## Technical data

### Connection data for connection 1

|                                  |   |
|----------------------------------|---|
| Connection name                  | Field level                                 |
| Connection in acc. with standard | IEC / EN                                    |
| Connection method                | Screw connection                            |
| Stripping length                 | 8 mm  |
| Screw thread                     | M 3   |
| Conductor cross section solid    | 0.2 mm <sup>2</sup> ... 4 mm <sup>2</sup>   |
| Conductor cross section flexible | 0.2 mm <sup>2</sup> ... 2.5 mm <sup>2</sup> |
| Conductor cross section AWG      | 24 ... 12                                   |

### Connection data for connection 2


|                       |                    |
|-----------------------|--------------------|
| Connection name       | Controller level   |
| Connection method     | D-SUB socket strip |
| Number of connections | 1                  |
| Number of positions   | 26                 |

### Environmental Product Compliance

|            |   |
|------------|---|
| REACH SVHC | Lead 7439-92-1  |
| China RoHS | Environmentally Friendly Use Period = 50  |
|            | For details about hazardous substances go to tab "Downloads", Category "Manufacturer's declaration" |

## Drawings

Circuit diagram

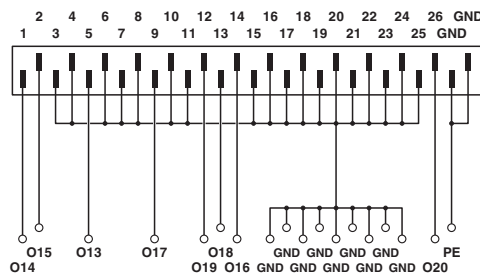

## Approvals

Approvals

---

Approvals

CSA

---


Ex Approvals

## Interface module - VIP-2/SC/D26F UHIO - 2905715

### Approvals

---

#### Approval details

|                            |   |   |         |
|----------------------------|---|---|---------|
| CSA                        |  | <a href="http://www.csagroup.org/services-industries/product-listing/">http://www.csagroup.org/services-industries/product-listing/</a> | 2122203 |
| Nominal voltage UN         |   | 30 V  |         |
| Nominal current IN         |   | 0.5 A   |         |
| mm <sup>2</sup> /AWG/kcmil |   | 28-12   |         |

---

Phoenix Contact 2018 © - all rights reserved  
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG  
Flachsmarktstr. 8  
32825 Blomberg  
Germany  
Tel. +49 5235 300  
Fax +49 5235 3 41200  
<http://www.phoenixcontact.com>