



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



Passive module - VIP-3/SC/FLK50/AN/2P/S7-1500 - 2908497

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)




VARIOFACE COMPACT LINE interface module for Siemens S7-1500 systems with S7-1500 specific labeling, with screw connection, external power distribution connections, module width: 128.2 mm

Why buy this product

- Single 50-pin FLK header
- Three-level, screw terminal field connections
- Printed channel markings
- External power distribution connections



Key Commercial Data

Packing unit	1 STK
GTIN	 4 055626 363509
GTIN	4055626363509

Technical data

Dimensions

Width	128.2 mm
Height	68.8 mm
Depth	60.7 mm

Ambient conditions

Ambient temperature (operation)	-20 °C ... 60 °C
Ambient temperature (storage/transport)	-20 °C ... 70 °C

General

Max. perm. operating voltage	60 V AC/DC
Max. perm. current (per branch)	1 A
Max. permissible current (separate power supply)	7 A
Number of positions	50

Passive module - VIP-3/SC/FLK50/AN/2P/S7-1500 - 2908497

Technical data

General

Status display	No
Mounting position	any

Connection data for connection 1

Connection name	Field level
Connection method	Screw connection
Stripping length	8 mm
Screw thread	M 3
Conductor cross section solid	0.2 mm ² ... 4 mm ²
Conductor cross section flexible	0.2 mm ² ... 2.5 mm ²
Conductor cross section AWG	24 ... 12

Connection data for connection 2

Connection name	Controller level
Connection method	IDC/FLK pin strip
Number of connections	1
Number of positions	50
Pitch	2.54 mm

Supported controller

Controller	SIEMENS S7-1500
- suitable I/O card	6ES7 531-7KF00-0AB0
	6ES7 531-7NF00-0AB0
	6ES7 531-7NF10-0AB0
	6ES7 531-7PF00-0AB0
	6ES7 532-5HF00-0AB0

Standards and Regulations

Standards/regulations	IEC 60664
	DIN EN 50178


Environmental Product Compliance

REACH SVHC	Lead 7439-92-1
China RoHS	Environmentally Friendly Use Period = 50
	For details about hazardous substances go to tab "Downloads", Category "Manufacturer's declaration"


Drawings

Passive module - VIP-3/SC/FLK50/AN/2P/S7-1500 - 2908497

Dimensional drawing

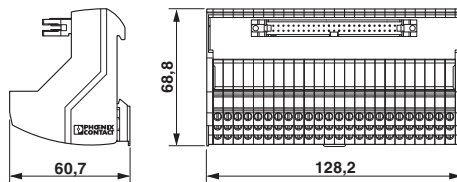

Circuit diagram

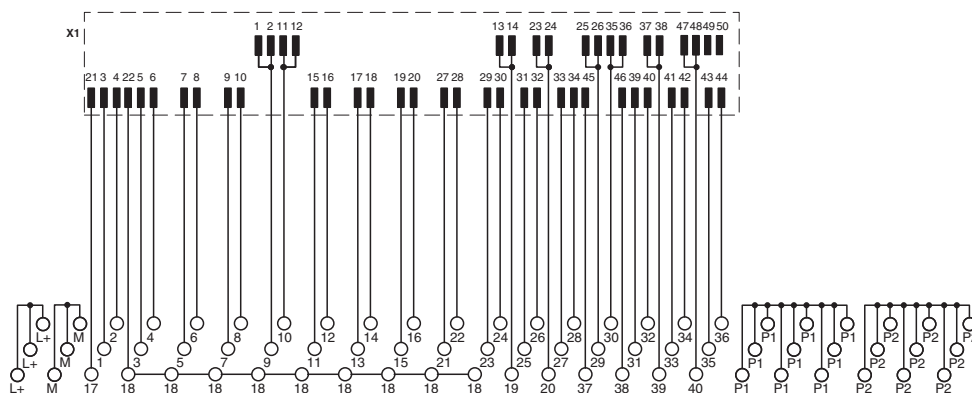

Approvals

Approvals

Approvals

CSA / UL Recognized / cUL Recognized / CSAus / cCSAus


Ex Approvals


Approval details


CSA		http://www.csagroup.org/services-industries/product-listing/	2122203
Nominal voltage UN	60 V		
Nominal current IN	7 A		
mm ² /AWG/kcmil	30-12		

Passive module - VIP-3/SC/FLK50/AN/2P/S7-1500 - 2908497

Approvals

UL Recognized		http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm	FILE E 238705
Nominal voltage UN		60 V	
Nominal current IN		7 A	
mm ² /AWG/kcmil		30-12	

cUL Recognized		http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm	FILE E 238705
Nominal voltage UN		60 V	
Nominal current IN		7 A	
mm ² /AWG/kcmil		30-12	

CSAus		http://www.csagroup.org/services-industries/product-listing/	2122203
Nominal voltage UN		60 V	
Nominal current IN		7 A	
mm ² /AWG/kcmil		30-12	

cCSAus			
--------	---	--	--

Phoenix Contact 2018 © - all rights reserved
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
 Flachsmarktstr. 8
 32825 Blomberg
 Germany
 Tel. +49 5235 300
 Fax +49 5235 3 41200
<http://www.phoenixcontact.com>