



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832


Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



REL-MR-G 24/1

Order No.: 2961037

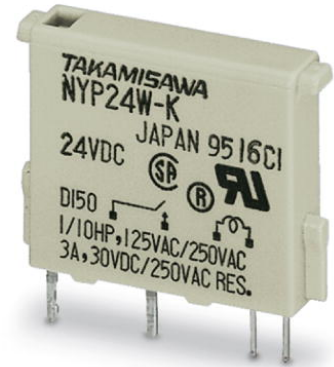

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2961037>

Pluggable replacement miniature relay, 1 N/O contact, input voltage 24 V DC

Commercial data

GTIN (EAN)	 4 017918 087074
Note	Made-to-order
sales group	G080
Pack	8 pcs.
Customs tariff	85364190
Catalog page information	Page 246 (IF-2009)

Product notes

WEEE/RoHS-compliant since:
07/25/2006



<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data

Coil side

Nominal input voltage U_N	24 V DC
Input voltage range in reference to U_N	0.8 ... 1.1
Nominal input current at U_{IN}	5 mA
Typical response time	5 ms

Typical release time	2 ms
Coil resistance	4800 $\Omega \pm 10\%$

Contact side

Contact type	Double contact, 1 N/O contact
Contact material	AgNi 90/10, + 5 μm hard gold-plated
Maximum switching voltage	250 V AC
	125 V DC
Minimum switching voltage	5 V DC
Maximum inrush current	5 A
Min. switching current	1 mA
Limiting continuous current	3 A
Interrupting rating (ohmic load) max.	72 W (at 24 V DC)
	60 W (for 48 V DC)
	50 W (for 60 V DC)
	50 W (for 110 V DC)
	750 VA (for 230 V AC)

General data

Width	5 mm
Height	23 mm
Depth	17 mm
Test voltage relay winding/relay contact	2 kV AC (50 Hz, 1 min.)
Ambient temperature (operation)	-40 °C ... 85 °C
Ambient temperature (storage/transport)	-40 °C ... 85 °C
Operating mode	100% operating factor
Mechanical service life	Approx. 2×10^7 cycles
Standards/regulations	DIN VDE 0110
	IEC 255/DIN VDE 0435 (in relevant parts)
Mounting position	Any

Certificates / Approvals




Certification

GOST

Diagrams/Drawings

Circuit diagram

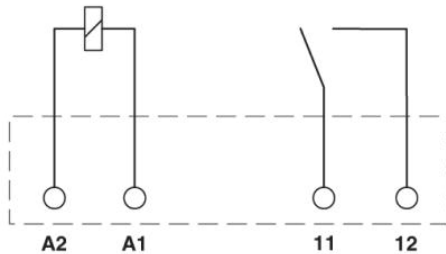

Schematic diagram



Address

PHOENIX CONTACT Deutschland GmbH
Flachsmarktstr. 8
32825 Blomberg, Germany
Phone +49 5235 3 12000
Fax +49 5235 3 41200
<http://www.phoenixcontact.de>



© 2011 Phoenix Contact
Technical modifications reserved;