



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com


Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



**Model 2970
Triple Banana Plug**



**Model 2970
Triple Banana Plug**

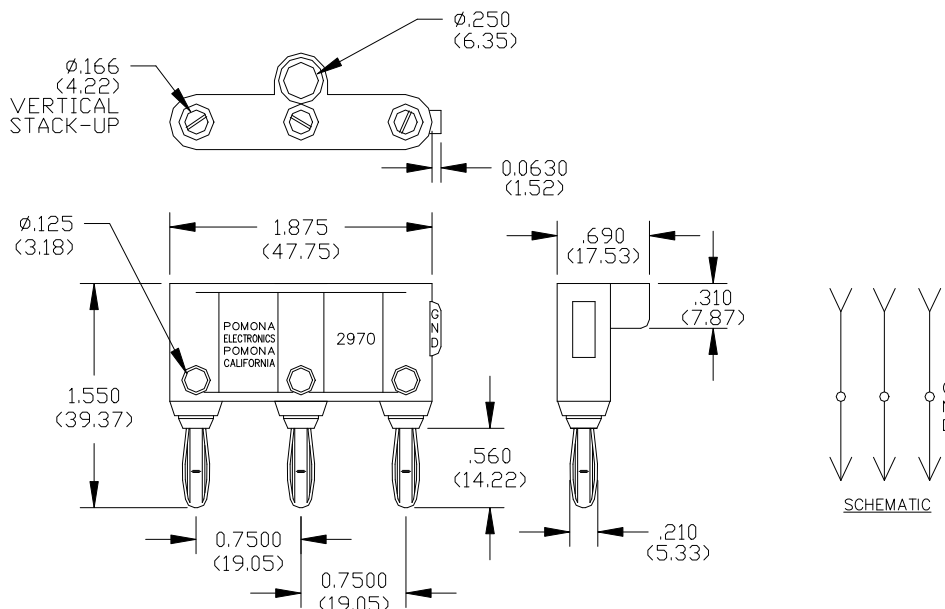

Features

- Set screws secure leads.
- Ideal for balanced line 2 conductor shielded cable assemblies.

Materials

Banana Jacks:

Material: Brass per QQ-B-626, Alloy 360, 1/2 Hard.
Finish: Nickel plate per QQ-N-290, Class 2, (.0002/.0003).

Banana Plugs:

Body: Brass per QQ-B-626, Alloy 360, 1/2 Hard.
Spring: Beryllium Copper per QQ-C-533, Alloy 172, Cond. H.T.
Finish: Nickel plate per QQ-N-290, Class 2, (.0002/.0003).

Insulation:

Material: Polypropylene molded to Banana Jack and Banana Plug bodies.

Marking: "POMONA ELECTRONICS, POMONA CALIF., 2970"

Cross holes: 3.18mm (.125") dia. With #8-32 slotted set screw to secure lead wires.

Specifications

Operating Voltage:

Hands free usage in controlled voltage environments: 5000 Vrms maximum.

For CE compliance: not intended for hand-held use at voltages above 33 Vrms/70 Vdc.

Operating Temperature: +50°C (+122°F) Max.

Current: 15 Amperes

Ordering Information

Model: 2970-*

*=Color, -0 (Black), -2 (Red)

Ordering Example: 2970-2 (Triple Banana Plug with Red insulation)

USA: Sales: 800-490-2361
Technical Support: technicalsupport@pomonatest.com
Fax: 425-446-5844

Europe: 31-(0) 40 2675 150 **International:** 425-446-5500

Where to Buy: www.pomonaelectronics.com

All dimensions are in inches. Tolerances (except noted): .xx = ±.02" (.51 mm), .xxx = ±.005" (.127 mm). All specifications are to the latest revisions. Specifications are subject to change without notice. Registered trademarks are the property of their respective companies.