



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832


Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



UMK- 8 RM/KSR-G 24/21/PLC


Order No.: 2979485

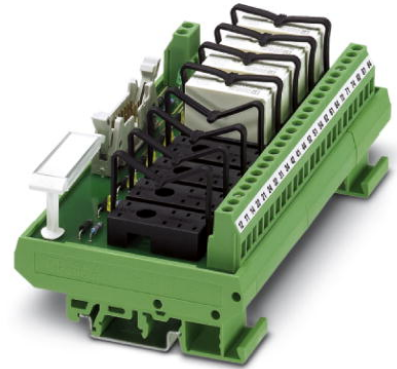

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2979485>


VARIOFACE output module, with 8 miniature relays, 1 PDT each, plugged, for 24 V DC (including relays)



Commercial data	
GTIN (EAN)	 4 017918 130350
sales group	I640
Pack	1 pcs.
Customs tariff	85364190
Catalog page information	Page 250 (IF-2009)

Product notes

WEEE/RoHS-compliant since:
08/24/2006



<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data	
Input data	
Nominal input voltage U_N	24 V DC $\pm 10\%$
Input voltage range in reference to U_N	0.8 ... 1.1
Typical input current at U_N	23 mA
Typical response time	9 ms

Typical release time	10 ms
Type of protection	Free-wheeling diode
Protective circuit/component	Damping diode
Operating voltage display	Green LED
Status display/channel	Yellow LED

Output data

Contact type	1 PDT
Contact material	AgCdO
Maximum switching voltage	250 V AC/DC
Limiting continuous current	5 A
Maximum inrush current	6 A
Interrupting rating (ohmic load) max.	120 W (24 V DC, $\tau = 0$ ms)
	60 W (48 V DC, $\tau = 0$ ms)
	50 W (60 V, $t = 0$ ms)
	50 W (110 V DC, $\tau = 0$ ms)
	65 W (220 V DC, $\tau = 0$ ms)
	1250 VA (250 V AC, $\tau = 0$ ms)

General data

No. of channels	8
Compatible components	Miniature relay, REL-MR- 24DC/21HC
With components	Yes
Width	135 mm
Height	90 mm
Depth	68 mm
Ambient temperature (operation)	-20 °C ... 50 °C
Ambient temperature (storage/transport)	-20 °C ... 70 °C
Test voltage	2.5 kV (50 Hz, 1 min.)
Test voltage input/output	2.5 kV AC
Mechanical service life	3×10^7 cycles
Standards/regulations	IEC 60664
	DIN EN 50178
	IEC 62103
Mounting position	Any
Assembly instructions	In rows with zero spacing

Housing insulation material	PVC
Color	green

Connection data

Connection 1	Coil side
Type of connection	Flat-ribbon cable plug connector in acc. with IEC 60603-13
Number of positions	14
Connection 2	Contact side
Type of connection	Screw connection
Conductor cross section solid min.	0.2 mm ²
Conductor cross section solid max.	4 mm ²
Conductor cross section stranded min.	0.2 mm ²
Conductor cross section stranded max.	2.5 mm ²
Conductor cross section AWG/kcmil min.	24
Conductor cross section AWG/kcmil max	12
Screw thread	M3
Stripping length	8 mm

Certificates / Approvals




Certification

CUL Listed, UL Listed

Diagrams/Drawings

Circuit diagram

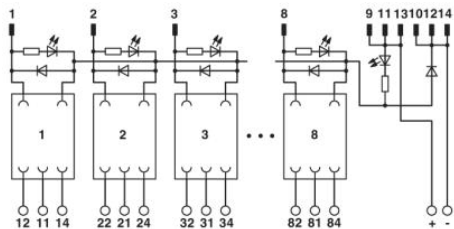

Address

PHOENIX CONTACT Deutschland GmbH
Flachmarktstr. 8
32825 Blomberg, Germany
Phone +49 5235 3 12000
Fax +49 5235 3 41200
<http://www.phoenixcontact.de>



© 2011 Phoenix Contact
Technical modifications reserved;