



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832


Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China




# DUAL-IN-LINE SOCKETS

## SERIES 299 • RIGHT ANGLE MOUNT • CLOSED FRAME

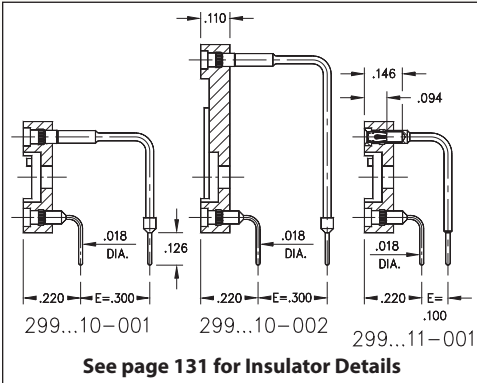

- Ideal for mounting components, such as LED displays, where the face must be parallel to the PCB surface
- Sockets have solder tail termination and are available with either .300" (standard) or .100" row spacing
- Series 299 uses MM #1103/0903, #1103/1610 or #1103/0904 pins. See pages 166 & 167 for details
- Hi-Rel, 4-finger BeCu #30 contact is rated at 3 amps. See page 253 for details
- Insulators are high temperature thermoplastic, suitable for all soldering operations
- For Electrical, Mechanical and Environmental Data, see page 264 for details

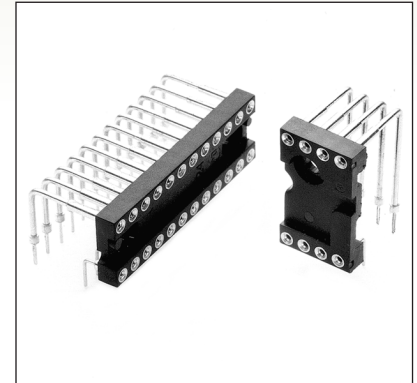

Total number of pins				Quantity per tube	ORDERING INFORMATION	
	A	B	C		E = .100	E = .300
6	0.3	0.3	0.4		299-XX-306-11-001000	* 299-XX-306-10-001000
8	0.4	0.3	0.4		299-XX-308-11-001000	* 299-XX-308-10-001000
10	0.5	0.3	0.4		299-XX-310-11-001000	* 299-XX-310-10-001000
12	0.6	0.3	0.4	33	299-XX-312-11-001000	* 299-XX-312-10-001000
14	0.7	0.3	0.4	29	299-XX-314-11-001000	* 299-XX-314-10-001000
16	0.8	0.3	0.4	25	299-XX-316-11-001000	* 299-XX-316-10-001000
18	0.9	0.3	0.4	22	299-XX-318-11-001000	* 299-XX-318-10-001000
20	1.0	0.3	0.4	20	299-XX-320-11-001000	* 299-XX-320-10-001000
24	1.2	0.3	0.4	16	299-XX-324-11-001000	* 299-XX-324-10-001000
8	0.4	0.6	0.7	50		299-XX-608-10-002000
10	0.5	0.6	0.7	40		299-XX-610-10-002000
12	0.6	0.6	0.7	34		299-XX-612-10-002000
14	0.7	0.6	0.7	28		299-XX-614-10-002000
16	0.8	0.6	0.7	25		299-XX-616-10-002000
18	0.9	0.6	0.7	22		299-XX-618-10-002000
20	1.0	0.6	0.7	20		299-XX-620-10-002000
22	1.1	0.6	0.7	18		299-XX-622-10-002000
24	1.2	0.6	0.7	16		299-XX-624-10-002000
26	1.3	0.6	0.7	15		299-XX-626-10-002000
28	1.4	0.6	0.7	14		299-XX-628-10-002000
30	1.5	0.6	0.7	13		299-XX-630-10-002000
32	1.6	0.6	0.7	12		299-XX-632-10-002000
36	1.8	0.6	0.7	11		299-XX-636-10-002000
40	2.0	0.6	0.7	10		299-XX-640-10-002000
SPECIFY PLATING CODE XX =					93	43
Sleeve (Pin)					200 μ" Sn/Pb	200 μ" Sn
Contact (Clip)					30 μ" Au	30 μ" Au



XX=Plating Code  
See Below

\* Not available in tubes