



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us


Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



## Model 2BC-MG Double Banana Plug to Minigator Test Clip Breakouts

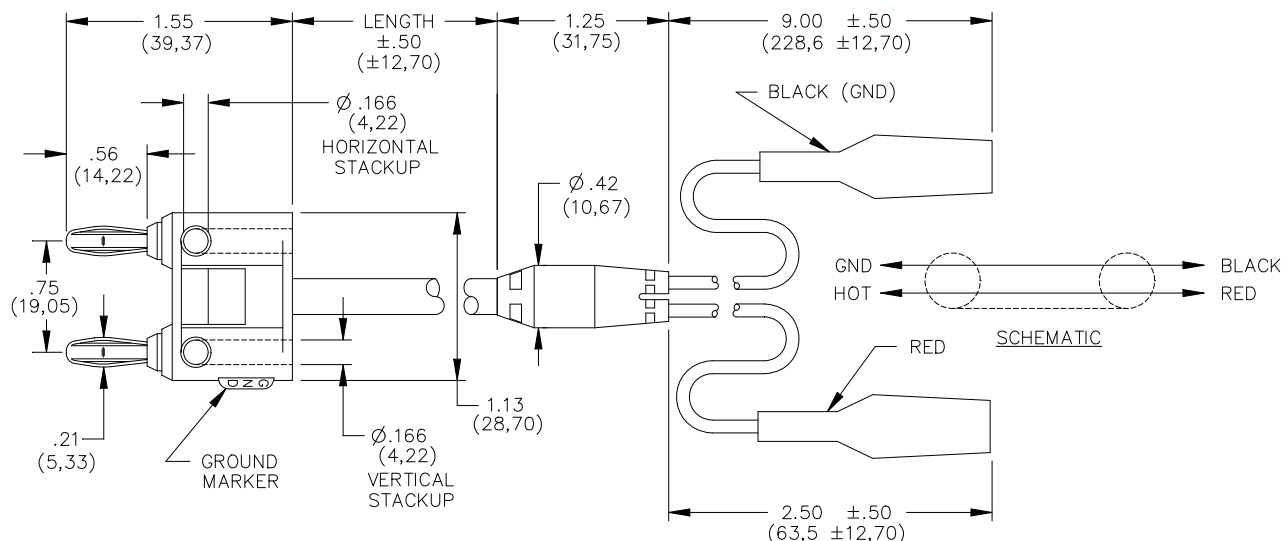

### Features

- Jaws open to .187" Max.
- Ideal for use with Pomona Model 2269 or any standard double Banana Jack.
- Allows connection from a Double Banana Binding Post to Alligator Clips.

### Materials

#### Double Banana Plug:

Spring: Nickel plated Beryllium Copper.

Body: Nickel plated brass Alloy 360 ½ hard.

Insulator: Polypropylene, color matches cable

Cable: RG 58C/U

Breakout: Molded PVC, color matches cable

Breakout Leads: 20 AWG. 41 x 36 T.C. PVC insulated .087 inch O.D., Color: one Black, one Red

Miniature Alligator Clips: Plated steel, vinyl insulator, color matches wire

### Ratings

Operating Voltage: 45 VRMS

Operating Temperature: +50°C (+122°F) Max.

Cable Capacitance: 30.8 pf/ft

Cable Impedance: 50 Ohms nominal

### Ordering Information

Model: 2BC-MG-36

Standard cable length is 36" (914).

Additional lengths can be quoted upon request.

**USA:** Sales: 800-490-2361  
Technical Support: [technicalsupport@pomonatest.com](mailto:technicalsupport@pomonatest.com)  
Fax: 425-446-5844

**Europe:** 31-(0) 40 2675 150 **International:** 425-446-5500

**Where to Buy:** [www.pomonaelectronics.com](http://www.pomonaelectronics.com)

All dimensions are in inches. Tolerances (except noted): .xx = ±.02" (.51 mm), .xxx = ±.005" (.127 mm). All specifications are to the latest revisions. Specifications are subject to change without notice. Registered trademarks are the property of their respective companies.