



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com


Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION  
 © COPYRIGHT BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
CE	16	P	LTR	DESCRIPTION	DATE	DWN	APVD
		A		RELEASE PER NPR	25 OCT 05	CSV	JD

- 1 MAXIMUM CONNECTOR INSERTION LOSS IS 0.5 dB PLUS CABLE ATTENUATION OF 1.5dB/km AT 1300nm (SEE TABLE)
- 2 GEOMETRY REQUIREMENTS:  
RADIUS OF CURVATURE : 10-30 mm
- 3. PRODUCT AND PROCESSING MUST MEET REQUIREMENTS OF TYCO ELECTRONICS STANDARD 230-702

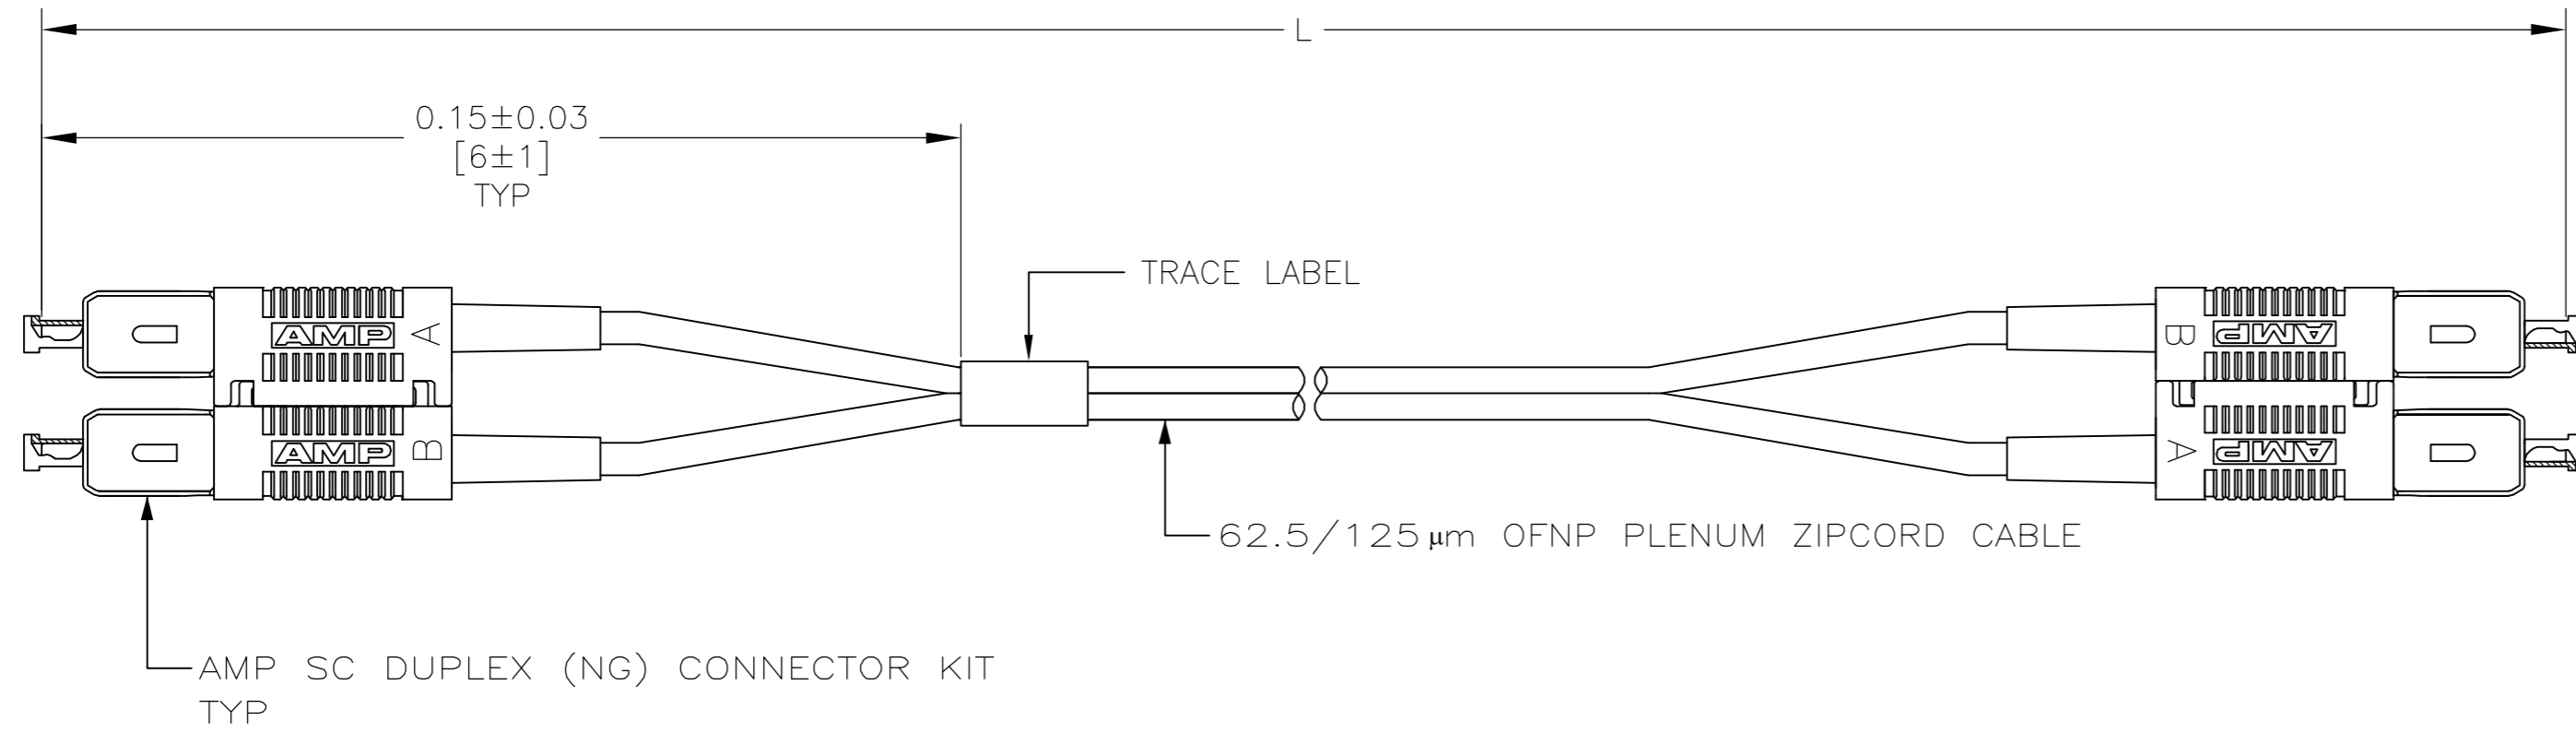

0.65	100.00±1.00	[3937.0±39.0]	9-6374039-9
0.57	50.00±0.50	[1969.0±20.0]	5-6374039-0
0.54	30.00±0.30	[1181.0±12.0]	3-6374039-0
0.53	20.00±0.30	[590.6±12.0]	2-6374039-0
0.52	14.00±0.15	[551.2±6.0]	1-674039-6
0.52	15.00±0.15	[590.6±6.0]	1-6374039-5
0.51	12.00±0.15	[472.4±6.0]	1-6374039-4
0.51	11.00±0.15	[433.1±6.0]	1-6374039-3
0.51	7.00±0.08	[275.6±3.0]	1-6374039-2
0.52	16.45±0.30	[648.0±12.0]	1-6374039-1
0.51	10.00±0.15	[394.0±6.0]	1-6374039-0
0.52	13.41±0.15	[528.0±6.0]	6374039-9
0.51	12.19±0.15	[480.0±6.0]	6374039-8
0.51	9.75±0.15	[384.0±6.0]	6374039-7
0.50	4.57±0.08	[180.0±3.0]	6374039-6
0.51	5.00±0.08	[197.0±3.0]	6374039-5
0.50	3.00±0.05	[118.0±2.0]	6374039-3
0.50	2.00±0.05	[79.0±2.0]	6374039-2
0.50	1.00±0.05	[39.0±2.0]	6374039-1

1 MAX IL (dB)	L	PART NUMBER
---------------	---	-------------

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	25 OCT 05	Tyco Electronics Corporation Harrisburg, Pa 17105-3608	
DIMENSIONS: METERS [INCHES]		CHK	25 OCT 05	NAME	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		J.DUNCAN		CABLE ASSEMBLY, FIBER OPTIC, 62.5/125µm PLENUM ZIP, AMP SC DUPLEX FIBER CHANNEL, OPTIMATE	
0 PLC ± -		APVD		SIZE	
1 PLC ± -		25 OCT 05		CAGE CODE	
2 PLC ± -		J.DUNCAN		DRAWING NO	
3 PLC ± -		PRODUCT SPEC		RESTRICTED TO	
4 PLC ± -		APPLICATION SPEC		A2 00779 C=6374039	
ANGLES ± -		WEIGHT		SCALE	
FINISH		-		NTS	
MATERIAL		-		SHEET 1 OF 1	
-		CUSTOMER DRAWING		REV A	