



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us


Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



Wire cross section:

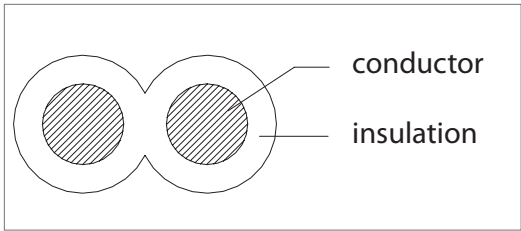

marking:
 E339579  AWM STYLE 2468 24AWG 80°C 300V
 VW-1 --- C  AWM I A 80°C 300V FT1 TENSILITY

Cable specifications:

conductors

gauge (AWG)	24
material	bare copper
cord size (strands)	11 x 0.16

jacket

material	80°C, 48P, PVC
color	black
diameter (mm)	3.6 ± 0.10

electrical properties

rated voltage (V)	300
rated temperature (°C)	80
insulator resistance (Ohm/Kft)	2.5
operating temperature (°C)	-5 ~ +80
resistance at 20° C (Ohm/Km) max	87.5
spark test (Kv)	3.0/4.0

physical characteristics

material		insulation
unaged	tensile strength (kgf/mm ² min)	1.05
	elongation (% min)	100
aging test	condition	113 °C/168 h
	elongation (% unaged min)	65
	tensile strength (% unaged min)	70
cold bend (-10 ± 1° C, 1 hour)		no observed cracking
heat shock (121 ± 1° C, 1 hour)		no distortion
deformation (121 ± 1° C x 1 hour)		≤50%
flammability rating		VW-1

tolerance X: ±0.5 mm .X: ±0.3 mm .XX: ±0.05 mm
 applicable unless otherwise indicated in specification or on drawings

Initial	Date
----------------	-------------

Revision notes:

Rev	Date	Description
A	April 19, 2010	initial release
A1	September 28, 2011	added marking and updated description
A2	August 13, 2012	added operating temperature

Specification Approval

Spec sign-off verifies that you have reviewed the entire specification, tested a sample of the product, and confirm that it meets your requirements. This specification reflects the part as it will be ordered. Orders will not be processed until the specification pages have been initialed and the approval page has been signed. This specification is confidential and is not to be transmitted without prior approval from Tensility.

Signature _____

Title _____

Name _____

Date _____

Company _____

Branch _____