



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



Ratings

Voltage: 150 V
 Temperature: 80° C
 Flammability: VW-1

Conductor

Conductor count: 4
 Gauge: 0.034 mm²
 Material: tinned copper strands
 Strand size: Ø 0.08 mm x 7

Insulator

Material: LD-PE
 Color: white, black, red, yellow
 Diameter: 0.55 ±0.05 mm
 Nominal thickness: 0.15 mm

Filler

Material: nylon 500D

Shield



Type: spiral
 Material: tinned copper strands
 Stranding: Ø0.127 x 36
 Coverage: 85% minimum

Outer jacket

Material: soft PVC
 Color: white
 Diameter: 2.0 ±0.15 mm
 Nominal thickness: 0.25 mm

Wire marking: none

Use: Internal wiring or external interconnection of electronic equipment.

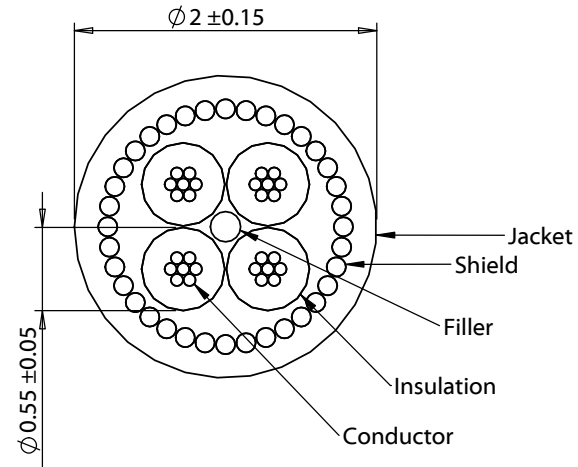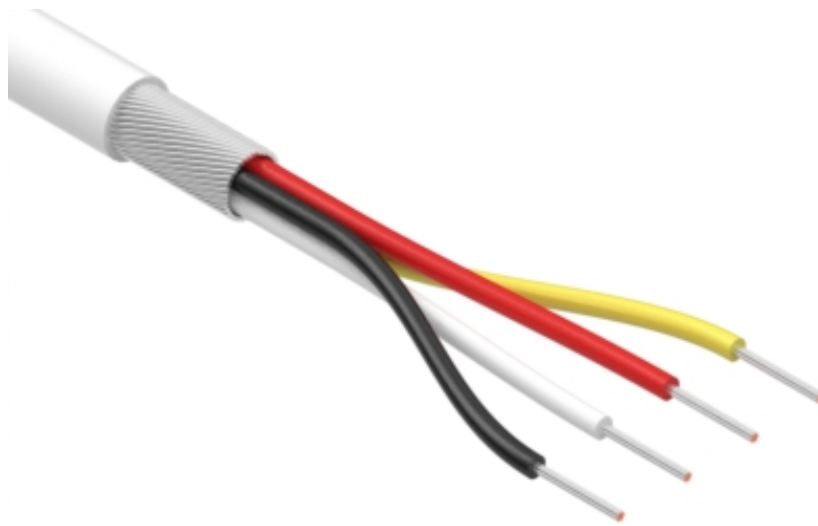

Revision:	Date:	Description:	Prepared:	Notes:	<h1>TENSILITY</h1> tel 1.541.323.3228 800 877.670.7118 fax 1.541.323.4202 web tensility.com
A	1/29/2013	Initial release	GL 2016.07.08 13:36:34 -07'00'		
A1	6/7/2013	Updated spec format	Verified:	Function test: no open, no short circuit, no intermittent	Size: Part number: A 30-00218
A2	7/6/2016	Corrected conductor stranding	AG 2016.07.11 11:10:52 -07'00'		
			Dimensions are in millimeters. Tolerances: X: ± 0.5 mm X.X: ± 0.3 mm X.XX: ± 0.05 mm	Description: Wire, 4C, 32 AWG, 150V, 80C, 2.0 mm, spiral shield, VW-1, PVC, 66A, white	Scale: 10:1
					Sheet 1 of 1