



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



**Ratings**

Voltage: 300 V  
 Temperature: 80 °C

**Conductor**

Gauge: 20 AWG  
 Material: tinned copper strands  
 Strand size: Ø 0.16 mm  
 Strand count: 26

**Insulator**

Material: PVC, 80 °C  
 Color: black, white  
 Nominal thickness: 0.23 mm  
 Outer diameter: 1.55 mm



**Outer jacket**

Material: PVC, 80 °C  
 Color: white  
 Thickness: 0.76 mm  
 Diameter: 4.7 ±0.15 mm  
 Durometer: 91 Shore A

**Wire marking:** E339579 AWM STYLE 2464 20AWG 80°C 300V VW-1 --- C AWM I A 80°C 300V FT1 LF TENSILITY HLE

**Tests**

Voltage test: 300 V  
 Spark test: 3.0 kV  
 Max resistance at 20 °C: 36.7 ohm/km  
 Insulation tensile strength: 2.11 kgf/mm<sup>2</sup>  
 Jacket tensile strength: 1.05 kgf/mm<sup>2</sup>  
 After aging at 113 ±2 °C for 7 days:  
     Minimum tensile strength 70 % original  
     Minimum elongation 65 % original  
 Heat shock: 121 ±1 °C /1 hour, no observed degradation  
 Deformation: 121 ±1 °C /1 hour, ≤ 50 %  
 Cold bend: -10 ±1 °C /1 hour, no observed cracking  
 Flammability: VW-1  
 Dielectric test: 2000 V ac for 1 minute without breakdown

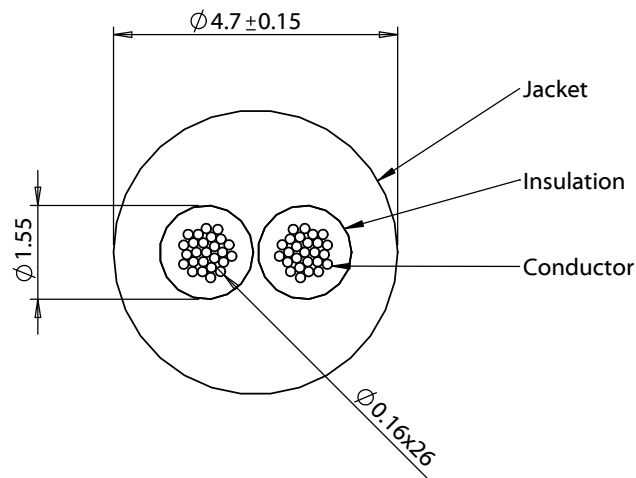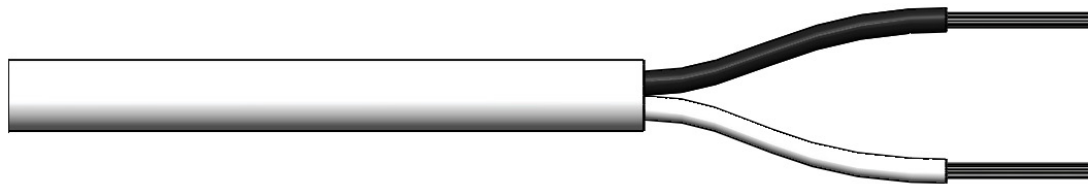

REVISION	DATE	DESCRIPTION
A	06/24/2014	Initial release

**PREPARED:**  
 AG  
 2014.06.24 15:33:02 -07'00'

**VERIFIED:**  
 JM  
 2014.06.25 08:11:11 -07'00'

**DIMENSIONS ARE IN MILLIMETERS**

**TOLERANCES:**  
 X: ± 0.5 mm  
 X.X: ± 0.3 mm  
 X.XX: ± 0.05 mm

**NOTES:**  
 RoHS and REACH compliant

Electrical test: no open, no short circuit, no intermittent

**DESCRIPTION:**  
 Wire, 2C TS, 20 AWG, UL2464, 300V, 80C, 4.7 mm, VW-1, PVC, 91A, white

**TENSILITY**

20802 Sockeye Place #130  
 Bend, OR 97701 USA  
 tel 541.323.3228 fax 541.323.4202  
 800 877.670.7118 www.tensility.com

<b>SIZE</b> A	<b>PART NUMBER</b> <b>30-00354</b>
SCALE: 8:1	WEIGHT:
SHEET 1 OF 1	