

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China







Ratings

Voltage: 300 V

Temperature: -10 ~ 80 °C

Conductor

Gauge: 20 AWG, 0.52 mm² Material: tinned copper strands Strand size: Ø 0.16 mm

Strand count: 26

Outer jacket

Material: PVC, 80 °C Color: black and red Thickness: 0.38 mm

Diameter: 4.0 ±0.20 mm (2.0 x 4.0)

Wire marking: E339579 NA AWM STYLE 2468 20AWG 80°C 300V VW-1 --- C N AWM I A 80°C 300V FT1 TENSILITY

Tests

Voltage test: 300 V

Max resistance at 20 °C: 36.7 ohm/km


Spark test: 3.0/4.0 kV


Tensile strength: 1.05 kgf/mm²
After aging at 113 ±2 °C for 7 days:
Minimum tensile strength 70 % original
Minimum elongation 65 % original

Heat shock: 121 ± 1 °C /1 hour, no observed degradation Deformation: 121 ± 1 °C /1 hour, ≤ 50 % Cold bend: -10 ± 1 °C /1 hour, no observed cracking

Flammability: VW-1

Dielectric test: 1500 Vac for 1 minute without breakdown

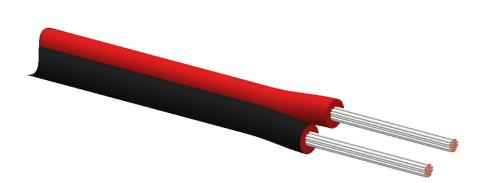

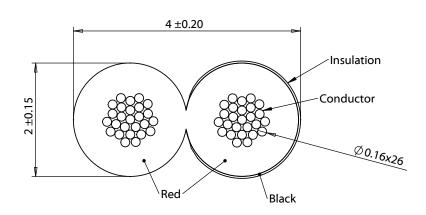

| REVISION A | DATE 7/21/2014 | DESCRIPTION Initial release | PREPARED: AG 2015.09.08 15:31:04-07'00' | NOTES: RoHS and REACH compliant | 1 | 20802 Sockeye Place #130 Bend, OR 97701 USA tel 541.323.3228 fax 541.323.4202 | | | |
|---------------|----------------|-----------------------------|--|--|------|---|---------|--------------|--|
| A1 | 10/14/2014 | Updated jacket construction | VERIFIED: JM 2015.09.09 07:28:22-07'00' | Electrical test: no open, no short circuit, no intermittent | Ber | | | | |
| A2 | 9/8/2015 | Updated jacket tolerance | DIMENSIONS ARE IN | | | 800 877.670.7118 www.tensility.com | | | |
| | | | MILLIMETERS TOLERANCES: X: ± 0.5 mm X.X: ± 0.3 mm X.XX: ± 0.05 mm | DESCRIPTION: Wire, 2C TS, 20 AWG, UL2468, 300V, 80°C, 4.0 mm, VW-1, PVC, red and black | _ | SIZE PART NUMBER A 30-00416 | | | |
| | | | | | SCAL | E: 15:1 | WEIGHT: | SHEET 1 OF 1 | |

5 3