

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China







Ratings

Temperature: 0 ~ 70 °C Voltage: 150 V

Conductor

Gauge: 26 AWG, 0.13 mm<sup>2</sup> Material: tinned copper strands

Stranding:  $\emptyset$  0.08 x 26 Resistance at 20 °C: 150  $\Omega$ /km max

Insulator

Material: HDPE Color: black, white

Outer diameter:  $\emptyset$  0.9 ±0.10 mm Nominal thickness: 0.20 mm

Resistance at 20 °C: 1000 M $\Omega$ /km min

Shield

Type: spiral

Material: tinned copper strands Strand size: Ø 0.08 mm Coverage: 90 % minimum

Outer jacket

Material: TPU, 70 °C

Color: black

Nominal thickness: 0.50 mm Diameter:  $\emptyset$  3.1  $\pm$ 0.15 mm

Filler


Material: kevlar

Tests

Tensile strength: 35.7 kgf

Dielectric test: 1500 V dc for 1 minute without breakdown Bend test at 200 q,  $\pm 90^{\circ}$ , 30 cycles /min: 15,000 cycle

minimum

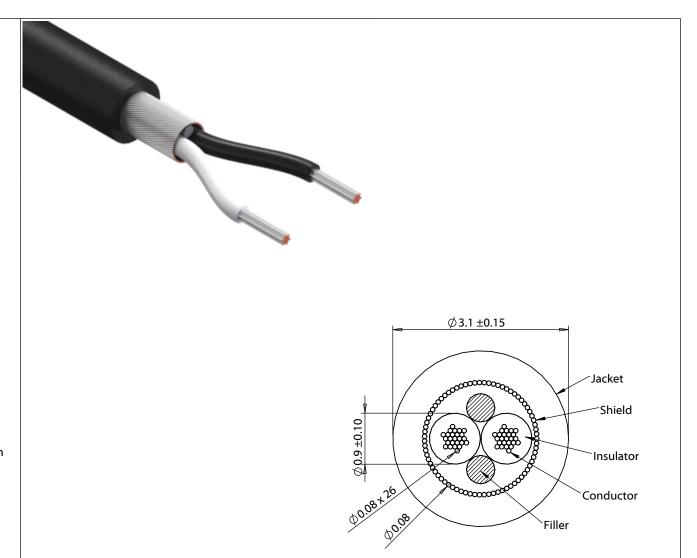

| REVISION | DATE                                    | DESCRIPTION                         | PREPARED:   | NOTES  | _   |  |  |              |  |
|----------|---|-------------------------------------|---|--|-----|--|--|--------------|--|
| Α        | 9/30/2015                               | Initial release                     | AG 2016.01.13<br>17:17:37<br>-08'00'  | RoHS and REACH compliant   |     | TENSILITY  20802 Sockeye Place #130 Bend, OR 97701 USA   |  |              |  |
| A1       | 1/13/2016                               | Updated notes, corrected tolerances | VERIFIED:   | Jacket meets ISO 10993 Biological Compatibility Phthalate and halogen free | 208 |  |  |              |  |
|          | .,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,, |                                     | ou-Englineering, simal-QM002@Tensilty.com, c-US Date: 2016.01.13 18:0028-08'00' | Function test: no open, no short, no intermittent                          | tel | tel 541.323.3228 fax 541.323.4202<br>800 877.670.7118 www.tensility.com  SIZE PART NUMBER A 30-00656 |  |              |  |
|          |   |                                     | DIMENSIONS ARE IN MILLIMETERS   | DESCRIPTION:   |     |  |  |              |  |
|          |   |                                     | TOLERANCES:<br>X: ± 0.5 mm  | Wire, 2C TS, 26 AWG, 150V, 70C, 3.1 mm, spiral shield, TPU                 |     |  |  |              |  |
|          |   |                                     | X.X: ± 0.3 mm<br>X.XX: ± 0.05 mm  |  |     | E: 1:1   |  | SHEET 1 OF 1 |  |

5 3