Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!

Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832
Email & Skype: info@chipsmall.com Web: www.chipsmall.com
Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China

Ratings
Temperature: 0 ~ 70 °C
Voltage: 150 V

Conductor
Gauge: 24 AWG, 0.20 mm²
Material: tinned copper strands
Strand size: Ø 0.08 mm
Strand count: 41
Resistance at 20 °C: 95 Ω/km max

Insulator
Material: PE
Color: black, white
Outer diameter: 1.0 ±0.10 mm
Resistance at 20 °C: 1000 MΩ/km min

Shield
Type: spiral
Material: tinned copper strands
Strand size: Ø 0.08 mm
Coverage: 90 % minimum

Outer jacket
Material: TPU, 70 °C
Durometer: 78 Shore A
Color: cool gray 1C
Nominal thickness: 0.50 mm
Diameter: 3.0 ±0.15 mm

Filler
Material: kevlar

Tests
Tensile strength: 35.7 kgf
Dielectric test: 1500 V dc for 1 minute without breakdown
Bend test at 200 g, ±90 °, 30 cycles /min: 15,000 cycle minimum

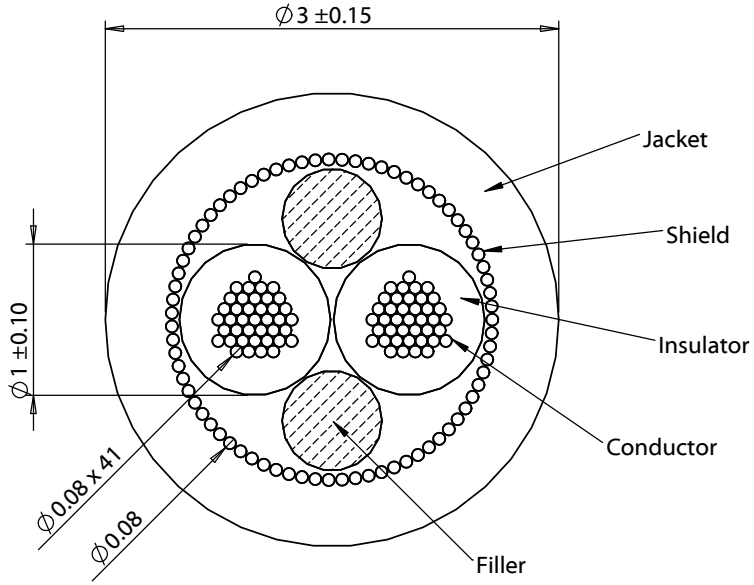

REVISION	9/24/2015	DESCRIPTION
A	9/30/2015	Initial release

PREPARED: AG 2015.09.30 15:29:45 -07'00'

VERIFIED: LA Digitally signed by LA DN: cn=LA, o=Tensility International Corporation, ou=specs, email=luis.alcala@tensility.com, c=US Date: 2015.10.05 17:30:32 -07'00'

DIMENSIONS ARE IN MILLIMETERS

TOLERANCES:
X: ± 0.5 mm
X.X: ± 0.3 mm
X.XX: ± 0.05 mm

NOTES
RoHS and REACH compliant

Jacket meets ISO 10993 Biological Compatibility

DESCRIPTION:
Wire, 2C TS, 24 AWG, 150V, 70C, 3.0 mm, spiral shield, TPU, white

TENSILITY
20802 Sockeye Place #130
Bend, OR 97701 USA
tel 541.323.3228 *fax* 541.323.4202
800 877.670.7118 www.tensility.com

SIZE	PART NUMBER
A	30-00660

SCALE: 1:1 | SHEET 1 OF 1

5 4 3 2 1