# mail

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



# Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832 Email & Skype: info@chipsmall.com Web: www.chipsmall.com Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China





# Double shield support AB-SK 65-D

### 1. Description


For the SK shield terminal system there is now a solution for supporting cable shields on both sides. The double support is simply engaged onto the mounting rail for connection. The support is offering a holding fixture for the neutral conductor bus bar 3 x 10 mm on both sides of the mounting rail. On this fixture the cable shield is mounted by means of the well-known shield terminal SK... There are two different versions of the double support available:

#### AB-SK 65-D

In this solution both sides of the support are contacted to each other and are directly connected to the mounting rail. Thus the interference potential is directly dissipated to PE.

#### AB-SK 65-D Isolated

In contrast to the previous version there is no dissipation plate integrated in the support. Due to this both sides are independent of each other and are not directly connected to the mounting rail. This construction is needed if the cable shield is not connected directly to the PE, but shall be lead from the neutral conductor bus bar to a neutral point.





## 2. Technical data


2.1. Description		Туре	Order No.	<u>Pcs.</u> Pkt.
Double support, for assembly on the mounting rail ⊥r, for 3 x 10 mm bus bars	gray	AB-SK 65-D	30 26 90 0	10
<b>Double support,</b> for assembly on the mounting rail ربر, no contact to the mounting rail ربر, for 3 x 10 mm bus bars	gray	AB-SK 65-D ISOLATED	30 40 88 9	10

8,2 PA V0

#### 2.2. General data

Width	[mm]
Material Inflammability class in acc. with UL 94	

Туре	Order No.	<u>Pcs.</u> Pkt.
AB-SK 65-D	30 26 90 0	10
AB-SK 65-D ISOLATED	30 40 88 9	10

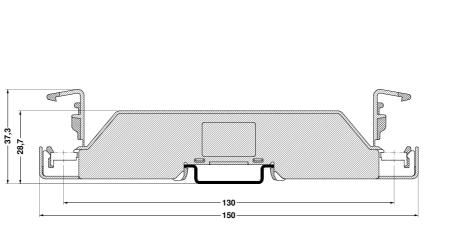

AB-SK 65-D