



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



CnC Tech . LLC



STYLE 品名	PVC INSULATED 105 ° C 300V HOOK UP WIRE	DATE 日期	2011-8-19
SIZE 规格	UL2651 28AWG 7/0.127TS CONDUTOR	REV 版本	A0
ITEM 类型	HF-XXP-28#-7/0.127TS-1.27		

STANDARD 标准: UL758 UL1581 C22.2
 APPLICATION 用途: INTERNAL WIRING OF APPLIANCES AND ELECTRONIC EQUIPMENT
 CONSTRUCTION 加工:

CONDUCTOR 导体	SIZE 规格	28AWG			
	CONSTRUCTION 结构	7/0.127 ± 0.005mmTS			
	MATERIAL 材质	TINNED COPPER CONDUCTOR			
	CONDUCTOR DIAMETER 导体直径	0.381mm			
INSULATION 绝缘	MINIMUM THICKNESS 最小厚度	0.21mm			
	AVERAGE THICKNESS 平均厚度	0.26mm			
	COLOR 颜色	UL2651棕红橙黄绿蓝紫灰白黑 FLAT CABLE			
JACKET 外被	DIAMETER 外径	0.9 ± 0.1			
	MATERIAL 材质	105 ° C PVC			
	PITCH 间距	1.27 ± 0.15mm			
	MARKING 印字	无			
ELECTRIC 电气 FUNCTION 功能	RATE VOLTAGE 额定电压	300V			
	VOLTAGE-WITHSTAND 耐电压	2500V			
	COND. RESISTANCE 导体电阻	MAX: 237Ω /KM 20 ° C			
	INSU. RESISTANCE 绝缘电阻	MAX: 100MΩ /KM 20 ° C			
	TENSILE STRENGTH 抗张强度	老化前	1500PSI	老化后	1290 PSI (85%)
	ELONGATION 伸长率	老化前	100%	老化后	75% (65%)

FLAT /WIRE CABLE 排线/电线:

UNIT 单位: mm

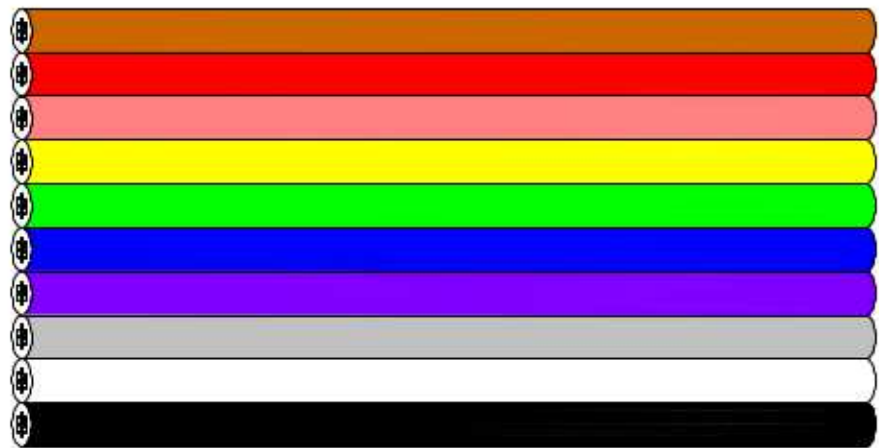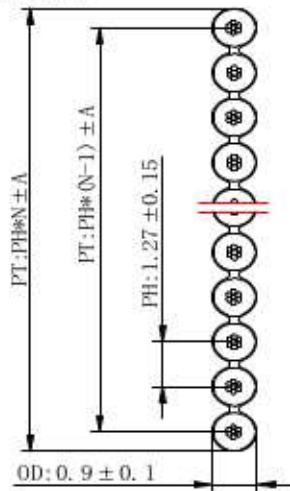

$N \leq 30 \quad A = \pm 0.3$

$N \geq 31 \quad A = \pm 0.4$

制作:	王绍富	审核:		核准:	
-----	-----	-----	--	-----	--