



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China





30,000 Watt Transient Voltage Suppressor (TVS) Protection Device

**HALOGEN
FREE**

DESCRIPTION

This device clamps dangerous high-voltage short-term transients such as those produced by the secondary effects of lightning strikes, providing circuit protection to several class levels in the IEC61000-4-5 specification. Clamping time is virtually instantaneous. It also provides protection from transients caused by inductive load dumps, RFI, and ESD, providing protection to IEC61000-4-2 and -4-4.

Important: For the latest information, visit our website <http://www.microsemi.com>.

FEATURES

- Available in both unidirectional and bidirectional configurations
- 5% voltage tolerance
- Moisture classification is Level 1 with no dry pack required per IPC/JEDEC J-STD-020B
- RoHS compliant (2002/95/EC)
- MSL level 1 (J-STD-020)
- RoHS compliant

APPLICATIONS / BENEFITS

- Protection from transients caused by lightning strikes, switching transients, RFI, and ESD.
- Protection from the secondary effects of lightning per IEC61000-4-5
- Protection from ESD, and EFT per IEC 61000-4-2 and IEC 61000-4-4

MAXIMUM RATINGS @ 25 °C unless otherwise noted

Parameters/Test Conditions	Symbol	Value	Unit
Junction and Storage Temperature	T_J and T_{STG}	-55 to +175	°C
Thermal Resistance, Junction to Lead @ 3/8 inch (10 mm) lead length from body	$R_{\theta JL}$	8.0	°C/W
Thermal Resistance, Junction to Ambient	$R_{\theta JA}$	77.5	°C/W
Non Repetitive Peak Forward Surge Current (8.3ms single half sine wave) ⁽¹⁾	I_{FSM}	400	A
Rated Average Power Dissipation @ $T_L = 75$ °C, (0.375 inch (9.5 mm) from body) ⁽²⁾	$P_{M(AV)}$	8.0	W
Peak Pulse Power Dissipation with a 10/1000 μ s waveform (see Figure 1)	P_{PP}	30,000	W
Peak Pulse Current with a 10/1000 μ s waveform ⁽³⁾	I_{PP}	See Electrical Table	A
Solder Temperature @ 10 s		260	°C

- Notes:**
1. Measured on 8.3ms single half sine-wave or equivalent square wave, duty cycle = 4 pulses per minute maximum
 2. Mounted as shown in [Figure 5](#)
 3. Non-repetitive current pulse, per [Figure 3](#) and derated above $T_A = 25$ °C per [Figure 2](#)



P600 Package

MSC – Lawrence

6 Lake Street,
Lawrence, MA 01841
1-800-446-1158 or
(978) 620-2600
Fax: (978) 689-0803

MSC – Ireland

Gort Road Business Park,
Ennis, Co. Clare, Ireland
Tel: +353 (0) 65 6840044
Fax: +353 (0) 65 6822298


Website:

www.microsemi.com

MECHANICAL and PACKAGING

- CASE: Epoxy body meets UL94V-0
- TERMINALS: Matte-tin plating, fully RoHS compliant. Solderable per MIL-STD-750, method 2026.
- MARKING: Manufacturer ID, date code and part number
- POLARITY: For unidirectional types the color band denotes the cathode, which is positive with respect to the anode under normal TVS operation.
- TAPE & REEL option: Standard per EIA-296 (add "TR" suffix to part number). Consult factory for quantities.
- WEIGHT: Approximately 0.07 ounce (2.0 grams)
- See [Package Dimensions](#) on last page.

PART NOMENCLATURE

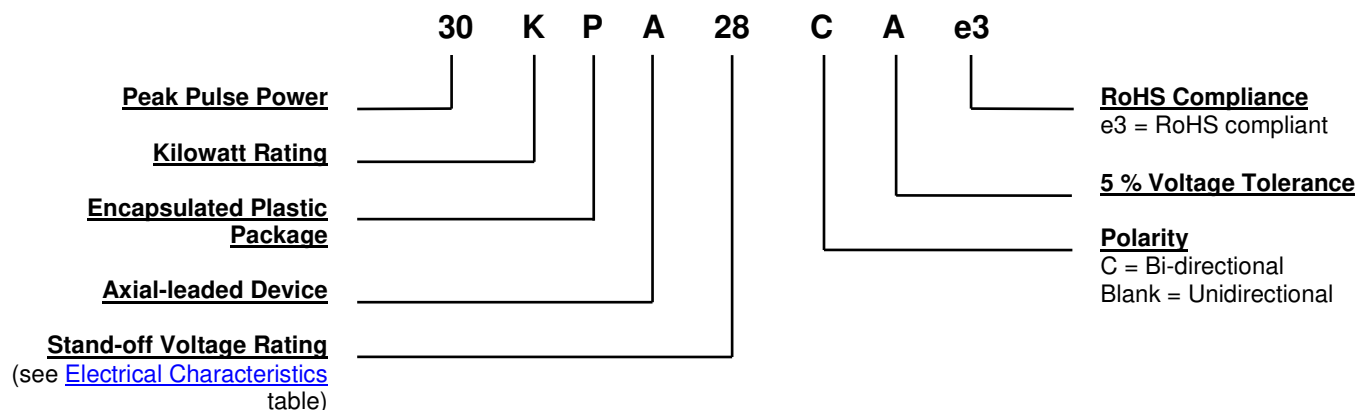

SYMBOLS & DEFINITIONS

Symbol	Definition
$\alpha_{V(BR)}$	Temperature Coefficient of Breakdown Voltage: The change in breakdown voltage divided by the change in temperature that caused it expressed in %/°C or mV/°C.
I_D	Standby Current: The current through the device at rated stand-off voltage.
I_{PP}	Peak Impulse Current: The maximum rated random recurring peak impulse current or nonrepetitive peak impulse current that may be applied to a device. A random recurring or nonrepetitive transient current is usually due to an external cause, and it is assumed that its effect will have completely disappeared before the next transient arrives.
P_{PP}	Peak Pulse Power. The rated random recurring peak impulse power or rated nonrepetitive peak impulse power. The impulse power is the maximum-rated value of the product of I_{PP} and V_C .
$V_{(BR)}$	Breakdown Voltage: The voltage across the device at a specified current $I_{(BR)}$ in the breakdown region.
V_C	Clamping Voltage: The voltage across the device in a region of low differential resistance during the application of an impulse current (I_{PP}) for a specified waveform.
V_{WM}	Working Standoff Voltage: The maximum-rated value of dc or repetitive peak positive cathode-to-anode voltage that may be continuously applied over the standard operating temperature.

ELECTRICAL CHARACTERISTICS @ 25 °C

DEVICE	BREAKDOWN VOLTAGE ⁽²⁾ V _(BR) @ I _(BR) (Volts)		TEST CURRENT I _(BR) (mA)	STAND-OFF VOLTAGE V _{WM} (Volts)	MAXIMUM STANDBY CURRENT ⁽⁴⁾ I _D @ V _{WM} (µA)	MAXIMUM PEAK PULSE CURRENT ⁽³⁾ I _{PP} (A)	MAXIMUM CLAMPING VOLTAGE V _C @ I _{PP} (Volts)	MAXIMUM TEMPERATURE COEFFICIENT α _{V(BR)} (%/ °C)
	Min	Max						
30KPA28Ae3 / 30KPA28CAe3	31.28	34.2	50	28	5000	606.0	50.0	0.1
30KPA30Ae3 / 30KPA30CAe3	33.51	36.7	50	30	5000	548.9	55.2	0.1
30KPA33Ae3 / 30KPA33CAe3	36.90	40.4	50	33	5000	517.9	58.5	0.1
30KPA36Ae3 / 30KPA36CAe3	40.20	44.0	50	36	5000	490.3	61.8	0.1
30KPA39Ae3 / 30KPA39CAe3	43.60	47.7	20	39	2000	450.9	67.2	0.1
30KPA42Ae3 / 30KPA42CAe3	46.90	51.3	10	42	1000	420.8	72.0	0.1
30KPA43Ae3 / 30KPA43CAe3	48.00	52.6	10	43	1000	415.1	73.0	0.1
30KPA45Ae3 / 30KPA45CAe3	50.30	55.0	5	45	250	391.5	77.4	0.1
30KPA48Ae3 / 30KPA48CAe3	53.60	58.7	5	48	150	371.3	81.6	0.1
30KPA51Ae3 / 30KPA51CAe3	57.00	62.4	5	51	50	350.7	86.4	0.1
30KPA54Ae3 / 30KPA54CAe3	60.30	66.0	5	54	20	331.5	91.4	0.1
30KPA58Ae3 / 30KPA58CAe3	64.80	70.9	5	58	20	327.9	92.4	0.1
30KPA60Ae3 / 30KPA60CAe3	67.00	73.4	5	60	15	297.1	102	0.1
30KPA64Ae3 / 30KPA64CAe3	71.50	78.3	5	64	10	291.3	104	0.1
30KPA66Ae3 / 30KPA66CAe3	73.70	80.7	5	66	2	283.2	107	0.1
30KPA70Ae3 / 30KPA70CAe3	78.20	85.6	5	70	2	278.0	109	0.1
30KPA71Ae3 / 30KPA71CAe3	79.3	86.8	5	71	2	271.1	111.5	0.1
30KPA72Ae3 / 30KPA72CAe3	80.4	88.0	5	72	2	265.8	114.0	0.1
30KPA75Ae3 / 30KPA75CAe3	83.8	91.7	5	75	2	253.8	119.4	0.1
30KPA78Ae3 / 30KPA78CAe3	87.1	95.4	5	78	2	234.9	129.0	0.1
30KPA84Ae3 / 30KPA84CAe3	93.8	102.7	5	84	2	217.7	139.2	0.1
30KPA90Ae3 / 30KPA90CAe3	100.5	110.1	5	90	2	207.0	146.4	0.1
30KPA96Ae3 / 30KPA96CAe3	107.2	117.4	5	96	2	194.2	156.0	0.1
30KPA102Ae3 / 30KPA102CAe3	113.9	124.7	5	102	2	183.0	165.6	0.1
30KPA108Ae3 / 30KPA108CAe3	120.6	132.0	5	108	2	172.9	175.2	0.1
30KPA120Ae3 / 30KPA120CAe3	134.0	146.8	5	120	2	155.9	194.4	0.1
30KPA132Ae3 / 30KPA132CAe3	147.4	161.4	5	132	2	142.3	213.0	0.1
30KPA144Ae3 / 30KPA144CAe3	160.8	176.1	5	144	2	135.8	223.2	0.1
30KPA150Ae3 / 30KPA150CAe3	167.6	183.5	5	150	2	129.8	233.4	0.1
30KPA156Ae3 / 30KPA156CAe3	174.3	190.8	5	156	2	123.7	245.0	0.1
30KPA160Ae3 / 30KPA160CAe3	178.7	195.7	5	160	2	120.0	252.6	0.1
30KPA168Ae3 / 30KPA168CAe3	187.7	205.5	5	168	2	111.2	272.4	0.1
30KPA170Ae3 / 30KPA170CAe3	189.9	207.9	5	170	2	110.2	275.0	0.1
30KPA180Ae3 / 30KPA180CAe3	201.1	220.1	5	180	2	104.3	290.4	0.1
30KPA198Ae3 / 30KPA198CAe3	221.2	242.2	5	198	2	94.7	319.8	0.1
30KPA216Ae3 / 30KPA216CAe3	241.3	264.2	5	216	2	86.9	348.6	0.1
30KPA240Ae3 / 30KPA240CAe3	268.1	293.5	5	240	2	78.3	387.0	0.1
30KPA258Ae3 / 30KPA258CAe3	288.2	315.6	5	258	2	72.8	416.4	0.1
30KPA260Ae3 / 30KPA260CAe3	290.4	318.0	5	260	2	72.8	416.0	0.1
30KPA270Ae3 / 30KPA270CAe3	301.6	330.2	5	270	2	69.5	436.2	0.1

Continued on next page.

ELECTRICAL CHARACTERISTICS @ 25 °C (continued)

DEVICE	BREAKDOWN VOLTAGE ⁽²⁾ $V_{(BR)}$ @ $I_{(BR)}$ (Volts)		TEST CURRENT $I_{(BR)}$ (mA)	STAND-OFF VOLTAGE V_{WM} (Volts)	MAXIMUM STANDBY CURRENT ⁽⁴⁾ I_D @ V_{WM} (μ A)	MAXIMUM PEAK PULSE CURRENT ⁽³⁾ I_{PP} (A)	MAXIMUM CLAMPING VOLTAGE V_C @ I_{PP} (Volts)	MAXIMUM TEMPERATURE COEFFICIENT $\alpha_{V(BR)}$ (%/ °C)
	Min	Max						
30KPA280Ae3 / 30KPA280CAe3	312.8	342.4	5	280	2	65.3	464.0	0.1
30KPA288Ae3 / 30KPA288CAe3	321.7	352.2	5	288	2	64.5	469.9	0.1

Consult factory for higher voltages.

NOTES:

- (1) All ratings at 25 °C unless specified otherwise.
- (2) $V_{(BR)}$ measured after $I_{(BR)}$ applied for 300 μ s, $I_{(BR)}$ = square wave pulse or equivalent.
- (3) Surge current waveform per [Figure 3](#) and derated per [Figure 2](#).
- (4) For bidirectional types with V_{WM} of 30 volts and less, the I_D limit is doubled.

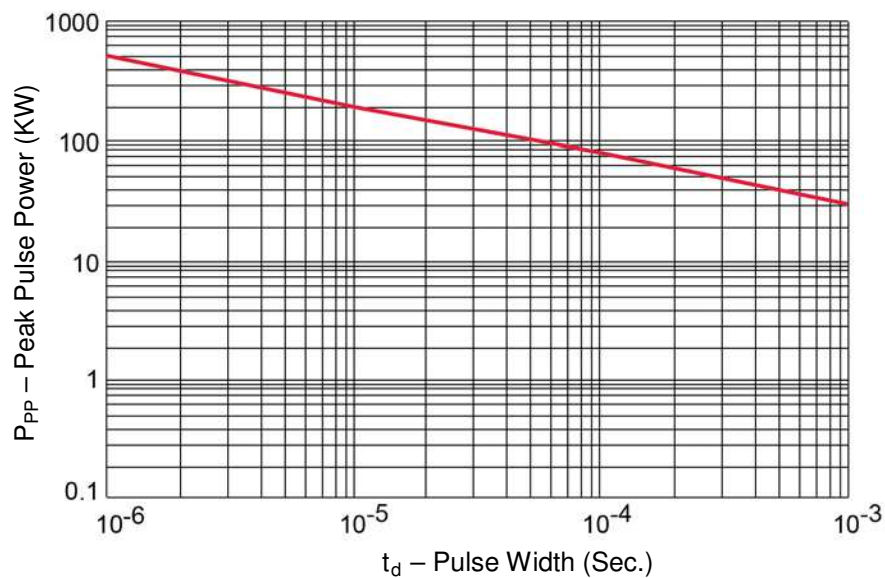
GRAPHS


FIGURE 1
Peak Pulse Power Rating Curve

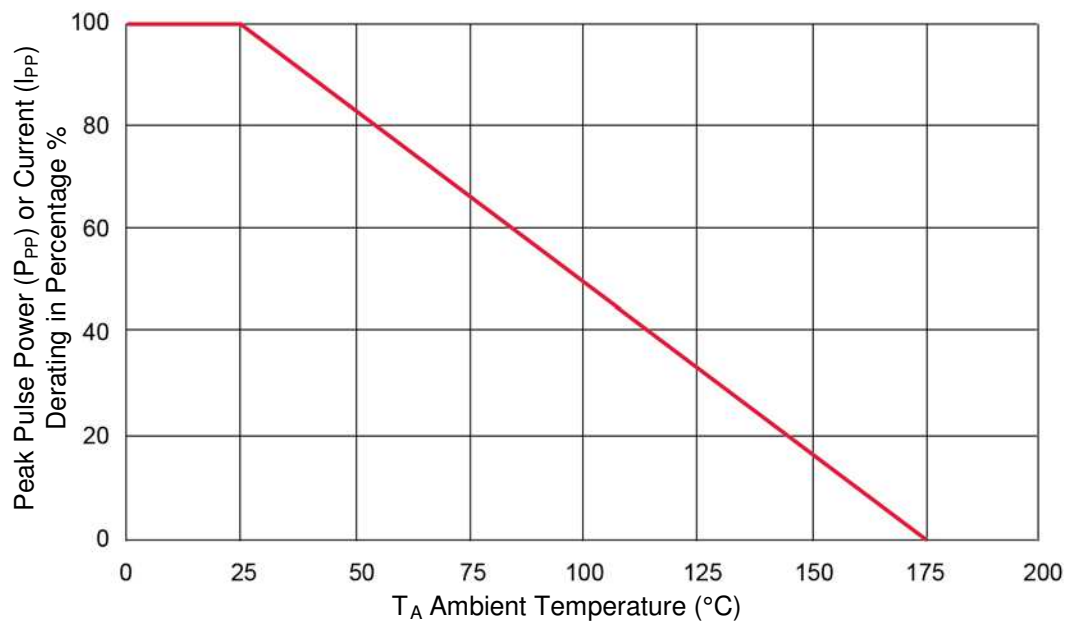
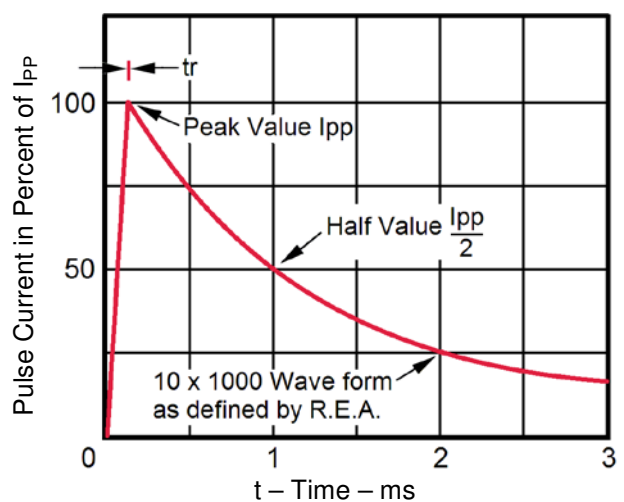



FIGURE 2
Pulse Derating Curve

GRAPHS (continued)


Test waveform parameters: $t_r=10\ \mu s$, $t_p=1000\ \mu s$

FIGURE 3

Pulse Waveform for 10/1000 Exponential Surge

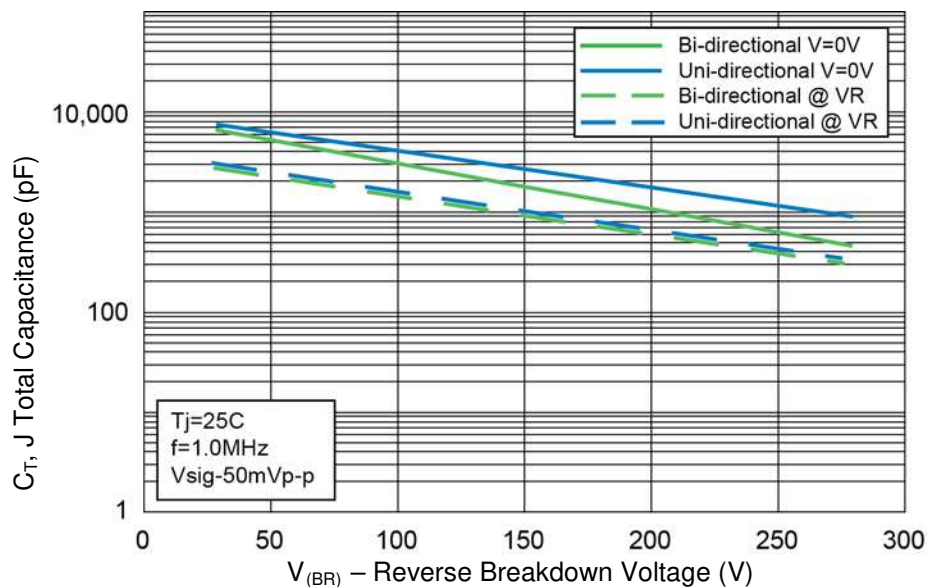
FIGURE 4

Typical Junction Capacitance

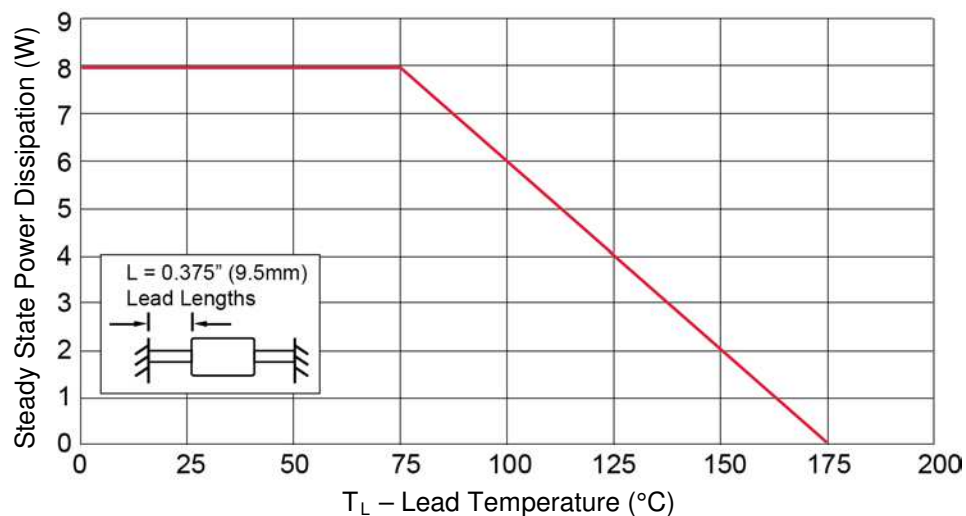
GRAPHS (continued)


FIGURE 5
Steady State Power Derating Curve

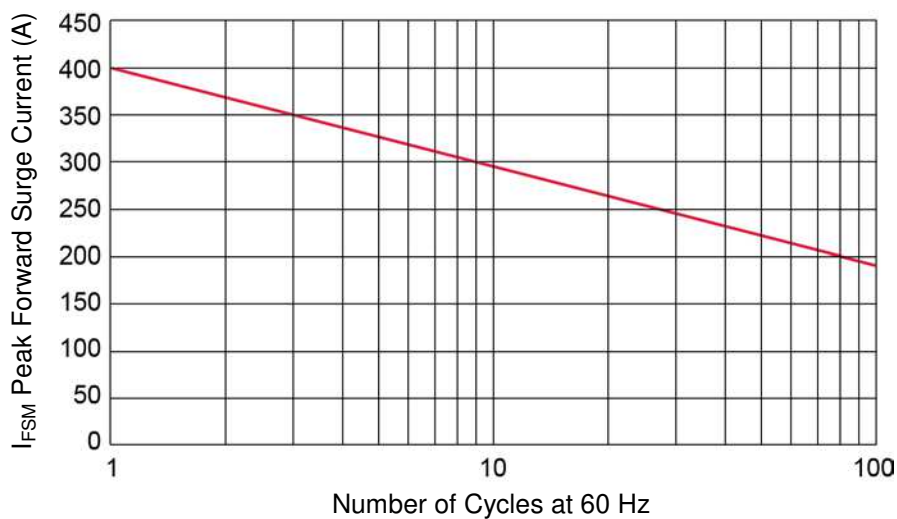
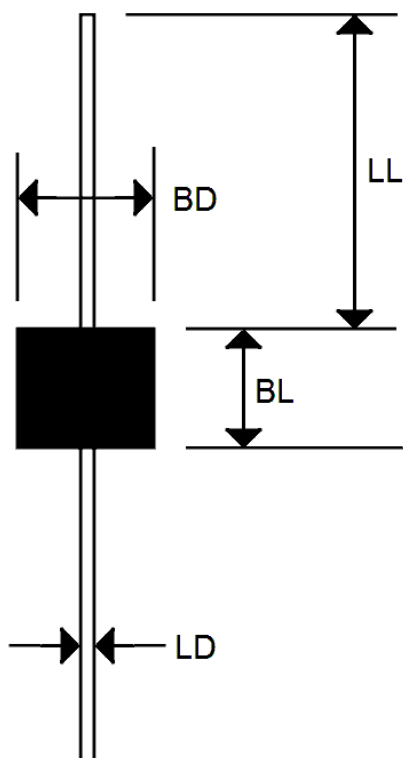


FIGURE 6
Maximum Non-repetitive Forward Surge Current

PACKAGE DIMENSIONS


Dim	Dimensions			
	Inch		Millimeters	
	Min	Max	Min	Max
LL	0.750	-	19.05	-
BL	0.340	0.360	8.645	9.135
BD	0.340	0.360	8.645	9.135
LD	0.047	0.053	1.194	1.346