



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832


Email & Skype: [info@chipsmall.com](mailto:info@chipsmall.com) Web: [www.chipsmall.com](http://www.chipsmall.com)

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China








- NOTES:
- MATERIALS AND FINISHES:  
BODY - BRASS, SILVER PLATING  
CONTACT - BERYLLIUM COPPER, SILVER PLATING  
CLAMP NUT - BRASS, NICKEL PLATING  
LOCKWASHER - PHOSPHOR BRONZE, NICKEL PLATING  
INSULATOR - PTFE
  - ELECTRICAL:  
A. IMPEDANCE: 50 OHM
  - MECHANICAL:  
A. DURABILITY: 500 CYCLES MIN.  
B. TEMPERATURE RANGE: -65° C TO +165° C
  - PACKAGING:  
A. QUANTITY: SINGLE PACK  
B. MARKING: BAG TO BE MARKED  
"AMPHENOL RF, 31-206, AND DATE CODE"
  - SHOWS CABLE ENTRY DIMENSIONS.
  - USED WITH RG-55/U AND RG-58/U CABLES.
  - CONTACT PIN SOLDER TO CABLE.



PANEL MOUNTING HOLE DETAIL



RECOMMENDED STRIPPING LENGTH

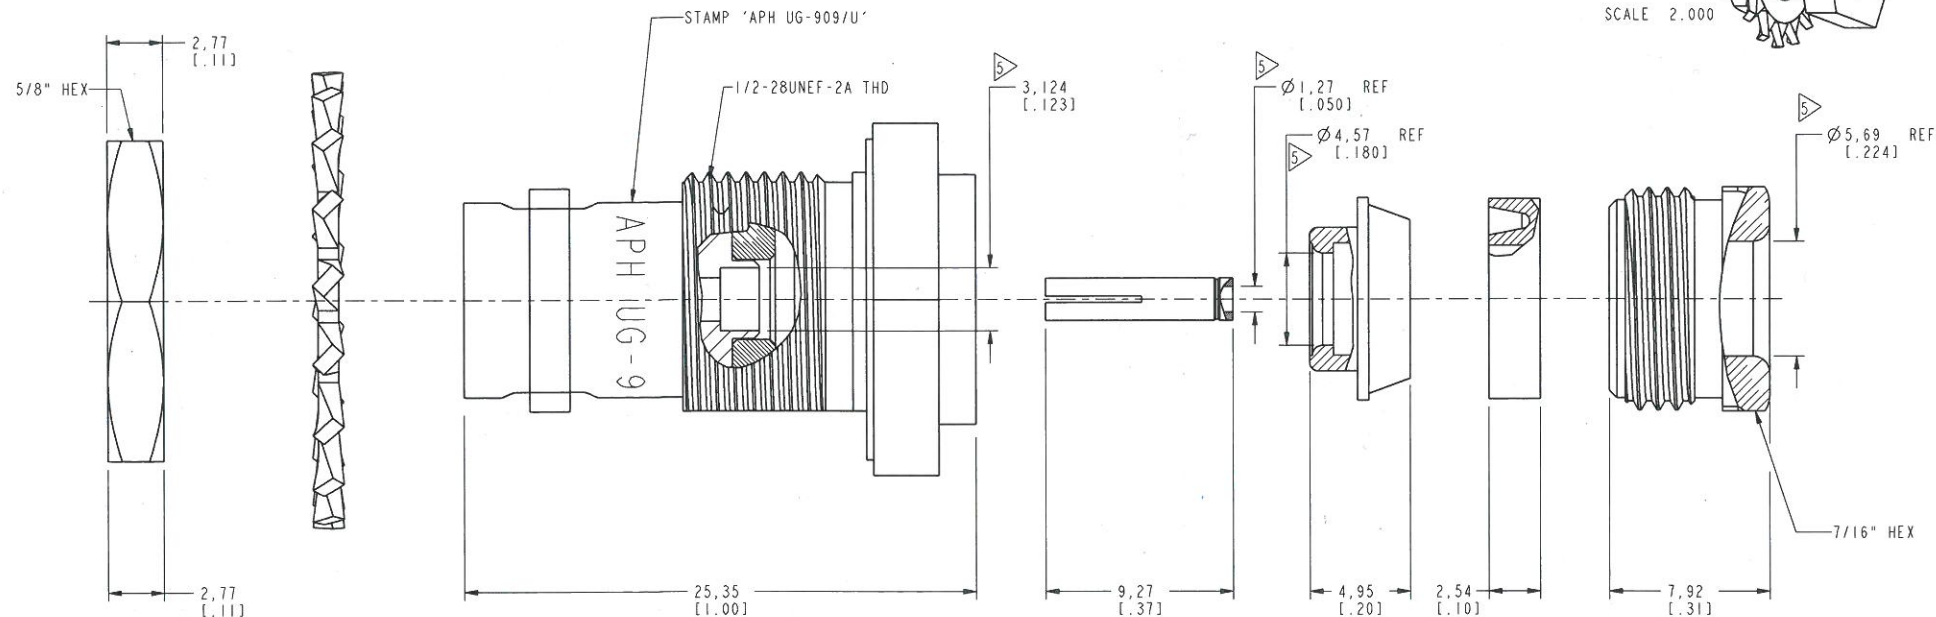

**CUSTOMER OUTLINE DRAWING**  
ALL OTHER SHEETS ARE FOR INTERNAL USE ONLY

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN METRIC AND TOLERANCES ARE:  
 <0.5mm ±0.05mm 0.5 - 6mm ±0.1mm 6 - 30mm ±0.2mm 30 - 120mm ±0.3mm ANGLES ±1°

NOTICE - These drawings, specifications, or other data (1) are, and remain the property of Amphenol Corp. (2) must be returned upon request; and (3) are confidential and not to be disclosed to any person other than those to whom they are given by Amphenol Corp. the furnishing of these drawings, specifications, or other data by Amphenol Corp., or to any other person to anyone for any purpose is not to be regarded by implication or otherwise in any manner licensing, granting rights to permitting such holder or any other person to manufacture, use or sell any product, process or design, patented or otherwise, that may in any way be related to or disclosed by said drawings, specifications, or other data.

MATERIAL SEE NOTE	DRAWN I. XU	DATE 23-Jun-11	TITLE BNC JACK BULKHEAD UG-909/U	Amphenol RF Donbury CT USA, Tainan, Taiwan, Shenzhen, China www.amphenolrf.com
	ENGINEER FJ MARSHAL	DATE 06-Feb-53		
REFERENCE	APPROVED S. HSIEH	DATE 23-Jun-11	SCALE: 4.0:1.0 SHEET 2 OF 2	DRAWING NO. 31-206
	CAD FILE			ITEM NO. 31-206
FINISH			DWG SIZE B	REV V
				PART NO. 31-206