



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832


Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China




a) PART AS SUPPLIED

312W021-G01

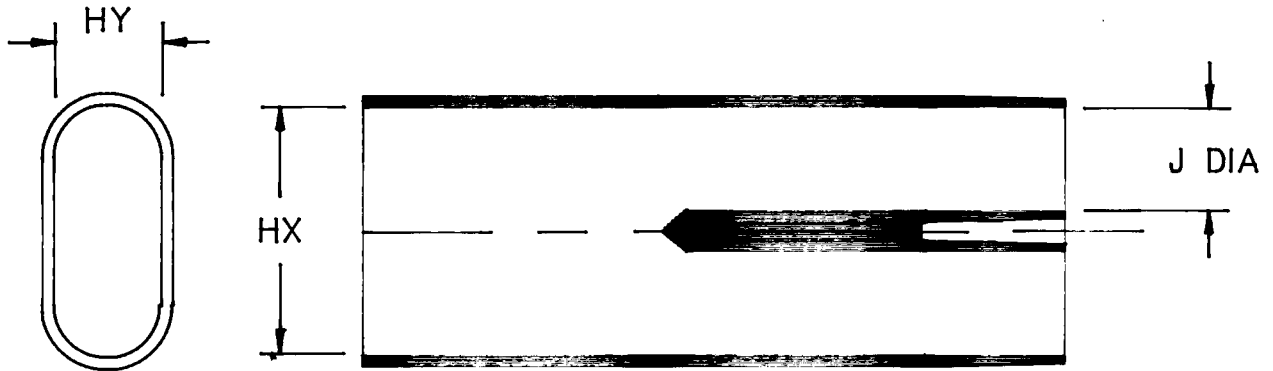

b) PART AFTER UNRESTRICTED RECOVERY

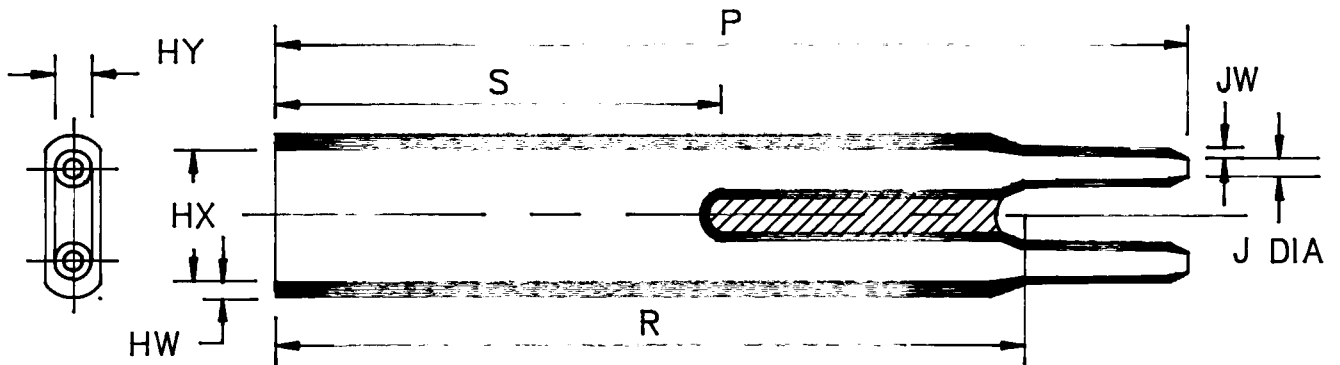

DIMENSIONS (in millimetres)

PART NUMBER	HX	HX	HY	HY	J	J	P	R	S	HW	JW
	MIN	MAX	MIN	MAX	MIN	MAX	±10%	±10%	±10%	±20%	±20%
	a	b	a	b	a	b	b	b	b	b	b
312W021 -G01	15	9,5	6	2,7	8	1,5	60	48,5	27	1,0	0,5

Drawn **A.LILLEY**

Checked *[Signature]*

Issue **1**

Date **JAN.1988**


Approval

Design *[Signature]*


MKTG *[Signature]*

Q.C. *[Signature]*

Conforms to ISO Recommendations
3rd Angle Projection
Not to scale



Ordering Information

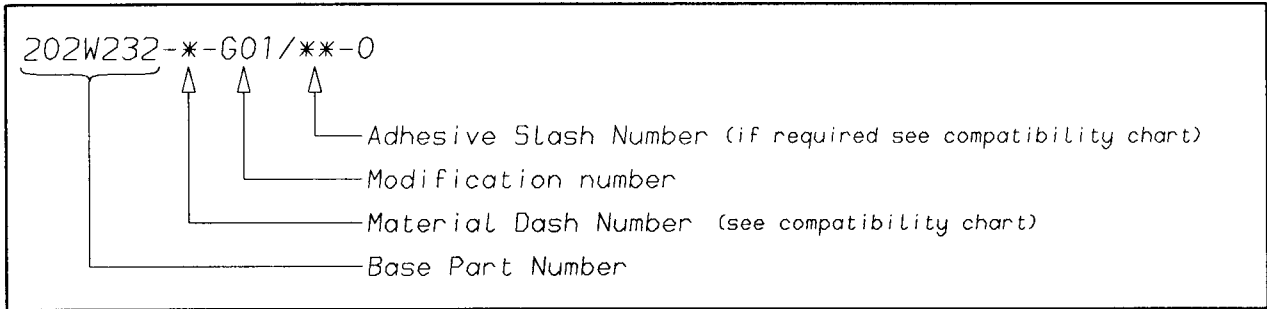

COMPATIBILITY CHART

MATERIAL DASH NUMBER	MATERIAL DESCRIPTION	COATING SLASH NUMBER
-3	POLYOLEFIN, SEMI-RIGID	/42, /86
-4	POLYOLEFIN, FLEXIBLE	/42, /86
-25	ELASTOMER, FLUID RESISTANT	/86, /225

AS SUPPLIED DIMENSIONS ARE FOR UNCOATED PARTS,
WHEN COATING IS ADDED, ENTRY DIAMETERS WILL REDUCE BY 1.5mm MAX.