



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com


Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China





2W Solar Panel 80X180

SKU 313070003

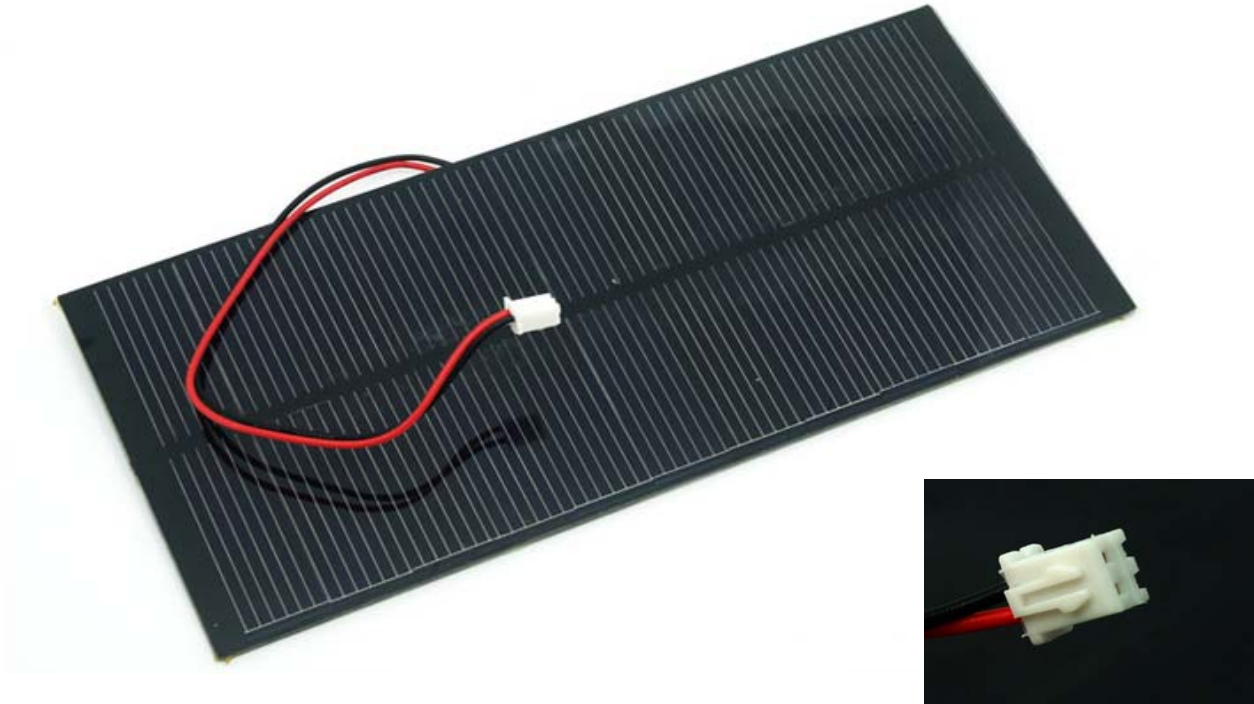

Description

This solar panel is made of single-crystal material that performs high solar energy transformation efficiency at 17%. It has a fine resin surface and sturdy back suitable for outdoor environments. A 2mm JST connector is attached to the panel, which makes it perfect to team up with most of our can-use-solar-power-supply boards, like [Seeeduino microcontroller series](#), [Lipo Rider charging boards series](#) and [XBee carrier WSN products series](#).

The typical open circuit voltage is around 5V, depending on light intensity. In those bright summer days with clear sky and big sun, the peak OC voltage can rush up to 10V. To prevent any damage to boards that accept a narrow range of input voltage, like Lipo Rider, it's recommended to check whether the OC voltage is safe before any connection.

Features

Dimensions: 180x80x2.5(± 0.2) mm

Typical voltage: 5.5V

Typical current: 360mA

Open-circuit voltage: 8.2 V

Maximum load voltage: 6.4V

