



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



HOOK-UP WIRE

PVC INSULATION
HARMONIZED, TRI-RATED

HAR: HD 21.5 H05V-K H07V-K
UL 1015, CSA or TEW

CHOOSE HARMONIZED/ TRI-RATED HOOK-UP WIRE FOR:

- Installation in Electronic and Electrical Equipment Designed For Use in Europe
- North American **AND** European Compliance
- Adherence to CENELEC Guidelines

HARMONIZED HOOK-UP WIRE APPLICATIONS:

- Internal Wiring of Appliances
- Internal Wiring of Electronic and Electrical Devices
- Wiring of Switches, PC Boards, and Distribution Boards in Production Facilities
- Internal Wiring of Industrial Machines and Equipment
- Internal Wiring of Electric Hand Tools
- Internal Wiring of Medical Devices
- Wiring in Closed Conduit Installations
- Internal Wiring in Vending and ATM Equipment
- For Use in International Cords and Cord Sets

CHARACTERISTICS

OPERATING TEMPERATURE:

- -30°C to +70°C (HAR — All Part Numbers)
- -10°C to +105°C (UL/CSA)

VOLTAGE RATING:


- H05V-K: 300/500 Volt_{rms} (HAR)
- H07V-K: 450/750 Volt_{rms} (HAR)
- UL 1015/CSA TEW: 600 Volt_{rms}

COLOR DESCRIPTION:

- Stock Colors: Black, Blue, Brown, Green/Yellow

PRODUCT DESCRIPTION:

- Conductor: Fine Stranded Bare Copper, Meets VDE 0295, Class 5, Part 3 (IEC 228, Class 5)
- Insulation: Color-Coded PVC Insulation
- Insulation Resistance: 20 G-ohm-cm, Maximum

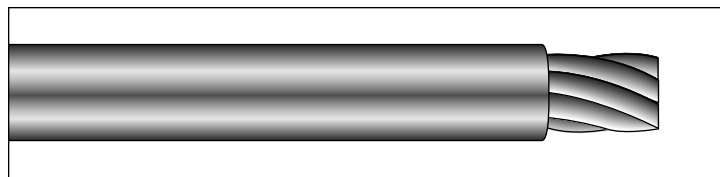

Alpha Part No.	AWG	Conductor mm ²	Strand*	Insul. In.	Wall mm	Diameter In.	Diameter mm
H05V-K; UL AWM STYLE 1015 (105°C/600V/VW-1); CSA TEW (105°C/FT-1)							
3130	18	1,0	31/32	0.031	0,8	0.114	2,90
H07V-K; UL AWM STYLE 1015 (105°C/600V/VW-1); CSA TEW (105°C/FT-1)							
3131	16	1,5	30/30	0.003	0,8	0.130	3,30
3132	14	2,5	50/30	0.033	0,8	0.150	3,80
3133	12	4,0	56/28	0.033	0,8	0.169	4,30
3134	10	6,0	84/28	0.033	0,8	0.193	4,90
3135	8	10,0	80/26	0.056	1,4	0.268	6,80

*Conductor size based on DC resistance therefore strand count may vary.

SPECIFICATIONS

- Bend Radius: 15X Wire Diameter
- HAR H05V-K; HD 21.5 S3; DIN 57281/VDE 0281-5
- HAR H07V-K; HD 21.5 S3; DIN 57281/VDE 0281-5
- IEC 60227-1, -2, -5
- IEC 60228
- IEC 60304
- UL AWM Style 1015, CSA TEW
- CE Low Voltage Directive 73/23/EEC — Amendment 93/68/EEC

CE < HAR >

 **Recognized Component**
Underwriters Laboratories Inc.

 **Certified**
Canadian Standards Association

AVAILABILITY

- 100 ft (30,5m), 1000 ft (305m) Spools



Toll Free: 1-800-52 ALPHA • Telephone: 908-925-8000 • Fax: 908-925-6923
Europe/UK Telephone: +44 (0) 1932 772422 • Europe/UK Fax: +44 (0) 1932 772433

Web Site: www.alphawire.com
Email: info@alphawire.com