



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China





Heat Shrinkable Tubing up to 3:1 - 1 m lengths

TREDUX thin wall

TREDUX thin wall heat shrink tubing is used for general electrical insulation and mechanical protection of cables and wires.

Features and Benefits



- Thin walled, flexible, cross-linked polyolefin tubing
- 1m shrink tubing lengths delivered in handy display carton
- 9 sizes from 1.5 mm to 101.6 mm
- Colours: black and yellow/green



**More colours on request.
Please contact us!**



One Step to the Web!

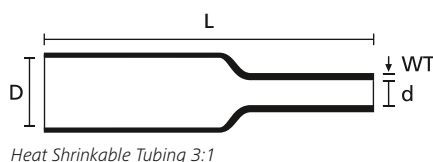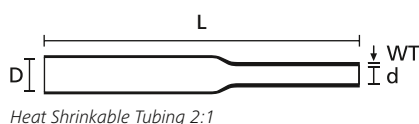

TREDUX shrinks a maximum of 3:1.

MATERIAL	Polyolefin, cross-linked (PO-X)	
Shrink Ratio	2:1	3:1
Operating Temperature	-55 °C to +135 °C	
Minimum Shrink Temperature	+100 °C	
Longitudinal change after shrinkage	+/-5 % max.	
Dielectric Strength	20 kV/mm according to ASTM D 150	
Flammability	UL224 VW-1	
Specifications	CSA, SAE - AMS - DTL-23053/5 Class 1 and 3, SAE - AMS - DTL-23053/5 Class 2 (clear), UL224 125 °C 600V VW-1	

RoHS ✓

TYPE	Supplied Ø D min.	Recov. Ø d max.	Wall (WT)	Length (L)	Pack Cont.	Colour	Shrink Ratio	Article-No.
TREDUX-1.5/0.5	1.5	0.5	0.50	1.0 m	20 pcs.	Black (BK)	3:1	319-00150
	1.5	0.5	0.50	1.0 m	20 pcs.	Green-Yellow (GNYE)	3:1	319-00157
TREDUX-3/1	3.0	1.0	0.60	1.0 m	20 pcs.	Black (BK)	3:1	319-00300
	3.0	1.0	0.60	1.0 m	20 pcs.	Green-Yellow (GNYE)	3:1	319-00307
TREDUX-6/2	6.0	2.0	0.70	1.0 m	15 pcs.	Black (BK)	3:1	319-00600
	6.0	2.0	0.70	1.0 m	15 pcs.	Green-Yellow (GNYE)	3:1	319-00607
TREDUX-12/4	12.0	4.0	0.85	1.0 m	10 pcs.	Black (BK)	3:1	319-01200
	12.0	4.0	0.85	1.0 m	10 pcs.	Green-Yellow (GNYE)	3:1	319-01207
TREDUX-24/8	24.0	8.0	1.20	1.0 m	5 pcs.	Black (BK)	3:1	319-02400
	24.0	8.0	1.20	1.0 m	5 pcs.	Green-Yellow (GNYE)	3:1	319-02407
TREDUX-38.1/19.1	38.1	19.1	1.02	1.0 m	6 pcs.	Black (BK)	2:1	319-03800
	38.1	19.1	1.02	1.0 m	6 pcs.	Green-Yellow (GNYE)	2:1	319-03807
TREDUX-50.8/25.4	50.8	25.4	1.14	1.0 m	6 pcs.	Black (BK)	2:1	319-05100
TREDUX-76.2/38.1	76.2	38.1	1.27	1.0 m	3 pcs.	Black (BK)	2:1	319-07600
TREDUX-101.6/50.8	101.6	50.8	1.40	1.0 m	2 pcs.	Black (BK)	2:1	319-10200

All dimensions in mm. Subject to technical changes.
Minimum Order Quantity (MOQ) may differ from package content.



For product specific approvals and specifications please refer to the Appendix.