



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



Marshalling panel - RVS 10-TP(2,4X0,8)L - 3192038

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Marshalling panel, Nom. voltage: 250 V, Nominal current: 5 A, Cross section: 0.22 mm² - 0.56 mm², AWG: 20 - 24, Connection type: TERMI-POINT, Width: 6.2 mm, Length: 202 mm, Color: gray, Assembly: NS 35/7,5, NS 35/15

Product Features

- ✓ The red-white marking masks with alternating negative/positive 1 - 10 or a - k labeling clearly distinguish the rows of pins and make the process of connecting and finding specific connections much easier
- ✓ The external housing ridges act as a cable duct side panel, such that good cable routing is ensured and standard cable duct covers can be used
- ✓ The RVS 10 element has ten 2.4 x 0.8 mm TERMI-POINT[®](TP) pins for the incoming and outgoing conductors on both sides of the raised labeling rib



Key Commercial Data

| | |
|--------------------------------------|---|
| Packing unit | 1 pc |
| GTIN |  4 017918 093600 |
| Weight per Piece (excluding packing) | 68.64 g |
| Custom tariff number | 85369010 |
| Country of origin | Poland |

Technical data

General

| | |
|--|------|
| Number of levels | 1 |
| Number of connections | 20 |
| Color | gray |
| Insulating material | PA |
| Flammability rating according to UL 94 | V2 |
| Rated surge voltage | 4 kV |
| Pollution degree | 3 |
| Overvoltage category | III |

Marshalling panel - RVS 10-TP(2,4X0,8)L - 3192038

Technical data

General

| | |
|---------------------------|-------|
| Insulating material group | I |
| Nominal current I_N | 5 A |
| Max. load current | 5 A |
| Nominal voltage U_N | 250 V |
| Open side panel | nein |
| Number of positions | 1 |

Dimensions

| | |
|------------------|---------|
| Width | 6.2 mm |
| Length | 202 mm |
| Height NS 35/7,5 | 81.5 mm |
| Height NS 35/15 | 89 mm |

Connection data

| | |
|---------------------------------------|----------------------|
| Conductor cross section solid min. | 0.22 mm ² |
| Conductor cross section solid max. | 0.56 mm ² |
| Conductor cross section flexible min. | 0.22 mm ² |
| Conductor cross section flexible max. | 0.56 mm ² |
| Conductor cross section AWG min. | 24 |
| Conductor cross section AWG max. | 20 |
| Connection method | TERMI-POINT® |
| TERMI-POINT pin dimensions | 2.4 x 0.8 mm |
| Position of the TERMI-POINT pin | vertical |

Standards and Regulations

| | |
|--|----|
| Flammability rating according to UL 94 | V2 |
|--|----|

Classifications

eCl@ss

| | |
|------------|----------|
| eCl@ss 4.0 | 27141124 |
| eCl@ss 4.1 | 27141124 |
| eCl@ss 5.0 | 27141124 |
| eCl@ss 5.1 | 27141124 |
| eCl@ss 6.0 | 27141124 |
| eCl@ss 7.0 | 27141124 |
| eCl@ss 8.0 | 27141120 |

Marshalling panel - RVS 10-TP(2,4X0,8)L - 3192038

Classifications

ETIM

| | |
|----------|----------|
| ETIM 2.0 | EC000897 |
| ETIM 3.0 | EC000897 |
| ETIM 4.0 | EC000897 |
| ETIM 5.0 | EC000897 |

UNSPSC

| | |
|---------------|----------|
| UNSPSC 6.01 | 30211811 |
| UNSPSC 7.0901 | 39121410 |
| UNSPSC 11 | 39121410 |
| UNSPSC 12.01 | 39121410 |
| UNSPSC 13.2 | 39121410 |

Approvals

Approvals

Approvals

EAC

Ex Approvals

Approvals submitted


Approval details

| |
|-----|
| EAC |
|-----|

Drawings

Marshalling panel - RVS 10-TP(2,4X0,8)L - 3192038

Functional drawing

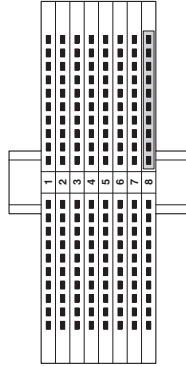

Dimensional drawing

