



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832


Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



PROPRIETARY INFORMATION:
 PROPRIETARY OF GLOBTEK, INC. ANY REPRODUCTION, DISCLOSURE OR USE OF THIS DRAWING, IN WHOLE OR IN PART, IS HEREBY PROHIBITED EXCEPT AS SPECIFIED IN WRITING BY GLOBTEK, INC.

| REVISION | | | |
|----------|--|----------|----------|
| REV | DESCRIPTION | DATE | APPROVED |
| A | INITIAL RELEASE | 08/23/02 | BS |
| B | REDRAW TO NEW FORMAT, RFS. 7964, DMR | 02/16/06 | BS |
| C | ADD ROHS, RFS. 12106, KT | 10/02/07 | HM |
| D | REVISE: C19 TO C20A, CABLE TO 105°C, RATING TO 20A, BULK PACK TO 10 pcs, RFS. 23040, JN | 06/04/12 | HM |
| E | REVERT TO 16A AS MARKED ON CONNECTOR; CORRECT END 'B' TO 'C19' FROM 'C20A', RFS. 23607, BS | 10/02/12 | HM |

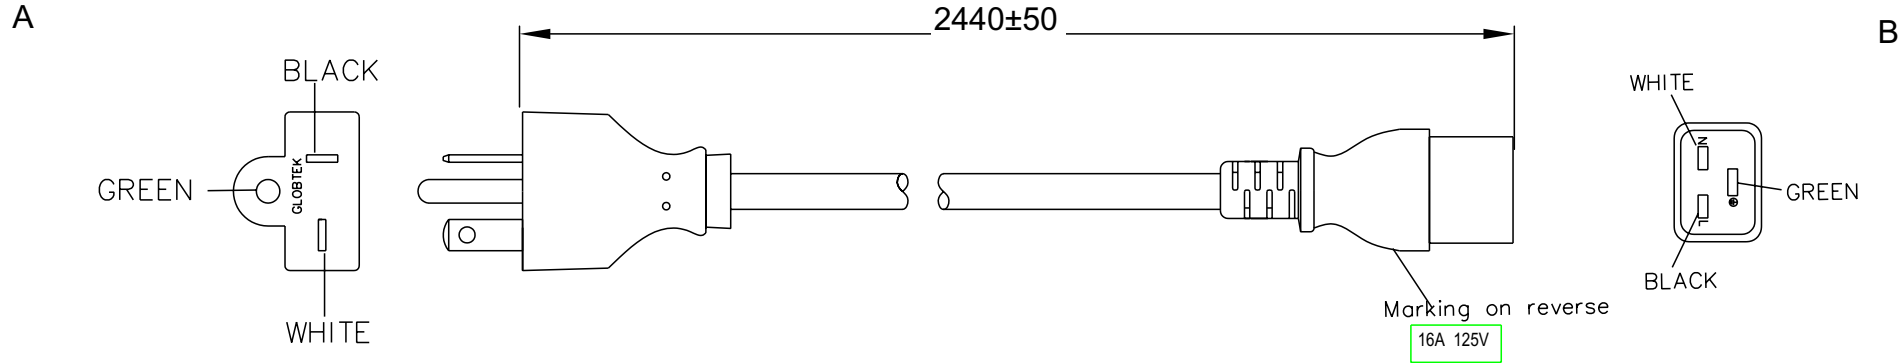

GENERAL SPECIFICATIONS:

RATING: 16A / 125V AC
 CABLE TYPE / SIZE: SJT, 12 AWG x 3C
 TEMPERATURE RATING: 105° C
 CONDUCTOR COLORS: BLACK / WHITE / GREEN
 CABLE JACKET COLOR: BLACK
 OVERALL LENGTH (L): 2440 ± 50 mm
 CABLE OUTER DIAMETER: 11 ± 0.2 mm
 END 'A' TERMINATION: NEMA 5-20P
 END 'B' TERMINATION: IEC 320 / C19
 APPROVALS PLUG: UL, CSA or cUL
 APPROVALS CABLE: UL, CSA or cUL
 APPROVALS CONNECTOR: UL, CSA or cUL

PACKING:

BULK PACKED, BUNDLES OF 10 pcs.
 MAXIMUM SHIPPING CARTON WEIGHT IS 30 KG.



NOTES:

1. CORD, PLUG AND CONNECTOR MUST BE MARKED WITH APPROVAL SYMBOLS OR FILE NUMBER(S).



| DASH NO. | PART NO | REV. | DESCRIPTION | NOTES |
|-------------------------|----------------|---|---------------------------------|---|
| TABULATION BLOCK | | | | |
| | | TOLERANCES: DECIMALS ANGULAR .xx +/- 0.1 +/- 1° .xxx +/- .005 | | GlobTek, Inc. www.globtek.com 186 Veterans Dr. Northvale, NJ 07647 Tel. 201-784-1000 Fax 201.784.0111 |
| | | MILLIMETERS ANGULAR .xx +/- 0.3 +/- 1° .xxx +/- .013 | | |
| INIT.BY: DMR | DATE: 02/16/06 | DWG TITLE: NORTH AMERICAN DETACHABLE CORDSET | | |
| DRAWN: NF | DATE: 02/16/06 | FSCN No.: G, E | SIZE: A | REV. E |
| APRVD: DMR | DATE: 02/16/06 | SCALE: NONE | PART NO: 3201368F7032(R) | SHEET 1/ 1 |

Foot Note:
 Globtek Inc. will not be liable for the safety and performance of these power product if unauthorized access and repair occurs. End user should consult the applicable UL, CSA or EN Standards for proper installation instruction.

Limitation of Use:
 Globtek product are not authorized for use as mission critical components in life support, hazardous environment, nuclear or aircraft applications without prior written approval from the CEO of Globtek Inc.

Contents of this document are subject to change without prior notice