



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China




AI...-B...

Ferrules in Tape Form With Insulating Collar According to DIN 46228-4

CLIPLINE

Data Sheet
103089_00_en

© PHOENIX CONTACT - 09/2006

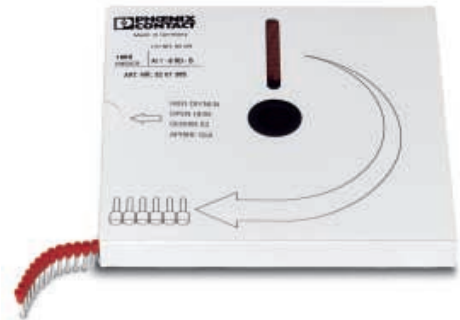

Description

In addition to individual ferrules, **AI...-B...** ferrules are available in tape form made from soft electrolytic copper (E-CU) with tin plating. They are connected together by a plastic connection. The dimensions of the ferrules correspond to DIN 46228-4.

When processed with the CF 3000 crimping machine, the cable is automatically stripped when inserted in the device, a ferrule is fitted, and crimped correctly.



Make sure you always use the latest documentation.
It can be downloaded at www.download.phoenixcontact.com.
A conversion table is available on the Internet at
www.download.phoenixcontact.com/general/7000_en_00.pdf.




This data sheet is valid for all products listed on the following page:

Dimensions and Ordering Data

Ferrules in Tape Form With Insulating Collar According to DIN 46228-4

Cross Section	l_1	l_2	d_1	d_2	R	Color	Type	Order No.	Pcs./Pck.
0.5 mm ²	14.5 mm	8.0 mm	1.1 mm	2.7 mm	3.6 mm	Orange	Al 0,5 - 8 OG-B	3201563	1000
0.5 mm ²	14.5 mm	8.0 mm	1.1 mm	2.7 mm	3.6 mm	White	Al 0,5 - 8 WH-B	3201369	1000
0.75 mm ²	14.5 mm	8.0 mm	1.3 mm	2.9 mm	3.7 mm	Blue	Al 0,75- 8 BU-B	3201547	1000
0.75 mm ²	14.5 mm	8.0 mm	1.3 mm	2.9 mm	3.7 mm	Gray	Al 0,75- 8 GY-B	3201372	1000
0.75 mm ²	14.5 mm	8.0 mm	1.3 mm	2.9 mm	3.7 mm	White	Al 0,75- 8 WH-B	3201576	1000
1 mm ²	14.5 mm	8.0 mm	1.5 mm	3.1 mm	4.0 mm	Red	Al 1 - 8 RD-B	3201385	1000
1 mm ²	14.5 mm	8.0 mm	1.5 mm	3.1 mm	4.0 mm	Yellow	Al 1 - 8 YE-B	3201589	1000
1.5 mm ²	14.5 mm	8.0 mm	1.8 mm	3.4 mm	4.2 mm	Black	Al 1,5 - 8 BK-B	3201398	1000
1.5 mm ²	14.5 mm	8.0 mm	1.8 mm	3.4 mm	4.2 mm	Red	Al 1,5 - 8 RD-B	3201592	1000
2.5 mm ²	14.5 mm	8.0 mm	2.3 mm	4.2 mm	5.0 mm	Blue	Al 2,5 - 8 BU-B	3201408	500
2.5 mm ²	14.5 mm	8.0 mm	2.3 mm	4.2 mm	5.0 mm	Gray	Al 2,5 - 8 GY-B	3201550	500



- l_1 = Total length
- l_2 = Sleeve length
- d_1 = Inside diameter of sleeve
- d_2 = Inside diameter of insulating collar
- R = Distance

Figure 1 Dimensions (tolerances according to DIN 46228-4)

Stripping and Crimping Machine

Description	Type	Order No.	Pcs./Pck.
Stripping and crimping machine, 230 V version for insulated ferrules in tape form according to DIN 46228-4, for cross section range 2 0.5 mm ² ... 2.5 mm ²	CF 3000-2,5	1205477	1
Stripping and crimping machine, 120 V version for insulated ferrules in tape form according to DIN 46228-4, for cross section range 2 0.5 mm ² ... 2.5 mm ²	CF 3000-2,5 120 V	1205516	1

Technical Data

General Data

Material

Collar

Sleeve

Polypropylene PP (UL94 HB), heat resistant up to 105°C

E-CU, tin-plated surface

© PHOENIX CONTACT 09/2006