



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China





Wiha Insulated Screwdrivers with SoftFinish® Cushion Grip Handle

Insulation Test Standards:

Insulation according to EN/IEC 60900, ASTM F-1505-01, New VDE 0682/part 201, DIN 7437, NFPA70E

Responds to OSHA's use specification 29 CFR1910

Each tool individually tested to 10,000 volts and certified to 1000 Volt ac or 1500 Volt dc

SoftFinish® handle solid molded core with soft outer cushion grip. 40% more torque than conventional handles

Insulation molded directly onto the blade for permanent bonding

Blade CVM tool steel, hardened to average 58/60RC

1000V



page 93



320 Slotted Screwdriver, With Wiha-SoftFinish® Handle
Insulation According to ASTM F-1505-01, New VDE Specification 0682/part 201 and EN/IEC 60900, NFPA70E, up to 1000 Volt.
Individually Tested. Blade high alloy chrome-vanadium-molybdenum steel, hardened, black finish. Insulation molded directly onto blade.
Wiha-SoftFinish® handle, multi-component, cushion grip.

Item								
No.	mm	Inch	mm	Inch	mm	Inch	lbs.	pkg.
320 05	2.0	.078	60	2.4	164	6.5	.05	10
320 10	2.5	.098	75	3.0	179	7.1	.06	10
320 12	3.0	.118	100	3.9	204	8.0	.07	10
320 15	3.5	.139	100	3.9	204	8.0	.07	10
320 17	4.0	.157	100	3.9	211	8.3	.12	10
320 23	4.5	.177	100	3.9	211	8.3	.12	10
320 24	4.5	.177	125	5.0	236	9.3	.12	10
320 27	4.5	.177	150	5.9	261	10.2	.14	10
320 25	4.5	.177	175	7.0	286	11.2	.13	10
320 28	4.5	.177	200	8.0	311	12.3	.15	10
320 31	5.5	.216	125	5.0	243	9.5	.15	10
320 26	5.5	.216	175	7.0	293	11.5	.21	10
320 34	6.0	.236	150	5.9	268	10.6	.21	10
320 39	6.5	.255	150	5.9	268	10.6	.21	10
320 42	8.0	.315	175	7.0	299	11.8	.34	10
320 45	10.0	.393	200	8.0	318	12.5	.39	10

Warning!

Insulated tools are not intended for use on live or energized circuits. Always disconnect and de-energize all equipment & circuits. **NEVER!** work on live or energized circuits or equipment.


Use & Care Guide For Insulated Tools:

Store tools to minimize risk of damage to insulation
Inspect insulation prior to each use of any insulated tool
If you doubt the integrity of the insulation destroy the tool or have it retested
Use insulated tools where the ambient temperature is between -20 to +70° C
Have a qualified safety technician inspect and re-certify tools annually for safe use



321 Phillips Screwdriver, With Wiha-SoftFinish® Handle
Insulation According to ASTM F-1505-01, New VDE Specification 0682/part 201 and EN/IEC 60900, NFPA70E, up to 1000 Volt.
Individually Tested. Blade high alloy chrome-vanadium-molybdenum steel, hardened, black finish. Insulation molded directly onto blade.
Wiha-SoftFinish® handle, multi-component, cushion grip.

Item							
No.	Size	mm	Inch	mm	Inch	lbs.	pkg.
321 00	0	60	2.4	164	6.5	.06	10
321 01	1	80	3.1	191	7.5	.12	10
321 02	2	100	3.9	218	8.6	.20	10
321 03	3	150	5.9	268	10.6	.34	10
321 04	4	200	8.0	318	12.5	.39	10

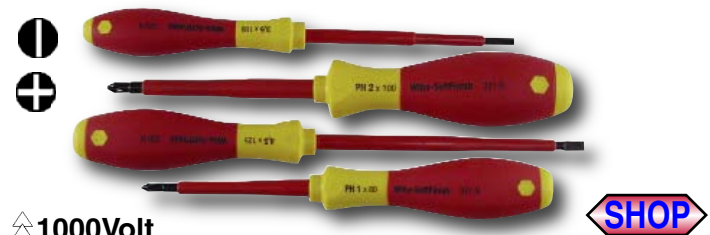

320 90 Set 4 Pcs. Slotted & Phillips

Item						
No.	mm	mm	mm	Size	mm	.76 lbs.
320 90	320 15	3.5	100	0.6	321 01	1 80
	320 24	4.5	125	1.0	321 02	2 100