



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



# AI...GB

## Ferrules With Insulating Collar for Wires With Increased Insulation



### CLIPLINE

Data Sheet  
103083\_01\_en

© PHOENIX CONTACT - 09/2006

### Description

**AI...GB** ferrules enable practical crimping of wires with increased insulation. Due to the increased diameter of the insulating collar this type of ferrule is ideal for use with AWG cables.

The metal insulating sleeve is made from a soft electrolytic copper with tin plating, which ensures optimum connection when crimped with the appropriate Phoenix Contact tools.

The insulating collar made from polypropylene, which is resistant to extreme heat, insulates and simplifies fitting onto the wire without having to splice the individual litz wires.



Make sure you always use the latest documentation.  
It can be downloaded at [www.download.phoenixcontact.com](http://www.download.phoenixcontact.com).  
A conversion table is available on the Internet at  
[www.download.phoenixcontact.com/general/7000\\_en\\_00.pdf](http://www.download.phoenixcontact.com/general/7000_en_00.pdf).




This data sheet is valid for all products listed on the following page:

## Dimensions and Ordering Data

### Ferrules With Insulating Collar for Wires With Increased Insulation

Cross Section	$l_1$	$l_2$	$d_1$	$s_1$	$d_2$	$s_2$	Color	Type	Order No.	Pcs./Pck.
0.5 mm <sup>2</sup>	13.5 mm	8.0 mm	1.1 mm	0.15 mm	3.0 mm	0.3 mm	White	AI 0,5- 8 WH-GB	1208966	100
0.5 mm <sup>2</sup>	15.5 mm	10.0 mm	1.1 mm	0.15 mm	3.0 mm	0.3 mm	White	AI 0,5-10 WH-GB	3203150	100
0.75 mm <sup>2</sup>	14.0 mm	8.0 mm	1.3 mm	0.15 mm	3.4 mm	0.3 mm	Gray	AI 0,75- 8 GY-GB	1208979	100
0.75 mm <sup>2</sup>	16.0 mm	10.0 mm	1.3 mm	0.15 mm	3.4 mm	0.3 mm	Gray	AI 0,75-10 GY-GB	3203163	100
1 mm <sup>2</sup>	14.0 mm	8.0 mm	1.5 mm	0.15 mm	3.4 mm	0.3 mm	Red	AI 1-8 RD-GB	1208982	100
1 mm <sup>2</sup>	16.0 mm	10.0 mm	1.5 mm	0.15 mm	3.4 mm	0.3 mm	Red	AI 1-10 RD/1000 GB	1208869	1000
1.5 mm <sup>2</sup>	14.0 mm	8.0 mm	1.8 mm	0.15 mm	3.7 mm	0.3 mm	Black	AI 1,5-8 BK-GB-1000	3202892	1000
1.5 mm <sup>2</sup>	16.0 mm	10.0 mm	1.8 mm	0.15 mm	3.7 mm	0.3 mm	Black	AI 1,5-10 BK/1000 GB	1208872	1000

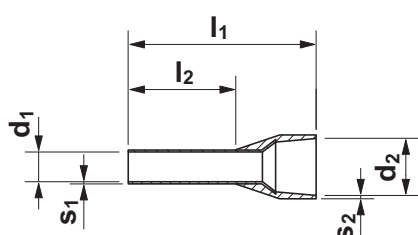

- $l_1$  = Total length
- $l_2$  = Sleeve length
- $d_1$  = Inside diameter of sleeve
- $s_1$  = Wall thickness of sleeve
- $d_2$  = Inside diameter of insulating collar
- $s_2$  = Wall thickness of insulating collar

Figure 1 Dimensions (tolerances according to DIN 46228-4)

## Technical Data

### General Data

Material

Collar

Sleeve

Polypropylene PP (UL94 HB), heat resistant up to 105°C

E-CU, tin-plated surface

© PHOENIX CONTACT 09/2006