

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

ALL RIGHTS RESERVED.

(C) COPYRIGHT - By -

LOC

G

DIST

02

REVISIONS

P

LTR

E3


DESCRIPTION

DATE

DWN

APVD

27MAR13 KH DR

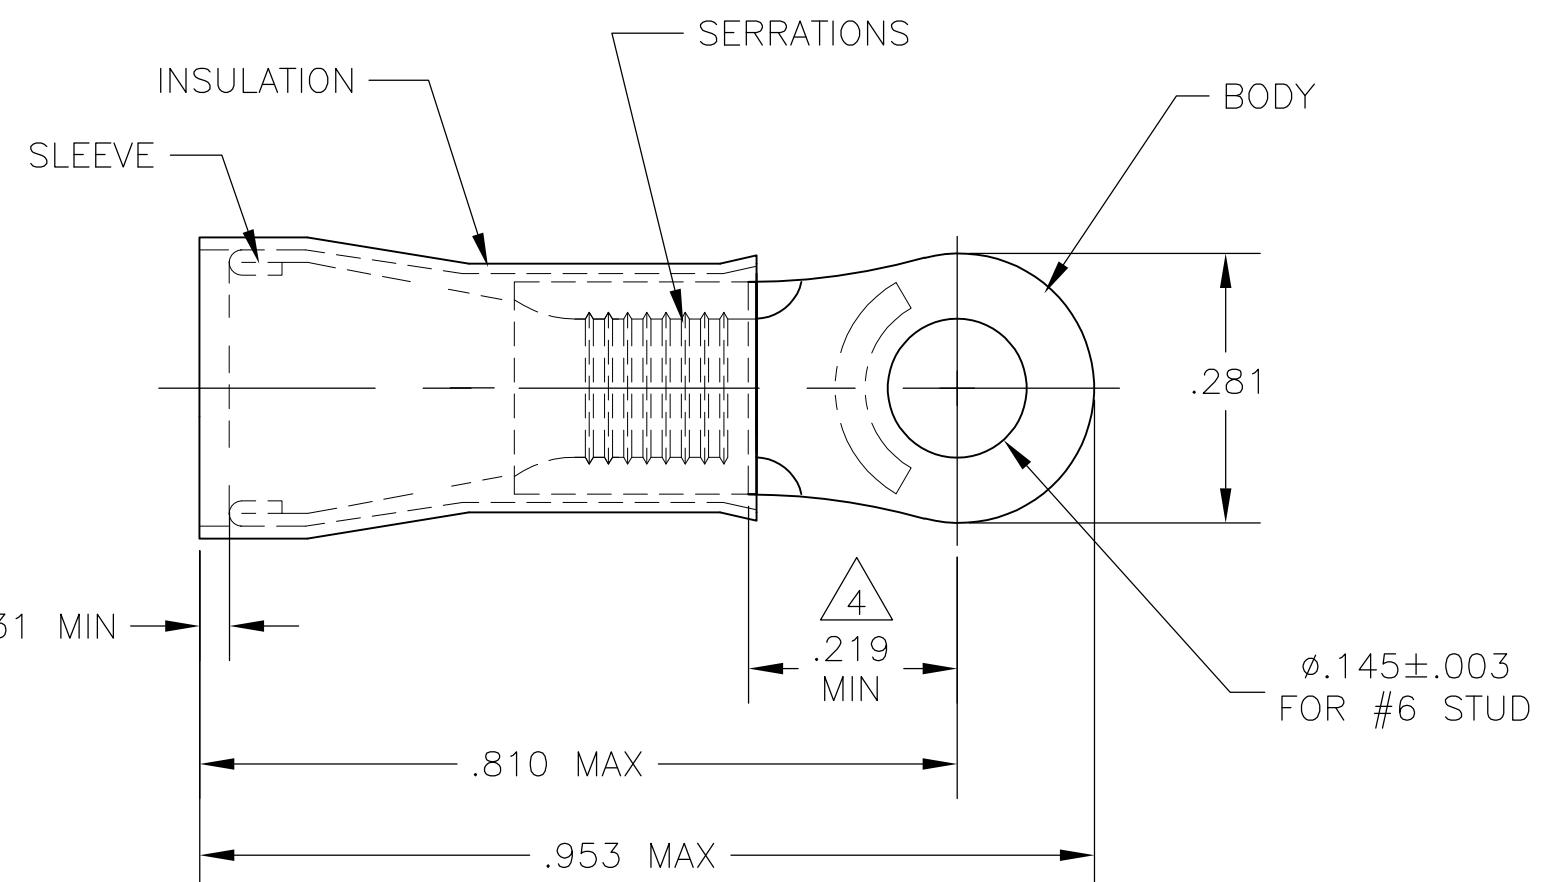

1 WIRE INSUL DIA .150-.230

2 MATERIAL: BODY - CU PER ASTM B152
SLEEVE - CU PER ASTM B152
INSULATION - NYLON ASTM D4066,
TYPE 1

3 FINISH: BODY & SLEEVE: TIN PER ASTM B-545
INSULATION - COLOR: YELLOW

4 APPLIES FROM THE EDGE OF METAL BARREL
TO THE CENTER OF THE STUD HOLE.

5 TONGUE MATERIAL THICKNESS: .040±.002

AMP WIRE RANGE	UL Listed FILE E13288	LR7189 Certified
12-10 AWG SOLID OR STRANDED	12-10 AWG SOLID OR STRANDED	12-10 AWG SOLID OR STRANDED

50	LOOSE PIECE, BOX	8-320634-2
2000	ON TAPE	2-320634-1
500	LOOSE PIECE	320634
QTY	PACKAGE TYPE	PART NO

MAX RECOMMENDED OPERATING TEMPERATURE: 105°C [221°F]	THIS DRAWING IS A CONTROLLED DOCUMENT.			12JUN09 jr ruth	12JUN09 TOM MICIELUTTI	12JUN09 TOM MICIELUTTI	PRODUCT SPEC UL 486A	APPLICATION SPEC —	NAME TERMINAL, PIDG, RING TONGUE, WIRE SIZE: 12-10
	DIMENSIONS: INCHES	TOLERANCES UNLESS OTHERWISE SPECIFIED:							
VOLTAGE RATING: 300 V MAX				0 PLC 1 PLC 2 PLC 3 PLC 4 PLC ANGLES	± - ± - ± - ± .008 ± - ± 5°				
CIRCULAR MIL AREA: 2.62-6.64mm ² [5,180-13,100] SOLID OR STRANDED	MATERIAL 2	FINISH 3				WEIGHT —			
						CUSTOMER DRAWING	SIZE A3	CAGE CODE 00779	DRAWING NO C-320634
							RESTRICTED TO —		
							SCALE 5:1	SHEET 1 OF 1	REV E3