



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



Fuse plug - P-FU 5X20 LED 250-5 - 3209264

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Fuse plug, Nominal current: 6.3 A, Width: 5.2 mm, Fuse type: G / 5 x 20, Fuse type: Glass, Mounting type: Plug-in mounting, Color: black

Product Features

- Large-surface labeling option
- Test contacts on both sides of the fuse
- Versions with bipolar defect indicator
- Can be used for overload/short-circuit protection



Key Commercial Data

Packing unit	1 pc
Minimum order quantity	10 pc
Weight per Piece (excluding packing)	5.29 g
Custom tariff number	85369085
Country of origin	China

Technical data

General

Note	Prior to replacing the cartridge fuse, disconnect the fuse connector from the basic terminal block.
Number of levels	1
Color	black
Insulating material	PA
Flammability rating according to UL 94	V0

Dimensions

Width	5.2 mm
Length	23.5 mm

Fuse plug - P-FU 5X20 LED 250-5 - 3209264

Technical data

General

Fuse	G / 5 x 20
Fuse type	Glass
Pollution degree	3
Maximum power dissipation	1.6 W (Short-circuit and overload protection)
LED voltage range	110 V AC/DC ... 250 V AC/DC
LED current range	0.4 mA ... 0.95 mA
Maximum load current	6.3 A (the current is determined by the fuse used)
Nominal current I _N	6.3 A (the current is determined by the fuse used)
Open side panel	nein

Standards and Regulations

Connection in acc. with standard	CSA
Flammability rating according to UL 94	V0

Classifications

eCl@ss

eCl@ss 4.0	27142001
eCl@ss 4.1	27142001
eCl@ss 5.0	27142001
eCl@ss 5.1	27142001
eCl@ss 6.0	27141149
eCl@ss 7.0	27141149
eCl@ss 8.0	27142001

ETIM

ETIM 4.0	EC002018
ETIM 5.0	EC000036

UNSPSC

UNSPSC 6.01	30211811
UNSPSC 7.0901	39121409
UNSPSC 11	39121409
UNSPSC 12.01	39121409
UNSPSC 13.2	39121409

Approvals

Approvals

Fuse plug - P-FU 5X20 LED 250-5 - 3209264

Approvals

Approvals

UL Recognized / cUL Recognized / CSA / EAC / cULus Recognized

Ex Approvals

Approvals submitted

Approval details

UL Recognized	
Nominal current IN	10 A
Nominal voltage UN	250 V

cUL Recognized	
Nominal current IN	10 A
Nominal voltage UN	250 V

CSA	
Nominal current IN	10 A
Nominal voltage UN	250 V


EAC

cULus Recognized


Fuse plug - P-FU 5X20 LED 250-5 - 3209264

Drawings

Application drawing

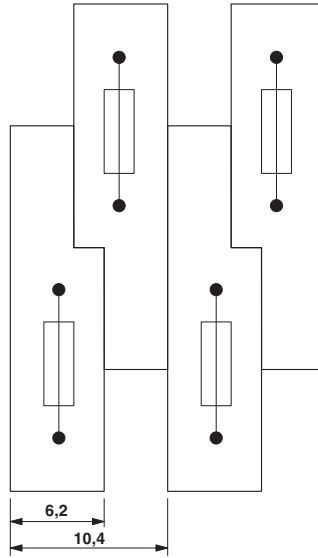


Application drawing

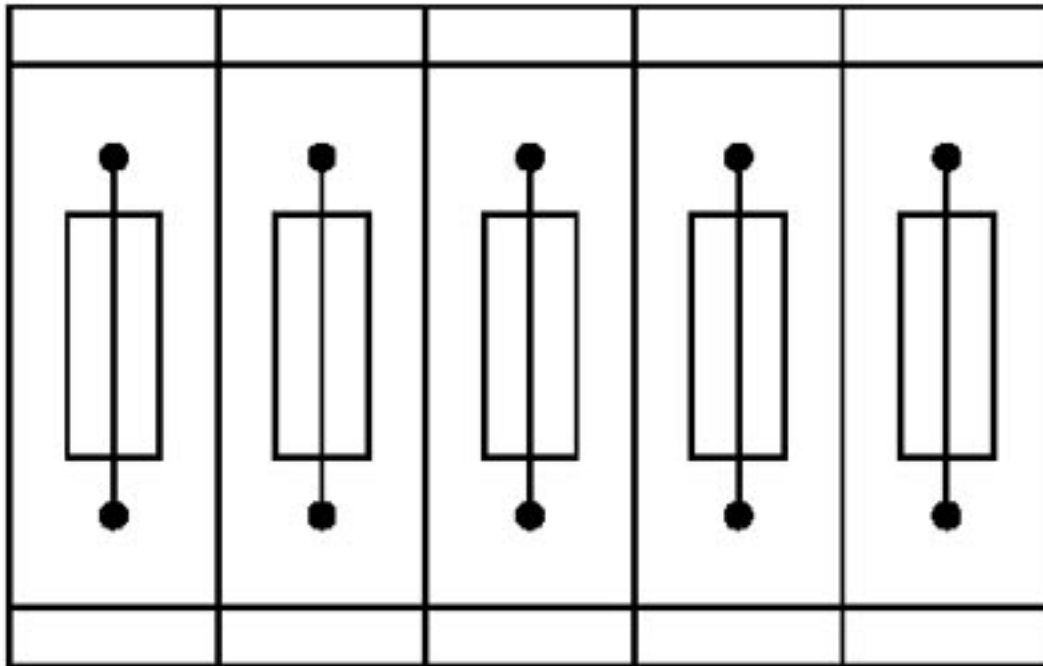

Fuse terminal blocks in interconnected arrangement, block consisting of 5 fuse terminal blocks

Fuse plug - P-FU 5X20 LED 250-5 - 3209264

Application drawing

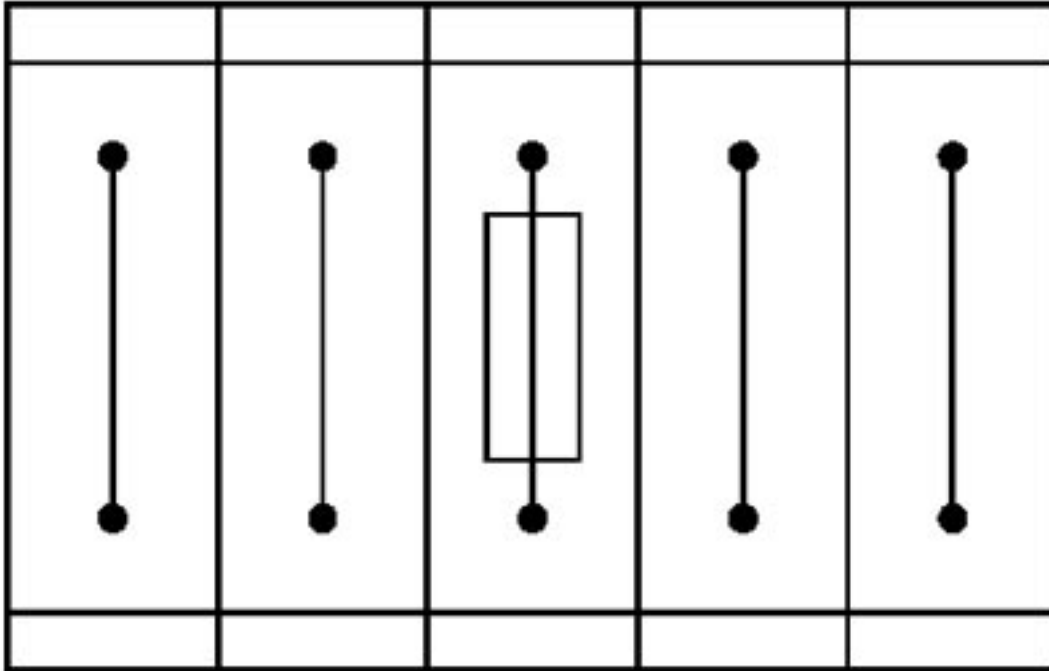

Fuse terminal block in single arrangement,
block consisting of one fuse terminal block and 4 feed-through terminal blocks