



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China





Heat Shrinkable Tubing up to 3,5:1 - 1 m lengths

TREDUX HA47 thick wall - with adhesive liner

The toughness and the weatherability of TREDUX thick wall tubing makes it suitable for exposed applications and underground cable joints.

Features and Benefits

- Thick walled polyolefin adhesive-lined tubing
- Standard 1m lengths
- Securely packed in display carton for use in smaller quantities
- For low and medium voltage power applications



TREDUX HA47 - application below ground.




Detailed Information about Heatguns please refer to page 529.



One Step to the Web!

MATERIAL	Polyolefin, cross-linked (PO-X)
Shrink Ratio	up to 3.5:1
Operating Temperature	-55 °C to +110 °C
Minimum Shrink Temperature	+120 °C
Softening Point Adhesive	+85 °C
Longitudinal change after shrinkage	-10 % max.
Dielectric Strength	20 kV/mm
Flammability	not flame retarded

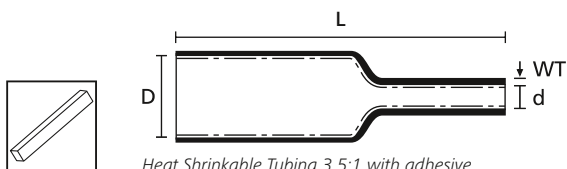

TYPE	Supplied Ø D min.	Recov. Ø d max.	Wall (WT)	Length (L)	Pack Cont.	Colour	Article-No.
TREDUX-HA47-19/6	19.0	6.0	2.70	1.0 m	10 pcs.	Black (BK)	321-50190
TREDUX-HA47-33/8	33.0	8.0	3.20	1.0 m	5 pcs.	Black (BK)	321-50330
TREDUX-HA47-45/12	45.0	12.0	4.10	1.0 m	4 pcs.	Black (BK)	321-50450
TREDUX-HA47-51/16	51.0	16.0	4.10	1.0 m	2 pcs.	Black (BK)	321-50510
TREDUX-HA47-68/22	68.0	22.0	4.10	1.0 m	1 pcs.	Black (BK)	321-50680
TREDUX-HA47-85/25	85.0	25.4	4.30	1.0 m	1 pcs.	Black (BK)	321-50850

All dimensions in mm. Subject to technical changes.
Minimum Order Quantity (MOQ) may differ from package content.