



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com


Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

| LOC | DIST | REVISIONS | | | |
|-----|------|-------------|-----------------------|---------|----------|
| P | LTR | DESCRIPTION | DATE | DWN | APVD |
| G | 02 | G1 | REV PER ECR 07-016668 | 20JUL07 | JR TM |

- ① WIRE INSULATION DIA IS 3.81-6.35 [.150-.250]
- ② OVALED WIRE INSULATION DIA IS 8.00 MAX x 4.19 MAX, [.315 MAX x .165 MAX].
- ③ MATERIAL: BODY - CU PER ASTM B152
SLEEVE - PVC, COLOR - YELLOW
- ④ FINISH: BODY - TIN PLATE PER ASTM B-545

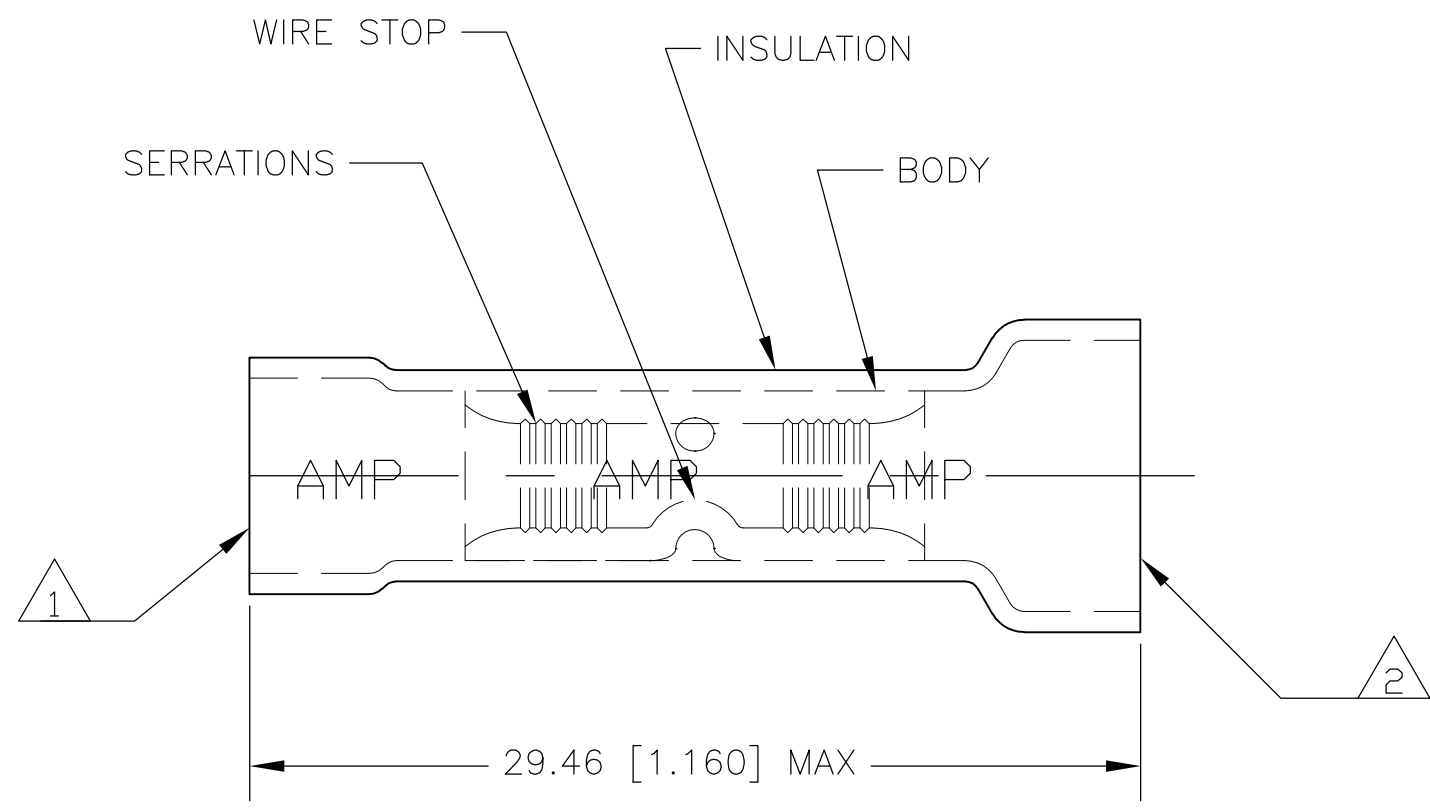

AMP
WIRE RANGE

12-10 AWG
SOLID OR STRANDED

| | | |
|-----|--------------|---------|
| 500 | LOOSE PIECE | 321286 |
| QTY | PACKAGE TYPE | PART NO |

| | | | | | | | |
|--|--|---|--|--|---------------------------------|---|--------------------|
| AMP INCORPORATED CUSTOMER SERVICE SYSTEMS | | MAX RECOMMENDED OPERATING TEMPERATURE: 90°C [194°F] | THIS DRAWING IS A CONTROLLED DOCUMENT. | | DWN jr_ruth 20JULY07 | Tyco Electronics Corporation Harrisburg, PA 17105-3608 | |
| FOR ADDITIONAL PRODUCT INFORMATION OR COPIES OF DRAWINGS AND TECHNICAL DOCUMENTS | PRODUCT INFORMATION CENTER 1-800-522-6752 | VOLTAGE RATING: 600V MAX (1000V FIXTURE OR SIGN) | DIMENSIONS: MM [INCHES] | TOLERANCES UNLESS OTHERWISE SPECIFIED: | CHK T MICHELUTTI 20JUL07 | NAME SPLICE, BUTT, PLASTIC GRIP, 12-10 AWG | |
| FOR APPLICATION TOOLING INFORMATION | TOOLING ASSISTANCE CENTER 1-800-722-1111 | CIRCULAR MIL AREA: 2.62-6.64mm² [5,180-13,100] SOLID OR STRANDED | | 0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± - 4 PLC ± - ANGLES ± 5° | APVD T MICHELUTTI 20JUL07 | APPLICATION SPEC | SIZE A3 |
| FOR ORDER ENTRY | 1-800-526-5142 | THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED. IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION. | MATERIAL - ③ | FINISH - ④ | PRODUCT SPEC | WEIGHT - | CAGE CODE 00779 |
| | | | | | DRAWING NO G-321286 | | RESTRICTED TO - |
| | | | | | CUSTOMER DRAWING | | SCALE 4:1 |
| | | | | | | | SHEET 1 OF 1 |
| | | | | | | | REV G1 |