

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China








PRODUCT DATA DRAWING

REVISION HISTORY			
REV	DESCRIPTION	DATE	APPROVED
-	REL. NRN 33880	11/20/06	STW

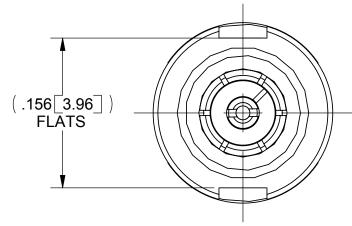



MATERIAL:

BODY & CONTACT: BERYLLIUM COPPER PER ASTM B196,

ALLOY No. UNS C17300, TD04.

INSERT, WASHER

& JAM NUT: BRASS PER ASTM B16, ALLOY No. UNS C36000.

LOCK WASHER: PHOSPHOR BRONZE PER ASTM B103

PTFE PER ASTM D1710, TYPE I, GRADE 1, CLASS B **INSULATOR:**

FINISH:

BODY, INSERT

& CONTACT: GOLD PER ASTM B488, TYPE II.

CODE C, CLASS 1.27; OVER NICKEL PER AMS-QQ-N-290, CLASS 1, .00005" MIN.

JAM NUT &

LOCKWASHER: NICKEL PLATE PER AMS-QQ-N-290, CLASS 2, .000050 MIN THICK

PERFORMANCE:


IMPEDANCE: 50 OHMS

FREQ. RANGE: DC TO 65.0 GHz

DWV:

325 VRMS

OPERATING TEMP.: -55°C TO +125°C

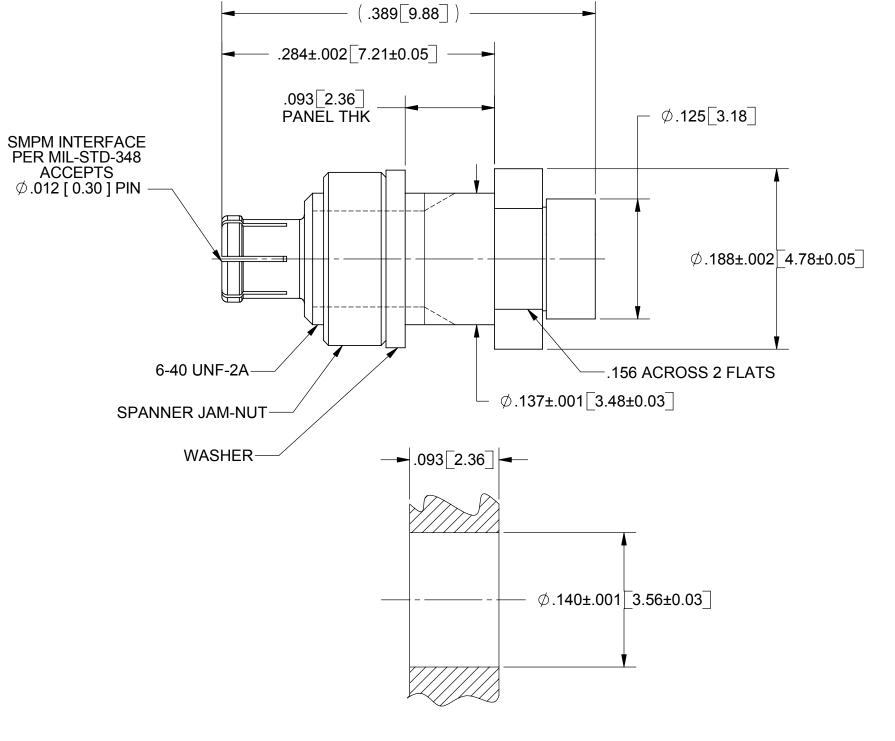

RECOMMENDED MOUNTING HOLE

k	<i>(</i>			
ľ	MATERIAL: SEE NO	OTES	DIMENSIONS ARE IN INCHES TOLERANCES	
	FINISH: SEE NO	TES	FRACTIONAL: ±1/64 ANGULAR: X° ±1°0 X°X' ±15' DECIMAL: .X ±.030 .XX +.010	
SURFACE AREA: N/A			.XXX ±005 INTERPRET DIMENSIONS AND TOLERANCES PER ASME Y14.5M - 1994	
PROPRIETARY		RY		
	THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SV MICROWAVE, INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF SV MICROWAVE, INC IS PROHIBITED.		THIRD ANGLE PROJECTION	
			+	

1) ALL DIMENSIONS ARE IN INCHES [MILLIMETERS]
2) ALL DIMENSIONS ARE AFTER PLATING.
3) BREAK CORNERS & EDGES 005 R. MAX.
4) CHAM. 1ST & LAST THREADS.
5) SURFACE ROUGHNESS 63-MIL-STD-10.
6) DIA: S ON COMMON CENTERS TO BE CONCENTRIC WITHIN. 005 T.I.R.
7) REMOVE ALL BURRS

UNLESS OTHERWISE SPECIFIED

DRAWN: JMC 11/02/06 CHECKED: JM 11/02/06 JM 11/02/06 APPROVED:

SV Microwave, Inc.

2400 Centrepark West Drive, Suite 100 West Palm Beach, FL 33409

SMPM FEMALE BULKHEAD MT. FOR T-FLEX 405 CABLE

SIZE CAGE CODE DWG. NO. 3221-4000 B 95077 SCALE: 10:1

SHEET 1 OF 1