



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832


Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION ,19 .  
 © COPYRIGHT 19 BY AMP INCORPORATED. ALL RIGHTS RESERVED.

| LOC |     | DIST        |                          | REVISIONS |       |  |  |
|-----|-----|-------------|--------------------------|-----------|-------|--|--|
| P   | LTR | DESCRIPTION | DATE                     | DWN       | APVD  |  |  |
| G   | 14  | E           | REDRAWN PER 0720-0377-94 | 25OCT94   | LO ME |  |  |

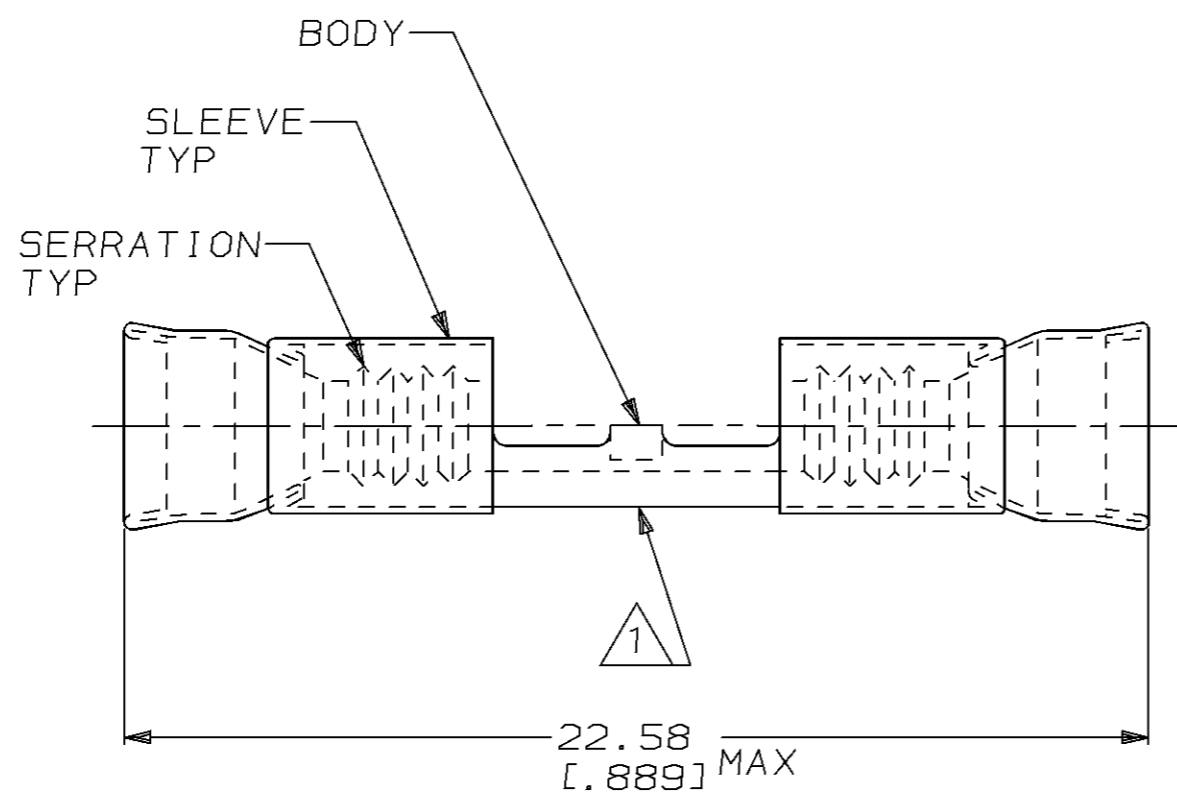

- ① STAMP AMP 22-18 APPROX AS SHOWN  
 22-16 TERMINALS ARE STAMPED 22-18 IN  
 ACCORDANCE WITH MILITARY SPEC MIL-T-7928  
 COMMERCIAL WIRE RANGE IS 22-16
- 2. WIRE INSUL DIA, 2.67-3.56 [.105-.140]
- 3. TONGUE MATL THK, 0.79±0.05 [.031±.002]

|      |              |         |
|------|--------------|---------|
| 1000 | LOOSE PIECE  | 322823  |
| QTY  | PACKAGE TYPE | PART NO |

|  |  |   |  |  |   |   |
|--|--|---|--|--|---|---|
| AMP INCORPORATED<br>CUSTOMER SERVICE SYSTEM                                      |  | MAX RECOMMENDED OPERATING TEMPERATURE:<br>343°C [650°F] | THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED.<br>IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION. |  | DWN<br>L OLMEDA<br>25OCT94  | AMP Incorporated<br>Harrisburg, PA 17105-3608 |
| FOR ADDITIONAL PRODUCT INFORMATION OR COPIES OF DRAWINGS AND TECHNICAL DOCUMENTS | PRODUCT INFORMATION CENTER<br>1-800-522-6752 |   | DIMENSIONS:<br>mm [in]   | TOLERANCES UNLESS OTHERWISE SPECIFIED: | CHK<br>M ELLIS<br>25OCT94   |   |
| FOR APPLICATION TOOLING INFORMATION  | TOOLING ASSISTANCE CENTER<br>1-800-722-1111  | VOLTAGE RATING:<br>-                                    |  | 0 PLC ±-                               | NAME<br>WIRE SPLICE, STRATOTHERM<br>DIAMOND GRIP, WIRE SIZE,<br>22-16 AWG |   |
| FOR ORDER ENTRY  | 1-800-526-5142                               | CIRCULAR MIL AREA:<br>0.26mm² - 1.65mm² [509-3260]      |  | 1 PLC ±-                               |   | 2 PLC ±0.20 [.008]                            |
|  |  | STRANDED WIRE   | MATERIAL<br>BODY, CU PER ASTM B152   | 3 PLC ±-                               | APVD<br>S BORTNER<br>25OCT94  | APPLICATION SPEC                              |
|  |  |   | SLEEVE, NI SIL PER ASTM B122   | 4 PLC ±-                               | PRODUCT SPEC  |   |
|  |  |   |  | FINISH<br>BODY, NP, QQ-N-290           | WEIGHT  | SCALE<br>6:1                                  |
|  |  |   |  |  | CUSTOMER DRAWING  | DRAWING NO<br>G-322823                        |
|  |  |   |  |  |   | SHEET<br>1 OF 1                               |
|  |  |   |  |  |   | REV<br>E                                      |