

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us



Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: [info@chipsmall.com](mailto:info@chipsmall.com) Web: [www.chipsmall.com](http://www.chipsmall.com)

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China

THIS DRAWING IS UNPUBLISHED.  
RELEASED FOR PUBLICATION  
ALL RIGHTS RESERVED.  
© COPYRIGHT - By -

LOC G DIST 14  
P LTR  
C2 REVISED PER ECO-11-005027  
DATE 11MAR11 DWN RK HMR  
APVD

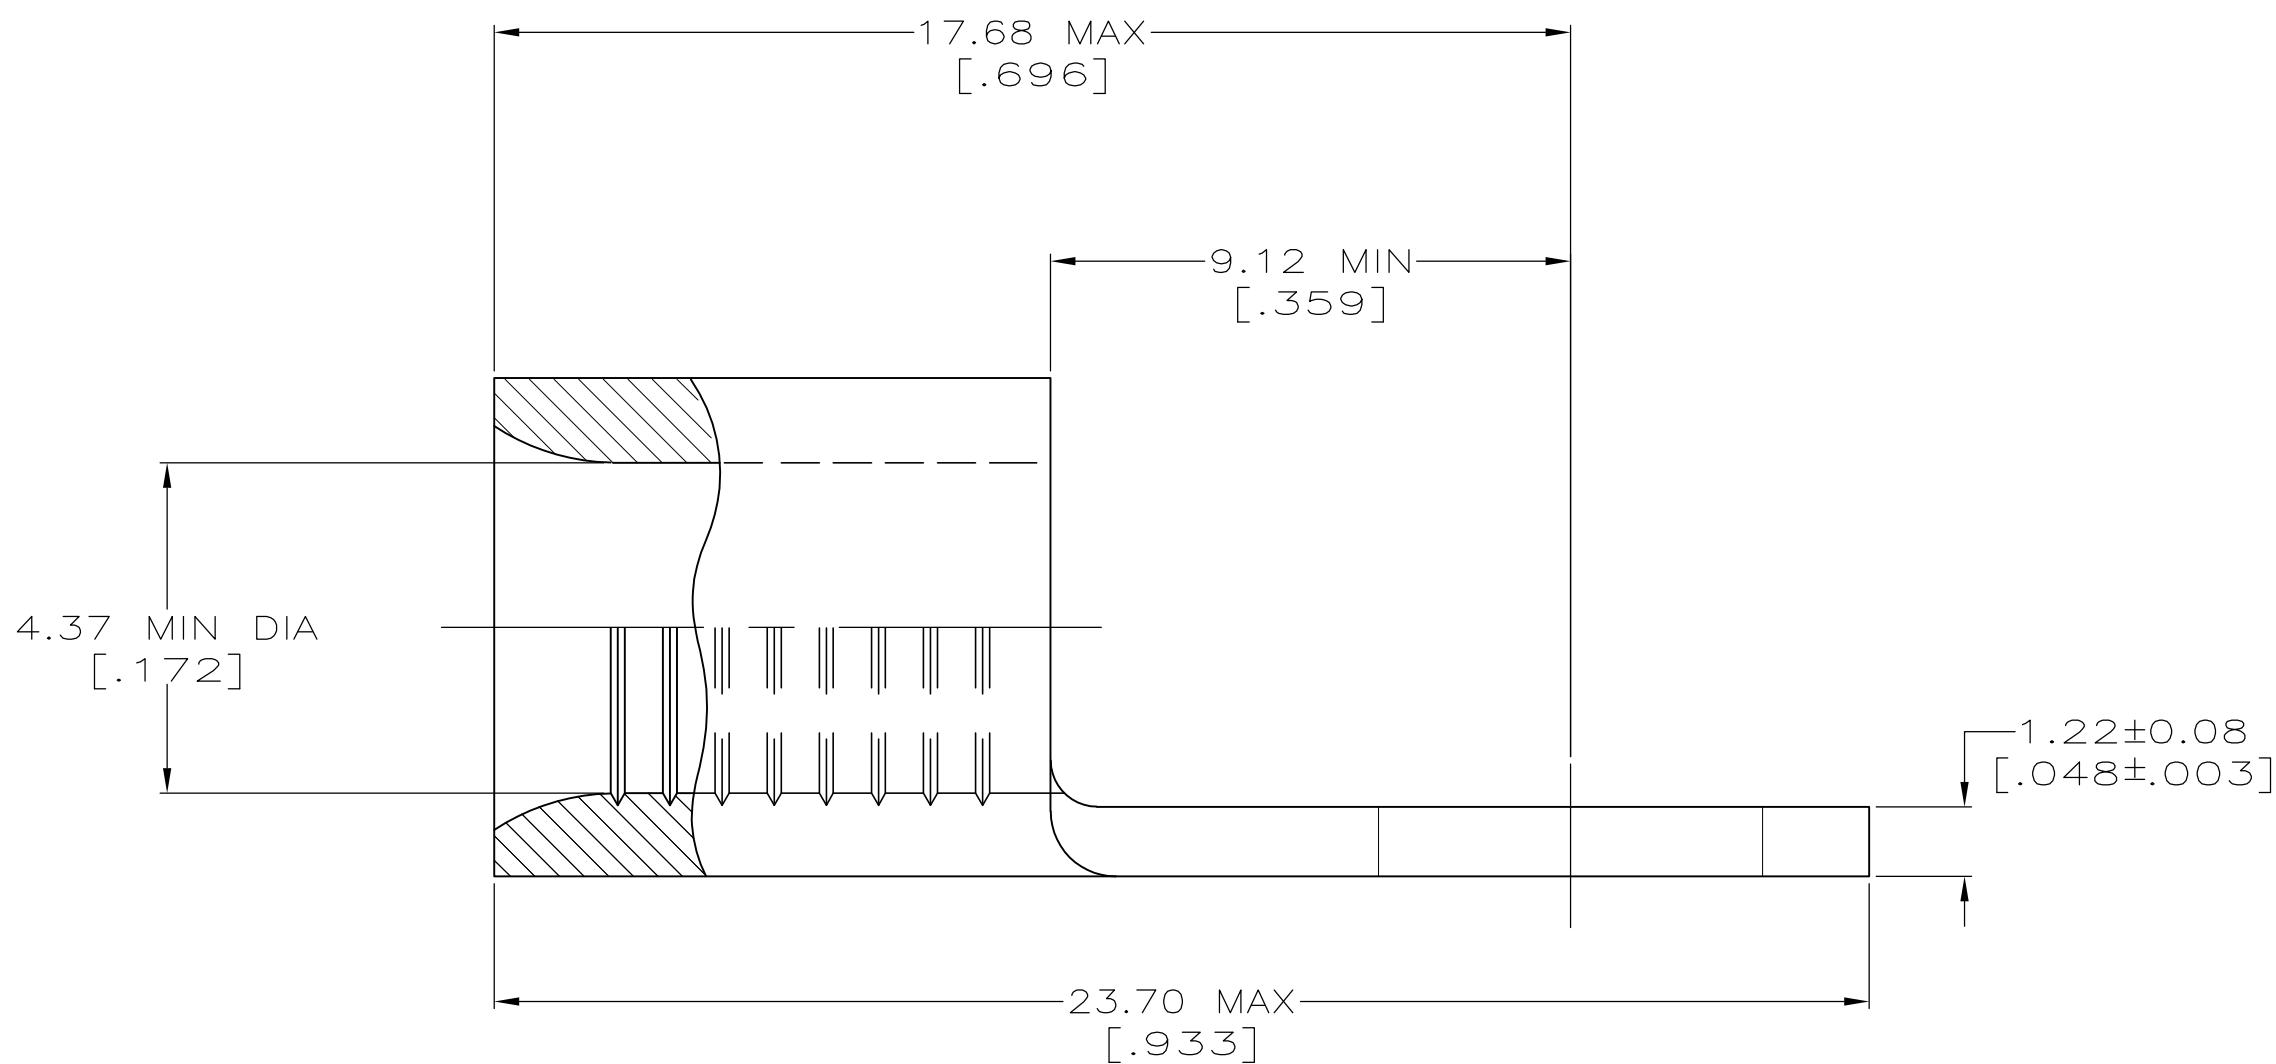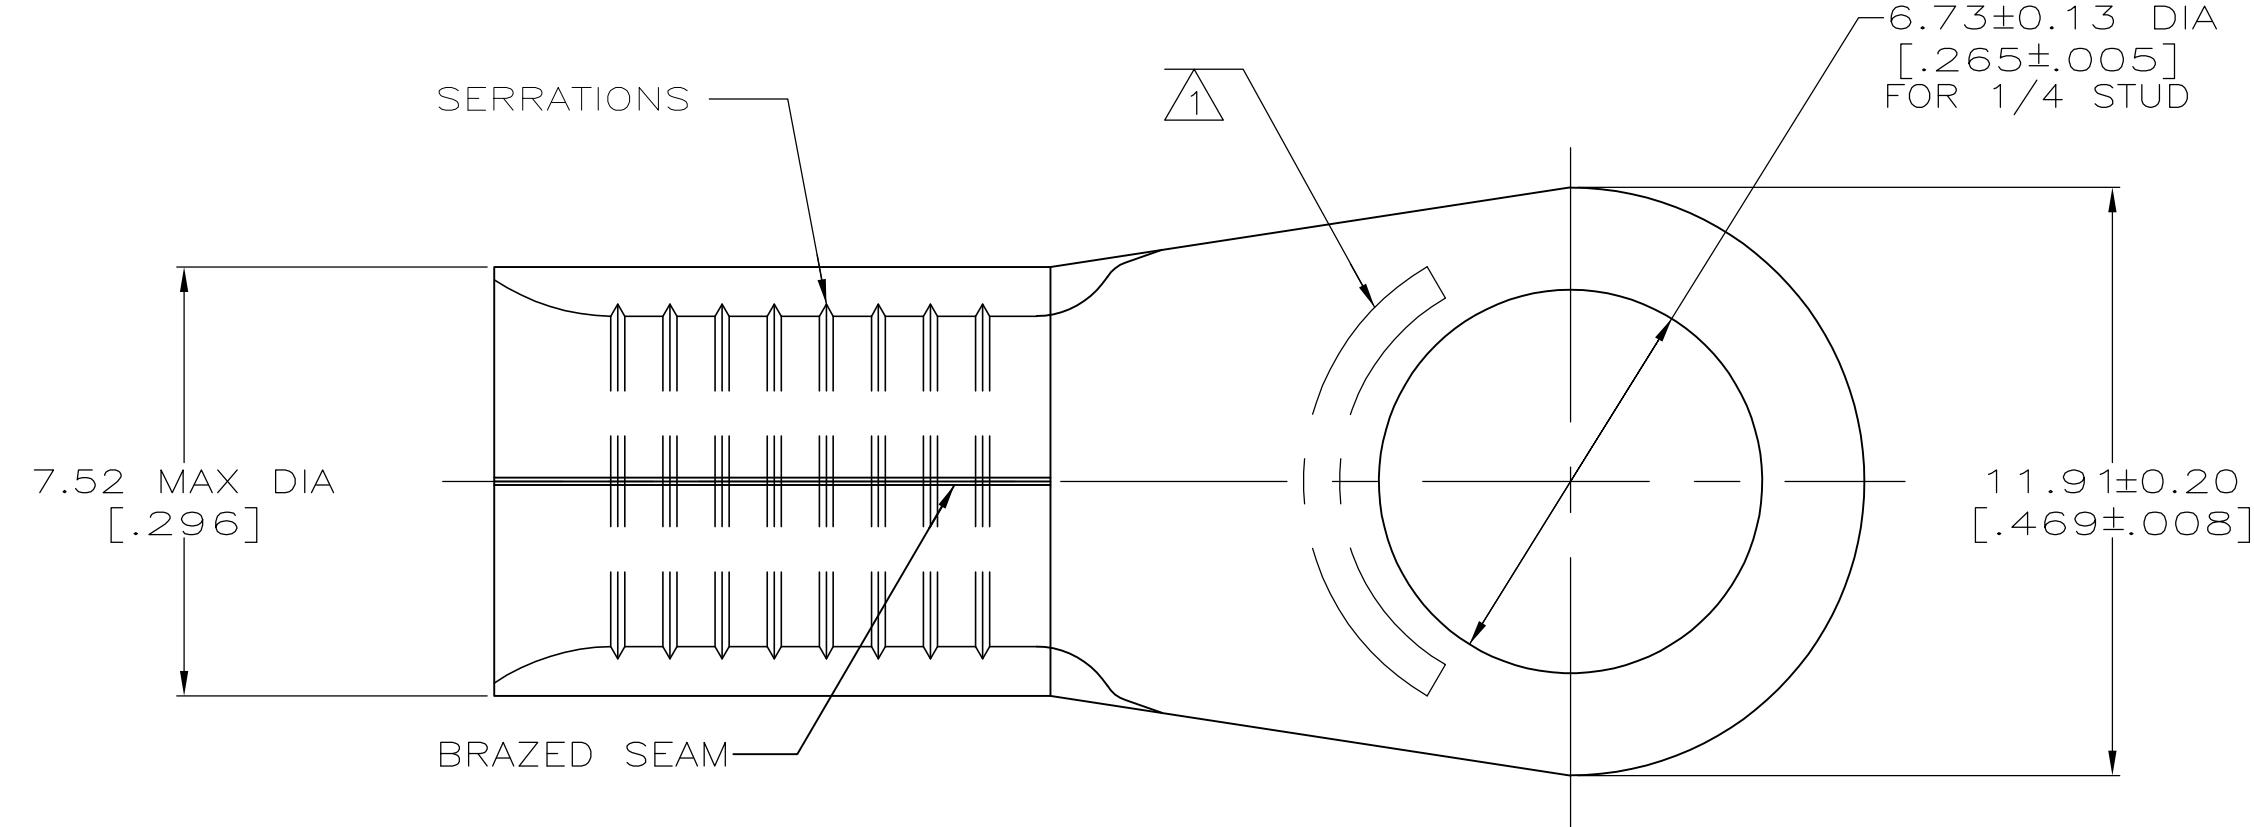

AMP  
WIRE RANGE  
8 AWG  
SOLID OR STRANDED

- 1 STAMP AMP 8\* APPROX AS SHOWN
- 2 COPPER PER ASTM B-152, ANNEALED
- 3 NICKEL PLATE 0.00762 [.000300] MIN THK PER QQ-N-290

323166

PART NO.

MAX RECOMMENDED OPERATING TEMPERATURE: 343°C MAX		THIS DRAWING IS A CONTROLLED DOCUMENT.		4-19-93	
VOLTAGE RATING: N/A		TOLERANCES UNLESS OTHERWISE SPECIFIED:		4-19-93	
DIMENSIONS: mm [INCHES]	0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± - 4 PLC ± -	APVD JL MECKLEY PRODUCT SPEC	DA PATTERSON — APPLICATION SPEC	TA BRINKMAN CHK JL MECKLEY APVD	TE Connectivity
CIRCULAR MIL AREA: 6.64-10.5mm² [13,100-20,800] SOLID OR STRANDED	ANGLES ± -	FINISH	WEIGHT —	NAME TERMINAL, RING TONGUE, HEAT RESISTANT, STRATO-THERM	RESTRICTED TO
MATERIAL	- □ 2	- □ 3	CUSTOMER DRAWING	A2 00779 C-323166	—