

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com


Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China

Wiha Insulated Pliers & Cutters

Insulation Standards:

EN/IEC 60900, ASTM F-1505-01 and
According to VDE 0682/part 201, NFPA70E

Chrome finish for long
lasting corrosion
protection

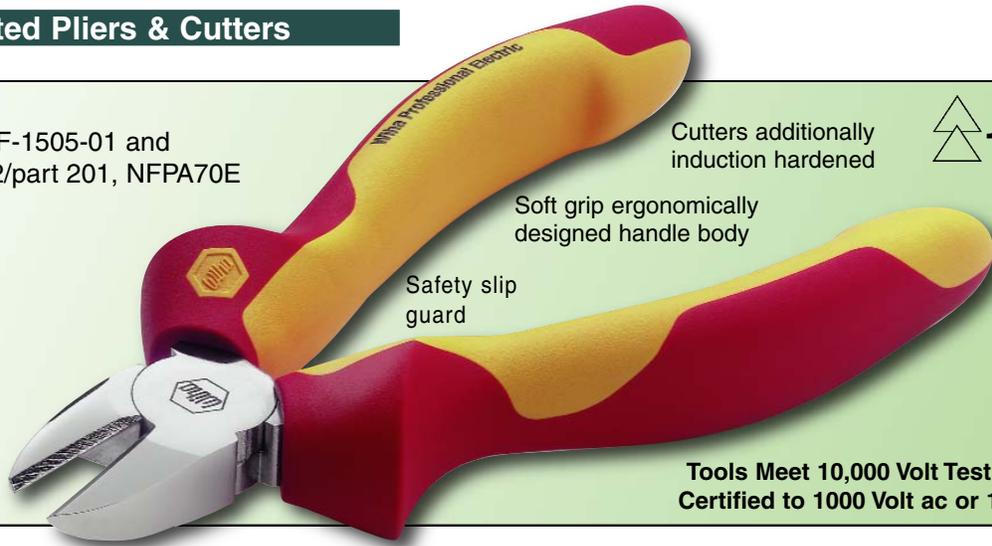

Cutters additionally
induction hardened

1000V

Soft grip ergonomically
designed handle body

Safety slip
guard

Tools Meet 10,000 Volt Test Standards
Certified to 1000 Volt ac or 1500 Volt dc

Insulated Combination Lineman's Pliers



1000volt

[SHOP](#)

328 Combination Pliers. Insulation According to VDE 0682/part 201, EN/IEC 60900, ASTM F-1505-01, NFPA70E, up to 1000 volt. Individually Tested. DIN ISO 5746 Extra long cutting edge for flat & round cables. Serrated jaws. Cutting edges additionally induction hardened to approx. 60HRC. Special CV tool steel forgings, Chrome finish. Use for gripping and holding as well as cutting soft and hard wires and cables. Two component soft grip ergonomic handles.

Item No.		↔	↔	Cutting Capacity Copper AWG	🔌	🔌
		mm	Inch		Pkg.	wt.
328 14	Z01016006	160	6.3	#10	1	.53
328 16	Z01018006	180	7.0	#9	1	.58
328 18	Z01020006	200	8.0	#8	1	.72

Insulated High Leverage Combination Pliers

Lineman's



1000volt

With Lower Serrated Pulling Jaws

[SHOP](#)

328 High Leverage Combination Pliers. Insulation According to EN/IEC 60900, ASTM F-1505-01, NFPA70E, up to 1000 volt. Individually Tested. DIN ISO 5746

Extra long cutting edge for flat and round cables. Serrated upper jaws and lower pulling jaws. Cutting edges additionally induction hardened to approx. 64HRC. C 60 Special tool steel. Use for gripping, pulling & holding as well as cutting wires and cables ranging in hardness from soft to extremely hard. Two component soft grip ergonomic handles.

Item No.		↔	↔	Cutting Capacity Copper AWG	🔌	🔌
		mm	Inch		Pkg.	wt.
328 20	Z02022506	225	9.0	#4	1	.79

Insulated Diagonal Cutters



1000volt

[SHOP](#)

Use & Care Guide For Insulated Tools:

Store tools to minimize risk of damage to insulation
Inspect insulation prior to each use of any insulated tool
If you doubt the integrity of the insulation destroy the tool or have it retested
Use insulated tools where the ambient temperature is between -20 to +70° C
Have a qualified safety technician inspect and re-certify tools annually for safe use

328 Diagonal Cutters. Insulation According to VDE 0682/part 201, EN/IEC 60900, ASTM F-1505-01, NFPA70E, up to 1000 volt. Individually Tested. DIN ISO 5749

Low wear lap joint, riveted and able to withstand high levels of load. Lightweight action, clean cutting. Long term cutting is achieved through additional inductive hardening to approx. 60 HRC. Special tool steel hardened and tempered. For soft & medium hard wire. 32832 & 32834 for soft, hard & piano wire.

Item No.		↔	↔	Cutting Capacity Copper AWG	🔌	🔌
		mm	Inch		Pkg.	wt.
328 30	Z12014006	140	5.5	#6	1	.47
328 32	Z12016006	160	6.3	#6	1	.49
328 34	Z12018006	180	7.0	#6	1	.62

Warning! Insulated tools are not intended for use on live or energized circuits. Always disconnect and de-energize all equipment & circuits. **NEVER!** work on live or energized circuits or equipment.