



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com


Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China





Platinum RTD Sensor – PT100 – 3 Wire 1 meter long

PRODUCT ID: 3290

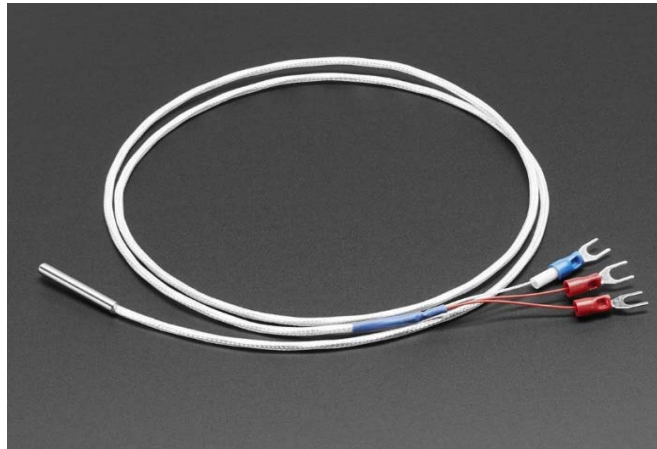

Description

For precision temperature sensing, nothing beats a Platinum RTD. Resistance temperature detectors (RTDs) are temperature sensors that contain a resistor that changes resistance value as its temperature changes, basically a kind of thermistor. In this sensor, the resistor is actually a small strip of Platinum with a resistance of 100 ohms at 0°C, thus the name PT100. Compared to most NTC/PTC thermistors, the PT type of RTD is much most stable and precise (but also more expensive) PT100's have been used for many years to measure temperature in laboratory and industrial processes, and have developed a reputation for accuracy (better than thermocouples), repeatability, and stability.

This high-temperature PT100 sensor is equipped with an stainless steel shield is good for up to 550°C.

PT100 features:

Based on resistance measurement principles

Resistor material is Platinum with a value of 100 ohm at temperature 0°C

Platinum has a positive resistance temperature factor; resistance increases with rising temperature

Resistance variation is a function of temperature: 0.385Ω/°C nominal

High accuracy and stability compared to thermocouples, silicon-based temperature sensors, or thermistors

Each sensor comes with *three wires*. Two of the wires connect to either side of the platinum resistor like you'd expect. The *third wire* is also connected to one end of the PT100. If your RTD amplifier supports 3-wire sensors, it will drive the resistor with the first two wires, and measure the voltage differences so that it can subtract any voltage drop from the wires. If your RTD amplifier only has 2-wire support simply leave the third wire disconnected.

Use our Adafruit RTD sensor breakout to connect this fine sensor to your favorite microcontroller

Technical Details

Cable specs:

Stainless steel tube: 4mm diameter by ~30mm long (size of stainless steel capsule may vary!)

Cable is approx 1m / 100cm long

Contains a PT100 temperature sensor

Three wires with terminal prong ends

PT100 technical specs:

Usable temperature range: -200 to 550°C (-328°F to +1,022°F)

Uses 3-wire interface

±0.5°C Accuracy from -10°C to +85°C

Product Weight: 19.3g / 0.7oz