

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China









Features:

- Choice of various viewing angles
- Available on tape and reel.
- Reliable and robust
- Pb free

Descriptions:

- The series is specially designed for applications requiring higher brightness
- The led lamps are available with different colors, intensities.

Applications :

- TV set
- Monitor
- Telephone
- Computer

Computer					
PART NO. Material		Emitted Color	Lens Color		
3294-15UYC/S400-A6	AlGaInP	Super Yellow	Water Clear		

3294-15UYC/S400-A6



EVERLIGHT ELECTRONICS CO.,LTD.

Device Number: CDLE-329-014

http://www.everlight.com

Prepared date: 2004/10/6

Rev.: 1

Page: 1 of 6


Prepared by:

LianXiang You



3294-15UYC/S400-A6

Package Dimensions



Notes: 1.All dimensions are in millimetres

- 2. An epoxy meniscus may extend about 1.5mm(0.059") down to the lead.
- 3. Tolerances unless Dimension ±0.25mm.

Absolute Maximum Ratings at $Ta = 25^{\circ}C$

Parameter	Symbol	Rating	Unit	
Forward Current	IF	50	mA	
Operating Temperature	Topr	-40 to +85	$^{\circ}\!\mathbb{C}$	
Storage Temperature	Tstg	-40 to +100	$^{\circ}\!\mathbb{C}$	
Soldering Temperature	Tsol	260 ± 5	$^{\circ}\!\mathbb{C}$	
Electrostatic Discharge	ESD	2000	V	
Power Dissipation	Pd	120	mW	
Peak Forward Current	IF(Peak)	200	mA	
Reverse Voltage	Vr	5	V	

Note: *1:IFP Conditions --Pulse Width \leq 1msec and Duty \leq 1/10.

*2:Soldering time \leq 5 seconds.

EVERLIGHT ELECTRONICS CO.,LTD. http://www.everlight.com Rev.: 1 Page: 2 of 6

Device Number: CDLE-329-014 Prepared date: 2004/10/6 Prepared by: LianXiang You



3294-15UYC/S400-A6

Electro-Optical Characteristics (Ta=25°C)

Parameter	Symbol	Condition		Min.	Тур.	Max.	Unit	
Forward Voltage	VF	IF=	20	mA	/	2.0	2.4	V
Reverse Current	Ir	V _R =	5	V	/	/	10	μ A
Luminous Intensity	Iv	IF=	20	mA	80	125	/	mcd
Viewing Angle	2 θ 1/2	IF=	20	mA	/	90	/	deg
Peak Wavelength	λр	IF=	20	mA	/	591	/	nm
Dominant Wavelength	λd	IF=	20	mA	/	589	/	nm
Spectrum Radiation Bandwidth	Δλ	IF=	20	mA	/	15		nm


EVERLIGHT ELECTRONICS CO.,LTD. http://www.everlight.com Rev.: 1 Page: 3 of 6

Device Number: CDLE-329-015 Prepared date: 2004/10/6 Prepared by: LianXiang You



3294-15UYC/S400-A6

■ Typical Electro-Optical Characteristic Curves:

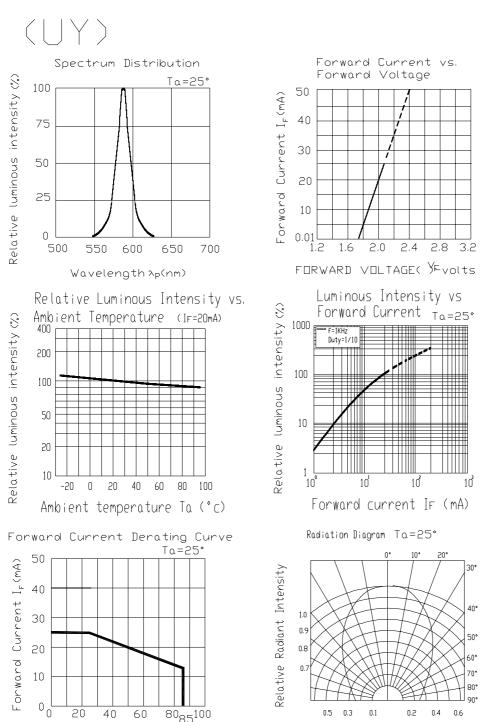

EVERLIGHT ELECTRONICS CO.,LTD. http://www.everlight.com Rev.: 1 Page: 4 of 6

Device Number: CDLE-329-014 Prepared date: 2004/10/6 Prepared by: LianXiang You

AMBIENT TEMPERATURE T_{α} (°C)

RADIATION DIAGRAM



3294-15UYC/S400-A6

■ Reliability test items and conditions:

NO	Item	n Test Conditions		Sample size	Ac/Re
1	Solder Heat	TEMP : 260°C ± 5 °C	10 SEC	76 PCS	0/1
2	Temperature Cycle	$H: +100^{\circ}C$ 15min \int 5 min $L: -40^{\circ}C$ 15min	300 CYCLES	76 PCS	0/1
3	Thermal Shock	$H: +100^{\circ}\mathbb{C}$ 5min $\int 10 \sec L: -10^{\circ}\mathbb{C}$ 5min	300 CYCLES	76 PCS	0/1
4	High Temperature Storage	TEMP : 100°C	1000 HRS	76 PCS	0/1
5	Low Temperature Storage	TEMP : -40°C	1000 HRS	76 PCS	0/1
6	DC Operating Life	TEMP : 25°C If = 20mA	1000 HRS	76 PCS	0/1
7	High Temperature / High Humidity	85℃ / 85% RH	1000 HRS	76 PCS	0/1

EVERLIGHT ELECTRONICS CO.,LTD. http://www.everlight.com Rev.: 1 Page: 5 of 6

Device Number: CDLE-329-014 Prepared date: 2004/10/6 Prepared by: LianXiang You



3294-15UYC/S400-A6

Packing Quantity Specification

- 1.1000PCS/1Bag, 4Bags/1Box
- 2.10Boxes/1Carton

Label Form Specification

EVERLIGHT

CPN:

3294-15UYC/S400-A6

QTY:

CAT: HUE: REF:

MADE IN TAIWAN

CPN: Customer's Production Number

P/N: Production Number

CAT: Ranks

HUE: Peak Wavelength

REF: Reference

LOT No: Lot Number

MADE IN TAIWAN: Production Place

Notes

- 1. Above specification may be changed without notice. EVERLIGHT will reserve authority on material change for above specification.
- 2. When using this product, please observe the absolute maximum ratings and the instructions for using outlined in these specification sheets. EVERLIGHT assumes no responsibility for any damage resulting from use of the product which does not comply with the absolute maximum ratings and the instructions included in these specification sheets.
- 3. These specification sheets include materials protected under copyright of EVERLIGHT corporation. Please don't reproduce or cause anyone to reproduce them without EVERLIGHT's sconsent.

EVERLIGHT ELECTRONICS CO., LTD.

Office: No 25, Lane 76, Sec 3, Chung Yang Rd,

Tucheng, Taipei 236, Taiwan, R.O.C

Tel: 886-2-2267-2000, 2267-9936

Fax: 886-2267-6244, 2267-6189, 2267-6306

http:\\www.everlight.com

EVERLIGHT ELECTRONICS CO.,LTD. http://www.everlight.com Rev.: 1 Page: 6 of 6

Device Number: CDLE-329-014 Prepared date: 2004/10/6 Prepared by: LianXiang You