imall

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.


We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832 Email & Skype: info@chipsmall.com Web: www.chipsmall.com Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



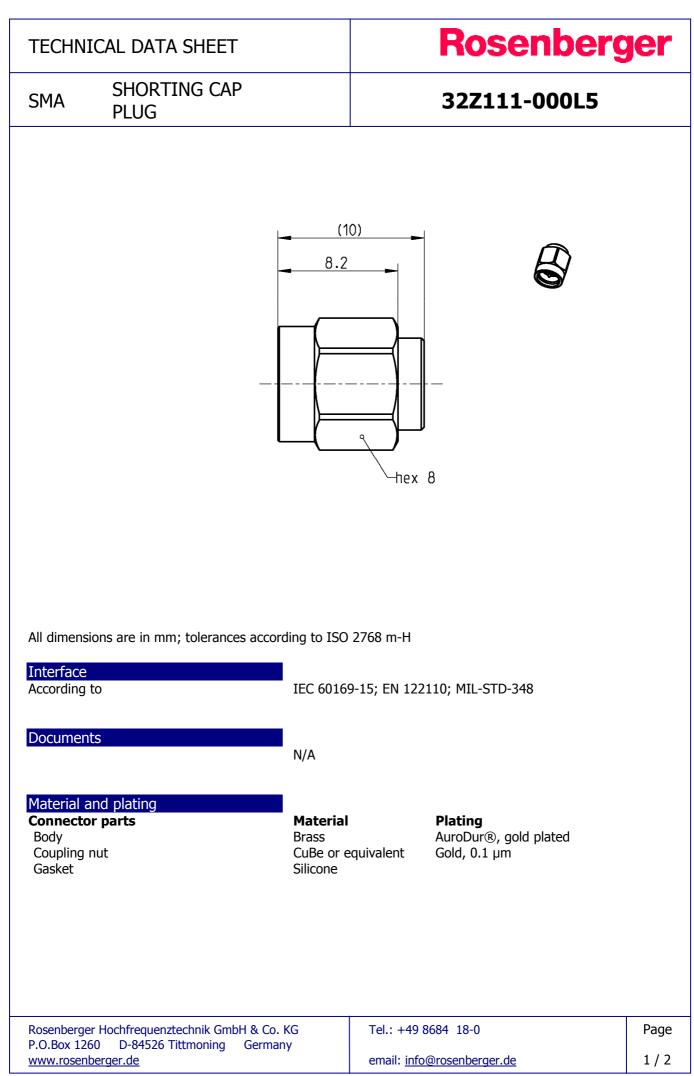

RF_35/11.05/3.1

SMA SHO PLUC Electrical data Impedance Mechanical data Mating cycles Coupling nut retentic Coupling test torque Recommended torque Recommental data Temperature range Thermal shock Corrosion Vibration Shock Moisture resistance RoHS	on	MIL-STD MIL-STD MIL-STD) 5 Nm +165 -202,)-202,)-202,)-202,)-202,)-202,	°C Meth. 107, Cond. B Meth. 101, Cond. B Meth. 204, Cond. D	000L5	
Impedance Mechanical data Mating cycles Coupling nut retentic Coupling test torque Recommended torque Environmental data Temperature range Thermal shock Corrosion Vibration Shock Moisture resistance RoHS	le	min. 500 ≥ 270 N max. 0.6 0.5 Nm -65°C to MIL-STD MIL-STD MIL-STD MIL-STD MIL-STD) 5 Nm +165 -202,)-202,)-202,)-202,)-202,)-202,	°C Meth. 107, Cond. B Meth. 101, Cond. B Meth. 204, Cond. D		
Mating cycles Coupling nut retentio Coupling test torque Recommended torqu Environmental data Temperature range Thermal shock Corrosion Vibration Shock Moisture resistance RoHS	le	≥ 270 N max. 0.6 0.5 Nm -65°C to MIL-STD MIL-STD MIL-STD MIL-STD MIL-STD	+165 -202, -202, -202, -202, -202, -202,	Meth. 107, Cond. B Meth. 101, Cond. B Meth. 204, Cond. D		
Temperature range Thermal shock Corrosion Vibration Shock Moisture resistance RoHS	a	MIL-STD MIL-STD MIL-STD MIL-STD MIL-STD)-202,)-202,)-202,)-202,)-202,)-202,	Meth. 107, Cond. B Meth. 101, Cond. B Meth. 204, Cond. D		
Tooling			nt	Meth. 213, Cond. I Meth. 106		
		N/A				
Suitable cables		N/A				
Weight Weight		3.12 g/p	ce			
our part and no stateme		ued as recomm	nendatio	wledge, nothing is intended as ronn to infringe existing patents.		
Draft Date	Approved	Date	Rev.	Engineering change number	Name	Date
Rong Fang 31/03/		21.07.16	e00	15-1629	I_Wallner	21.07.
	uenztechnik GmbH & C		Т	el.: +49 8684 18-0	·	Page

email: info@rosenberger.de

2/2

www.rosenberger.de