



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China





A Tallysman Accutenna® TW1721 / TW1722 Dual Feed Embedded BeiDou/Galileo/GPS/GLONASS Antenna

The TW1721/TW1722 is a compact, wideband GNSS antenna employing patented *Accutenna*® technology. This antenna provides accurate reception for all upper L- band GPS, GLONASS, BeiDou, and Galileo signals (L1, G1, B1, B1 BOC, B1-2, E1) and associated augmentation signals (WAAS, EGNOS and MSAS).

The TW1721/TW1722 features a novel 25mm dual feed wideband patch element that, in sharp contrast with its competitors, provides a truly circularly polarized response, with a typical axial ratio of less than 2dB over the full bandwidth. This provides a more linear carrier phase response and substantially improved multipath rejection for higher precision applications.



The built-in 35mm circular ground plane should ideally be augmented with a local system ground plane or reflecting surface (DC connection not required).

The TW1722 is the pre-filtered version of the TW1721. The pre-filter provides protection from strong near frequency or harmonic signals, such as LTE.

OEM antennas are easily detuned by the local environment. Tallysman offers custom tuning services for optimized integration into OEM end-user modules.

Applications

- High Accuracy BeiDou, Galileo, GPS & GLONASS
- Precision Agriculture, Mining & Construction
- Military & Security
- Avionics
- Law Enforcement & Public Safety
- Fleet Management & Asset Tracking

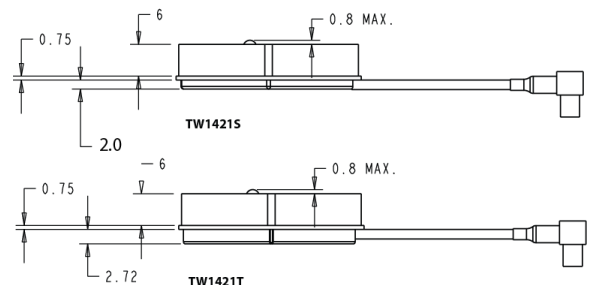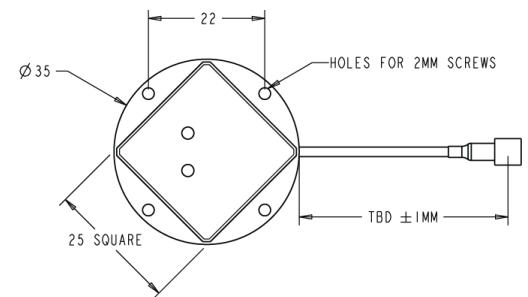

Features

- Compact Dual Feed Patch Element
- 2 dB bandwidth 1559-1606MHz
- Very low noise LNA: <1 dB (TW1721)
- Axial ratio: 2 dB typ
- LNA gain: 28 dB typ.
- Wide voltage input range: 1.8 to 16 VDC
- ESD circuit protection: 15KV
- Temperature Compensated Gain

Benefits

- Great multipath rejection
- Increase system accuracy
- Improved carrier phase linearity
- Excellent signal to noise ratio
- Great out of band signal rejection
- Compact form factor
- RoHS compliant
- Reliable performance



TW1721/TW1722 Dual Feed Embedded BeiDou/Galileo/GPS/GLONASS Specifications

At; Vcc = 3V, over full bandwidth, T=25°C

Antenna

Architecture	Dual, Quadrature Feeds
2 dB Bandwidth	47 MHz
Antenna Gain (with 100mm ground plane)	4.5dBic
Axial Ratio over full bandwidth	<2dB typ. 3dB max

Electrical

Filtered LNA Frequency Bandwidth		1559 MHz to 1606MHz
Polarization		RHCP
LNA Gain	TW1721	28dB typ., 25dB Min
	TW1722	27dB typ., 24dB Min
Gain flatness		+/- 2dB
Out-of-Band Rejection	TW1721	<1500MHz >40dB
		<1525MHz >45dB
		>1630MHz >45dB
	TW1722	<1500MHz >50dB
		<1525MHz >50dB
		>1640MHz >50dB
VSWR (at LNA output)		<1.5:1 typ 1.8:1 max.
Noise Figure	TW1721	1.0dB typ.
	TW1722	3.0dB typ.
Supply Voltage Range (over coaxial cable)		+1.8 VDC min to +16 VDC max (+12 VDC recommended max)
Supply Current		10mA typ. 15mA max. (@ 85°C)
ESD Circuit Protection		15KV air discharge

Mechanicals & Environmental

Mechanical Size	35mm dia. x 7.25mm
Cable	micro-coax or RG174 coax
Operating Temp. Range	-40°C to +85°C
Weight	18g
Attachment Method	Adhesive or M2 screw mount
Environmental	RoHS and REACH compliant
Shock	Vertical axis: 50G, other axes: 30G
Vibration	3 axis, sweep = 15 min, 10 to 200Hz sweep: 3G
Warranty	One year – parts and labour

Ordering Information

Part Numbers:

TW1721 – GNSS L1 antenna,	33-1721-xx-yyyy-zz
TW1722 – Pre-filtered GNSS L1 antenna	33-1722-xx-yyyy-zz

Where xx = connector type; yyyy = cable length in mm; and zz = assigned by Tallysman

Please refer to the Ordering Guide (<http://www.tallysman.com/wp-content/uploads/Current-Ordering-Guide.pdf>) for the current and complete list of available connectors.



36 Steacie Drive, Ottawa ON K2K 2A9 Canada

Tel 613 591 3131

Fax 613 591 3121

sales@tallysman.com

The information provided herein is intended as a guide only and is subject to change without notice. This document is not to be regarded as a guarantee of performance. Tallysman Wireless Inc. hereby disclaims any or all warranties and liabilities of any kind. © 2011 Tallysman Wireless Inc. All rights reserved.

Rev 1.8