



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China





A Tallysman Accutenna® Antenna TW2405/TW2407 Embedded GPS/GLONASS Antenna

The TW2405/TW2407 employs Tallysman's unique *Accutenna* technology covering the GPS L1, GLONASS L1 and SBAS (WAAS, EGNOS & MSAS) frequency bands (1574 to 1606 MHz). It is especially designed for precision industrial, agricultural and military OEM applications. It provides truly circular response over its entire bandwidth thereby producing superior multipath signal rejection.

The TW2405/TW2407 features a dual-feed wideband patch element, with a two stage Low Noise Amplifier, comprised of one input LNA per feed, a mid section SAW to filter the combined output, and a final output gain stage. This configuration provides excellent axial ratio that is constant across the full frequency band. An optional tight pre-filter is available with part number TW2407 to protect against saturation by high level sub-harmonics and L-Band signals.

The TW2405 /TW2407 comes in a compact circular form factor with a built-in 56 mm diameter ground plane.

Also consider the TW2406 / TW2408 which have a more secure mounting method. The TW2406 / TW2408 is electronically identical to the TW2405 / TW2407. The TW2406 / TW2408 has a larger PCB with drilled holes for more secure mounting. You can view these on the Tallysman website.



- High Accuracy & Mission Critical GPS
- Precision Agriculture, Mining & Construction
- Military & Security
- Avionics
- Law Enforcement & Public Safety
- Fleet Management & Asset Tracking

Features

- Great axial ratio: <3 dB over full bandwidth
- Low noise LNA: 1 dB
- High rejection SAW filter
- High gain: 28 dB typ.
- Low current: 10 mA typ.
- ESD circuit protection: 15 KV
- Wide voltage input range: 2.5 to 16 VDC

Benefits

- Excellent multipath signal rejection
- Increased system accuracy
- Excellent signal reception
- Great out of band signal rejection
- Compact form factor
- RoHS compliant

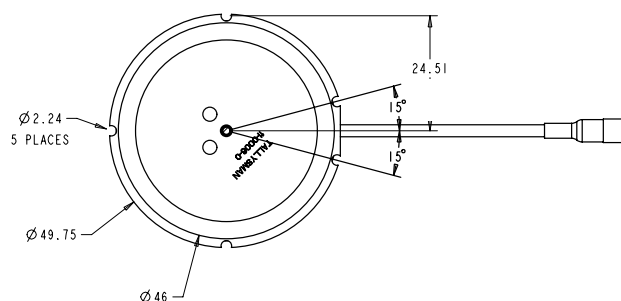



TW2405/TW2407 Embedded GPS/GLONASS Antenna

Specifications: Vcc = 3V, over full bandwidth, T=25°C

Antenna

Architecture	Dual, Quadrature Feeds
0.5 dB Bandwidth	31 MHz
Antenna Gain (with 100mm ground plane)	4.25 dBic
Axial Ratio over Bandwidth (over full bandwidth)	1dB typ. ≤3 dB max.

Electrical

Architecture	One LNA per feed line, mid section SAW filter (TW2405) One SAW Filter & LNA per feed line, mid-section SAW filter (TW2407)	
Filtered LNA Frequency Bandwidth	1574 to 1606 MHz	
Polarization	RHCP	
Gain	28 dB min., 1575.42 to 1606 MHz (TW2405) 25 dB min, 1575.42 to 1606 MHz (TW2407)	
Gain flatness	+/- 2 dB, 1575 to 1605 MHz	
Out-of-Band Rejection	<1500 MHz	>32 dB (TW2405) >50dB (TW2407)
	<1550 MHz	>25 dB (TW2405) >50 dB (TW2407)
	>1640 MHz	>35 dB (TW2405) >70 dB (TW2407)
VSWR (at LNA output)	<1.5:1 typ. 1.8:1 max.	
Noise Figure	1 dB typ. (TW2405)	<3.5 dB typ. (TW2407)
Supply Voltage Range (over coaxial cable)	+2.5 to 16 VDC nominal (12 VDC recommended maximum)	
Supply Current	15 mA typ, 25mA Q max (85°C).	
ESD Circuit protection	15 KV air discharge	

Mechanicals & Environmental

Mechanical Size	49.75 mm dia. x 7.8 mm H
Cable	RG174
Operating Temp. Range	-40 to +85°C
Weight	35 g
Attachment Method	Adhesive or screw mount
Environmental	RoHS compliant
Shock	Vertical axis: 50 G, other axes: 30 G
Vibration	3 axis, sweep = 15 min, 10 to 200 Hz sweep: 3 G

Ordering Information

TW2405: 33-2405-xx-yyyy-zz

TW2407: 33-2407-xx-yyyy-zz

Where xx = type of connector yyyy = cable length in mm and zz = reserved for Tallysman's use

Please refer to the Ordering Guide (<http://www.tallysman.com/wp-content/uploads/Current-Ordering-Guide.pdf>) for the current and complete list of available connectors.

Tallysman Wireless Inc

36 Steacie Drive
Ottawa ON K2K 2A9 Canada
Tel +1 613 591 3131

Fax 613 591 3121

sales@tallysman.com

The information provided herein is intended as a guide only and is subject to change without notice. This document is not to be regarded as a guarantee of performance. Tallysman Wireless Inc. hereby disclaims any or all warranties and liabilities of any kind. © 2011 Tallysman Wireless Inc. All rights reserved.

Rev 5.5