



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

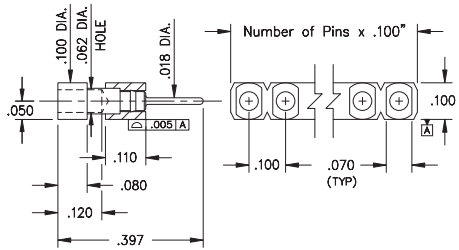
Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



INTERCONNECTS

SERIES 310, 330, 351 • .100" GRID (.018" DIA. PINS), SURFACE MOUNT HEADERS AND SOCKETS • SINGLE ROW STRIPS


Mates with Series 310...023 Surface Mount Z-Bend Socket (See Fig. 3)



Coplanarity .005". For pin counts >10 positions, consult Technical Support.

FIG. 1

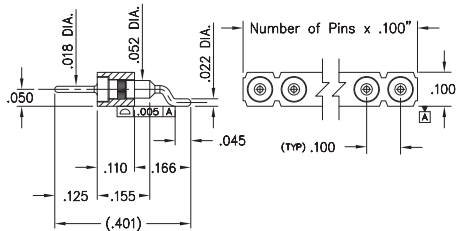
Mates with Series 310...023 Surface Mount Z-Bend Socket (See Fig. 3)



Coplanarity .005". For pin counts >10 positions, consult Technical Support.

FIG. 2

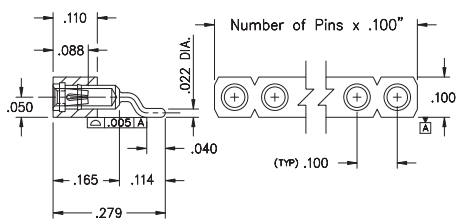
Mates with Series 351...002 and 330...027 Surface Mount Header (See Fig. 1 & 2)



Coplanarity .005". For pin counts >10 positions, consult Technical Support.

FIG. 3

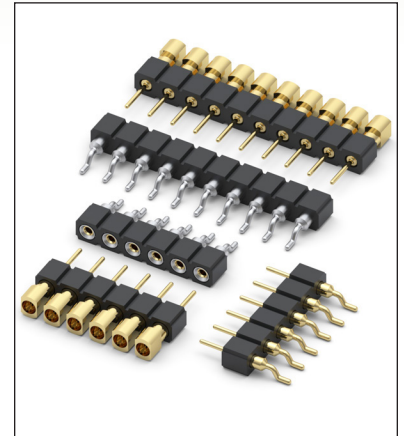- Series 351 horizontal surface mount headers are available with .018" dia. pluggable pins (MM #5102). Series 330 horizontal surface mount z-bend headers use MM #3027 pins. See page 224 for details
- Series 310 horizontal surface mount Z-Bend sockets uses MM #1023 receptacles that accept pin diameters from .015"-.025". See pages 171 for details
- Insulators are high temperature thermoplastic, suitable for all soldering operations
- Ideal for daisy chaining parallel boards



ORDERING INFORMATION


















FIG. 1	Series 351...002 .018" Dia. Surface Mount Header	351-10-1__-40-002000
	Specify number of pins	10 02-10
FIG. 2	Series 330...027 .018" Dia. Surface Mount Z-Bend Header	330-XX-1__-40-027000
	Specify number of pins	10 02-10
  		
SPECIFY PLATING CODE XX=		10  40 
Pin Plating 	10 μ" Au	200 μ" Sn

FIG. 3	Series 310...023 .018" Dia. Surface Mount Z-Bend Socket	310-XX-1__-40-023000				
	Specify number of pins	10 02-10				
  						
SPECIFY PLATING CODE XX=		91  93  99  41  43  44 				
Sleeve (Pin) 	200 μ" Sn/Pb	200 μ" Sn/Pb	200 μ" Sn/Pb	200 μ" Sn	200 μ" Sn	200 μ" Sn
Contact (Clip) 	10 μ" Au	30 μ" Au	100 μ" Sn/Pb	10 μ" Au	30 μ" Au	100 μ" Sn

